SYLVANIA

Concord



PRODUCT GUIDE

LUMINAIRES

2026

sylvania-group.com

Digital | Lighting | Solutions

Building your projects together - Committed to a lasting partnership

4 pillars and all the solution blocks to choose from to build your projects

Configuration & Installation

- **Audit**
- **Design**
- **Consultations**
- **Storage and logistic**
- **Installation**
- **Commissioning**



Efficient Lighting & Intelligent Control

- **Lighting and smart control**
- **Solar equipment**
- **Tailor-made design**

Finance & ROI

- **Financing plan**
- **Local incentive**
- **Lease to buy**

Operation & Maintenance

- **Data Monitoring**
- **Metering**
- **Training**
- **Maintenance and warranty (extension)**

BUILD&TRUST
By Sylvania Group

- ☑ You receive full support from our teams at every stage of your projects.
- ☑ You have access to all Sylvania Group solution blocks to build your projects efficiently.
- ☑ You benefit from long-term support to ensure ongoing success via the Build & Trust Contract.



SYLVANIA
Group

Eastern Europe – General Overview

We operate in over **40 countries** and trade in **50 countries** across **Europe & the Middle East (EMEA), Latin America (LATAM), and Asia**.

Our **Eastern European team supports the following countries**:

- Hungary
- Czech
- Slovakia
- Serbia
- Croatia
- Slovenia
- Bosnia & Herzegovina
- Montenegro
- North Macedonia
- Albania
- Moldova
- Belarus
- Kosovo
- Poland
- Romania
- Bulgaria
- Ukraine
- Kazakhstan
- Estonia
- Latvia
- Lithuania



- *Offices/Representative*
- *Agents Representation*
- *Distribution Centre*

If you have any questions, please contact the **Regional Sales Manager** or send us a message at the **CEE general email**:

info.cee@sylvania-lighting.com

SYLVANIA Concord

Made in Europe know-how at your service

Sylvania Group is a major player in the global lighting market offering innovative and sustainable solutions for professionals and consumers. We are present in more than 50 countries with 1,200 employees worldwide. With over 120 years of expertise, Sylvania Group manufactures and markets eco-responsible and digital lighting solutions. We support our customers throughout their projects with a comprehensive range of services. Our expertise and capacity for innovation are underpinned by our two historic brands, Sylvania and Concord. Energy efficiency, sustainable development, digitalisation, well-being and quality of light are at the heart of our mission.

- Innovative & Solutions Centres
- Offices / Representatives
- Agents Representation
- Factories
- Distribution Centres



Made in Europe

We take pride in having local Research and Development and production facilities throughout Europe.
Our factories and production units are located in France, and Germany. Our Research and Development offices are a leading part of our organisation and allow us to be at the forefront of technological innovations, and to be constantly on the lookout for new developments, whether it be emerging uses by occupants, environmental challenges, or compliance with new regulatory standards. This company structure is a guarantee of quality, and a reflection of our strong social, work-policy and environmental commitments. On this point, the manufacturing process and the European design approach significantly reduce the carbon footprint of our products.

Tailor-made products and services

Our factories offer tailor-made solutions to meet our customers' specific needs. We aim to develop environmentally efficient lighting solutions which comply with the requirements of our clients. Once the needs are clearly identified, our Research & Development team, with the help of our production units, make sure that we create the best products and solutions for our clients.
Apart from being a manufacturer, Sylvania Group also offers services, designed to support our clients from A to Z. From a detailed analysis of your lighting systems, the installation and optimisation of your project, compliance with regulations, and financing solutions, Sylvania Group is an expert at your side, each step of the way.

Production in our Erlangen factory in Germany

Factories

- **38 000 m²** of combined factory surface area in France (Saint-Etienne) and Germany (Erlangen)



Expertise

- Over **100 years** of experience
- Personalization of lighting products
- Quality control at every step



Sylvania's ESG Commitment

Committed to sustainable lighting solutions

Each time we develop a new product and service we engage sustainable practices to deliver optimal lighting solutions while minimising our environmental impact. We employ comprehensive waste and energy conservation protocols that involve everyone in the business and extend to all areas of our operations.

We believe a responsible business is a healthy business and the prosperity of business and society is closely connected. Our mission is to bring technology, creativity, and innovation together through our products, services, and people to enhance energy efficiency, improve sustainability, increase connectivity, and promote wellbeing.

By mobilising our collective strength and strategic commitments to focus on creating healthy communities and a healthy environment, we can achieve long-term value and have a positive impact on society.



Intelligent lighting for the future

Sylvania invests in delivering advanced solutions that enhance people's lives and help create better environments. Innovations such as SylSmart® and 360 services offer so much more than quality lighting solutions, they represent the foundations on which future innovation can be built and deliver sustainable cost and energy efficiencies.

Recognised for our contribution

Sylvania is a business with a culture that places its people at the centre of all it does. We provide a professional, inclusive environment that helps our employees excel at everything they do, with policies in place to ensure we continue to evolve and adapt to the world around us. We want a career with Sylvania to be challenging, rewarding, and fulfilling, where our people can reach their potential both personally and professionally. We are a progressive and innovative global business dedicated to delivering excellent products and services to our customers and an inclusive work environment for our employees. We value our people, their experience, their ideas, and their contribution and we thrive on empowering each other so we can grow and develop together.

Our approach to create an inclusive and sustainable business is recognised through our silver certification from Ecovadis, one of the world's most recognised business sustainability ratings. This measures non-financial management systems and sits alongside our internal metrics, which we evaluate against industry best practices in a global context and employ continuous improvement principles to ensure we remain ahead in our market.





Made in Europe

Our heritage as a leading manufacturer of quality lighting solutions dates back more than 100 years and we are proud of our European production history. With manufacturing and R&D facilities located in France, Germany, we can design, develop, and produce innovative lighting solutions and deliver them to market with pace and agility whilst significantly reducing our carbon footprint.
Our European facilities are ISO9001, ISO14001, and ISO50001 certified, underlining our alignment with the principles of responsible manufacturing, and our continued commitment to reducing emissions and managing our waste.

Technology plays a critical role in increasing energy efficiency while enhancing luminaire performance and our comprehensive portfolio contains an extensive range of lighting solutions manufactured to the highest quality standards that offer extended lifetimes.
We take responsibility for managing the full life cycle of products and have plans to embrace the principles of the circular economy in our approach to sustainability on future product development projects. Placing greater emphasis on product design helps us proactively reduce emissions and manage waste. The interchangeable components of some of our products increases their lifecycle and makes them in-line with our circular economy approach.

Sylvania's ESG pledge by 2030



To become a net-zero emissions company


To electrify our company car fleet


To create and implement a circular economy business model



"We have a clear commitment as a business: to be a leader and role model not just in lighting solutions but globally as a business that priorities sustainability in our business operations. We are focused on being recognised as Climate Champions not just by policies but by activities that make a positive and sustained difference to our carbon and environmental footprint. But also we are deeply passionate about our staff and partners throughout the supply chain and that they are treated fairly, with decency and in line with global and local standards. Sylvania Group lives and breathes our ESG values, and we want that to be clear in all of our products and services that we deliver to our customers"

Enrique Castaño - Sustainability Manager EMEA

Table of Contents

Introducing Sylvania Group 4
Challenges and Regulatory Requirements 5
Sylvania Group's CSR Commitments 6
What's New for 2026 16
Digital Solutions and Services 18

Lighting fixtures 31

Recessed Modular

OfficeLyte page 32


Optix Recessed page 33


Optix Recessed 4 Cells page 34


Optix Recessed Asymmetric page 35


Rana Neo Recessed page 35


Rana Helios page 36


OptiClip page 37

OptiClip TERRA™ page 39

Quadro page 39


Quantum page 41


Panel IP66 Cleanroom page 42


Panel IP65 Cleanroom page 43

START Panel page 43


START eco Panel page 44


Surface & Suspended

Optix Surface page 45


Optix Surface MPO page 46


Optix Surface Asymmetric page 47


Rana Neo Surface page 47


Areum Suspended page 49


Areum Wall page 49


Gradeo Surface page 50

Deltawing G2 page 50


Sylmaster LED
page 51



Colossal
page 51



Freestanding

Areum Floorstanding
page 53



Linear

Continuum Plus
page 53

Optix Linear Recessed
page 58



Optix Linear Surface
page 59



Rana Linear Recessed
page 60



Rana Linear Surface
page 61

Otao Linear
page 62

Downlights

Equinox
page 65



Solstice
page 65



Insaver
page 69



Nexo
page 70



Start Downlight IP54
page 71



START Downlight 5in1
page 72

START Downlight Flat Dim
page 72

START eco Downlight
page 73

Recessed Spotlights

Solstice page 74



Domino page 79



Signo page 79



Ludospot 111 page 80



Obico page 80



Tucana page 81



Start Spot Alu page 81



Start Spot PIR page 83



Start Spot page 83



Inset page 84



Surface wall and ceiling

Solstice page 85



Giotto page 86



Novella page 88



Pixo Surface page 89



START Surface IP54 Multipower page 89

START Surface Slim IP54 page 90

Decorative pendants

Nilo page 91

Solstice page 91



Pixo page 92



Flexible systems

Flex Pro page 92



Flex Pro Drivers page 93



Aluminium Profile page 94



Tracklights

Concord Beacon Muse II page 96

Concord Beacon Muse XL page 97

Concord Beacon Accent page 97

Concord Beacon page 98

Concord Beacon XXL page 99

Concord Beacon Wallwash page 100

Concord Beacon Projector page 101

Pixo Zoom page 101

Pixo page 102

Pixo Food page 103

Pixo Housing page 103

Raxa page 105

Pixo Line page 107

Tracks

Lytespan page 107

Lytespan accessories page 108

OneTrack page 114

OneTrack accessories page 115

Weatherproof

Resisto page 121 NEW

Resisto GRP page 122

START Waterproof Tubular page 122

START Waterproof Slim page 124

START eco Waterproof page 124

START Eco Batten IP65 page 125

START Waterproof Housing page 125

Batten

Start Batten

page 126

Highbay

Rocks



page 128

Sylvania Granit



page 130

Start Highbay



page 132

Sportsbay



page 132

Trunking systems

Isoline



page 133

Rail & Trunk System



page 134

RetrunKit



page 135

Floodlights

Kalani



page 137

START Flood IP65



page 140

Road & Post Top

Zephyr



page 141

Landscape

Novella



page 142

Interrata



page 142

START Bollard



page 143

START Surface Wall Cube



page 144

Muro Surface



page 144

SylSmart Standalone Products

SylSmart Standalone Accessories
page 146


Detached Sensors
page 146


Colour Controllers
page 146


DALI Controllers
page 146


SylSmart Connected Products

SylSmart Connected Gateway
page 147


SylSmart Connected Emergency
page 147


SylSmart Connected Detached Sensors
page 147


SylSmart Connected Switches
page 147


SylSmart Connected Accessories
page 148


SylSmart Components

SylSmart DALI Controllers
page 148


SylSmart DALI Relays
page 149


SylSmart DALI Emergency
page 149


LiFeSafe PRO Standalone Emergency

LiFeSafe PRO Downlights
page 150


LiFeSafe PRO Twin Spot
page 150


LiFeSafe PRO Track
page 151


LiFeSafe PRO Bulkhead
page 151


LiFeSafe Monitor
page 152


LiFeSafe PRO Exit Signs

LiFeSafe PRO Exit Bulkhead
page 152


LiFeSafe PRO MultiFix Exit
page 153


LiFeSafe PRO Multi Exit
page 153


Standalone Emergency

LiFeSafe Downlight



page 154

LiFeSafe Bulkhead



page 154

Exit Signs

LiFeSafe MultiFix



page 155

LiFeSafe Exit



page 155

LiFeSafe Conversion Kits

LiFeSafe Conversion Kits



page 156

Wireless Emergency

SylSmart Connected Emergency



page 156

Grow Lights

Gro-Lux® PRO Frame 720 FS Plus



page 156

Insect Control

LED Linear UV-A



page 156

Fluorescent Linear UV-A



page 157

Fluorescent Compact UV-A



page 157

Circline UV-A



page 158

Helios LED Lamps White

page 158

Helios LED Lamps Coloured



page 159

Helios Green



page 159

Alphabetical index	160
Numerical index	162
IP and IK protection ratings	179
Symbol guide	180
Terms and conditions of sale	181

What's New for 2026



OptiClip
page 37



OptiClip TERRA™
page 39



Quantum
page 41



Panel IP65 Cleanroom
page 43



START Panel
page 43



Solstice
page 74



Signo
page 79



Start Spot PIR
page 83



Novella
page 88/142



Pixo Food
page 103



Resisto
page 121



Resisto GRP
page 122



Rocks
page 128



Sylvania Granit
page 130

SYLVANIA

Empowering your drive to net zero

SylSmart® Energy

SylSmart® Energy is an advanced energy monitoring and analytics platform that empowers businesses to take action regarding their carbon emissions and energy consumption.

+ **Understand your current usage**
+ **Identify areas of potential improvement**
+ **Create and implement energy reduction strategies**
+ **Visualise, monitor and verify those strategies**
+ **Make the move to green energy sources**



sylvania-group.com

Digital | Lighting | Solutions

SYLVANIA



DIGITAL SOLUTIONS & SERVICES

SylSmart® Connected

Unlock the intelligent building

Flexible and efficient

SylSmart® Connected is a versatile, decentralized lighting solution utilizing a mesh network that simplifies control across buildings, offering exceptional motion coverage and a full suite of smart features.


Smart lighting solutions to suit your space



- A Office space
- B Industry space
- C Parking space

Tailored Lighting Control for Personalised Spaces

ASHRAE BACnet®

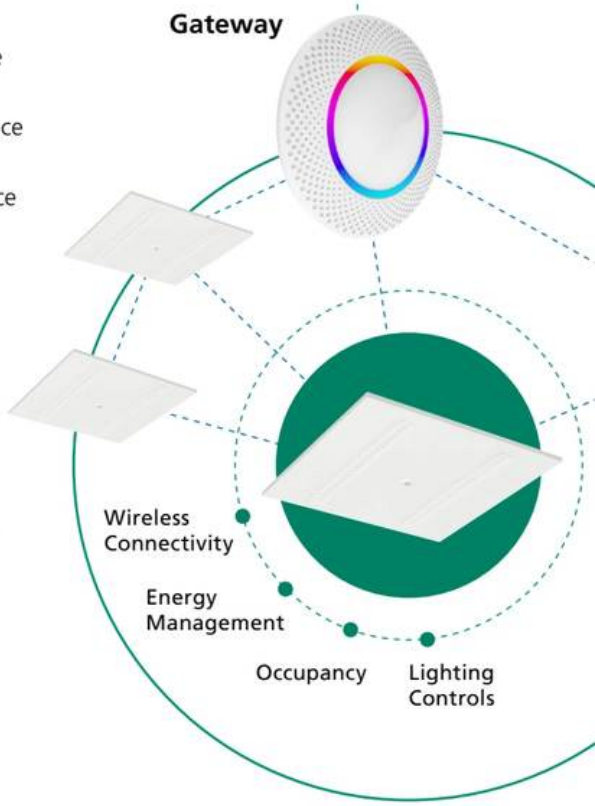


Intelligent Lighting Solutions for your space

SylSmart® Connected utilises Bluetooth® NLC technology included in all our sensors to optimise lighting efficiency and comfort. It enables personalized control and support both individual and group settings.

90%
CONFIGURE OFFSITE

PLAN
Visualise your needs

DESIGN
Expertly with Profiles

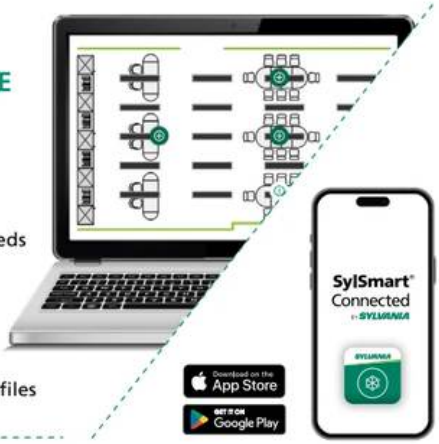

10%
CONFIGURE OFFSITE

IMPLEMENT
Rapid commissioning

OPTIMISE
Tailored configuration

Technology Partner
SILVAIR

Bluetooth® | NLC

Find out more

- Save time on site
- Control costs
- Minimal disruption to end user

Intelligence & Smart Controls

Easy Maintenance

Rapid Installation & Scalable

Cyber secure, Interoperable & Robust

SylSmart® Connected Pro

Paving the way to data driven efficiencies

Advanced Building Management

SylSmart® Connected Pro is a digital platform that enhances SylSmart® Connected by turning lighting infrastructure into actionable building intelligence. It provides real-time insights to improve energy efficiency, space usage, and overall performance—supporting smarter, data-driven decisions.



SylSmart® Connected Pro

Turn Insight Into Action

- User friendly visualisations
- Advanced Analytics
- Interactive Floorplans
- Remote Control & Scheduling
- Intelligent Notifications
- Asset Overview
- Proactive Fault Reporting
- Open Integration

SYLVANIA

Gateway



bsi BIM Design & Construction Capital Delivery ISO 19650-1 and -2 VERIFIED VC 737955 2021

Integration
Integrate data from SylSmart® Connected Pro into 3rd party systems (MQTT, REST, API*)

*BACnet, MQTT and REST APIs are protocols used to enable different devices and systems to communicate with each other and share information. For example, smart building and BMS systems.

Environment

Air Quality
HVAC
Temperature
Wayfinding
Emergency Response
Real-time Location Services
Safety & Security
Locate People & Things
Smart Surveillance
Meeting Booking
Workflow Optimisation

Other Systems

Find out more

www

Remote Management

Comprehensive Connectivity

Develop New Insights

Cyber Secure

SYLVANIA

SylSmart® Connected

Unlock the intelligent building

Applications


Office & Education


Logistics & Industry


Data Centres


Retail


Parking

Discover lighting fixtures with SylSmart® Connected lighting control

Recessed Modular	Pages
OFFICELYTE	36
OPTIX RECESSED	37
RANA NEO RECESSED	39
OPTICLIP	41
OPTICLIP TERRA™	43
QUADRO	43
QUANTUM	45
START PANEL	47
Surface & Suspended	
OPTIX SURFACE	49
OPTIX SURFACE MPO	50
RANA NEO SURFACE	51
AREUM SUSPENDED	53
COLOSSAL	56
Linear	
CONTINUUM PLUS	58
OPTIX LINEAR RECESSED	62
OPTIX LINEAR SURFACE	63
RANA LINEAR RECESSED	64
RANA LINEAR SURFACE	65
Downlights	
EQUINOX	69
SOLSTICE	69
INSAVER	73
Recessed Spotlights	
SOLSTICE	78
Surface wall and ceiling	
SOLSTICE	89
Tracklights	
PIXO	106
Weatherproof	
RESISTO	125
Highbay	
SPORTSBAY	136

Learn more:
sylvania-group.com/connected

BIM Design & Construction Capital/Delivery ISO 19650-1 and -2 VERIFIED
VC 737955 2021


Up to 8000
connected
luminaires

SYLVANIA

SylSmart® Standalone

Maximum control. Minimum installation.

Applications



Museum



Hospitality



Retail



Detached sensors

Enable energy savings with a range of SylSmart Standalone enabled wireless presence and lux sensors.



Colour Controllers

Create ambience and brand identity with SylSmart Standalone wireless RGBW controllers.



DALI Controllers

Extend wireless control of devices, whilst reducing the number of components, wiring, commissioning time and cost.

Learn more:
sylvania-group.com/standalone

Discover lighting fixtures with SylSmart® Standalone

Recessed Modular	Page
OPTIX RECESSED	37
OPTIX RECESSED ASYMMETRIC	39
RANA NEO RECESSED	39
OPTICLIP	41
Surface & Suspended	
OPTIX SURFACE	49
OPTIX SURFACE MPO	50
OPTIX SURFACE ASYMMETRIC	51
RANA NEO SURFACE	51
AREUM SUSPENDED	53
AREUM WALL	53
DELTAWING G2	54
COLOSSAL	55
Linear	
OPTIX LINEAR RECESSED	62
OPTIX LINEAR SURFACE	63
RANA LINEAR RECESSED	64
RANA LINEAR SURFACE	65
Downlights	
EQUINOX	69
SOLSTICE	69
INSAVER	73
START DOWNLIGHT IP54	75
Recessed Spotlights	
SOLSTICE	78
Surface wall and ceiling	
SOLSTICE	89
Flexible systems	
FLEX PRO DRIVERS	98
Tracklights	
CONCORD BEACON MUSE II	100
CONCORD BEACON MUSE XL	101
PIXO	106

SylSmart® Standalone

Maximum control, minimum installation



Elevate the visitor experience and enhance product presentation with SylSmart® Standalone— an intelligent wireless lighting control solution built for museums, galleries, and retail environments.

Easily configure lighting scenes that shift with your exhibitions, enhance focal points, and guide attention exactly where you desire. Whether illuminating fine art, historical artifacts, or premium merchandise, the system delivers dynamic, precise lighting that adapts effortlessly to your space.

Built on robust, secure Bluetooth® mesh technology, SylSmart® Standalone **enables rapid installation** that has limited impact on sensitive infrastructure. It's lighting control that's flexible, reliable, designed to support the storytelling and create an immersive experience for your visitors.



Maximum Control

Minimum Installation

Secure

Intuitive

SYLVANIA

Introducing

Power™

A more efficient present
A brighter future

Sylvania is excited to introduce an end-to-end project solution that encompasses services and products to meet your energy requirements, **building your energy projects together.**

What are the benefits?

- **Economic savings**
- **Real-time energy monitoring**
- **Move towards net zero**
- **Access to tax benefits and subsidies**
- **Energy autonomy**


Power™ Sun
All of your PV self consumption needs to help power your company to net zero.
Power™ Cell
Solar storage solutions to maximise the profitability of your solar installation.
Power™ View
Advanced energy monitoring and analytics platform.
Coming soon - 2026
Contact your local Sylvania Group representative to find out more about starting your Power™ journey today.
www
sylvania-group.com/power-overview

360 Services™

An ecosystem that is both comprehensive and effective, designed to assist you with your projects.

Assess

We assess the challenges you face and understand your pain points. We use our expertise to identify opportunities for improvements and make strategies to help you create resilient, future-proof, efficient and compliant buildings.

Audit
Prototype
Consultancy
Lighting Design

Manage

We craft solutions that precisely meet your needs using our Digital Solutions and Services. Sylvania Group delivers optimal solutions that meet your return on investment targets. We manage the whole process, ensuring best results.

Project Management
Delivery

Understand pain-points
Paving the way & support
Execute & fully optimise
Maintain & improve

For complete peace of mind

Implement

Let us manage the heavy work and let you focus on your business. Our aim is to deliver your requirements, precisely, with minimal disruption, on-time and on budget to a high standard.

Installation
Commissioning

Aftercare

Partnership with Sylvania Group lasts forever. Passionate, local teams are here to support you and make lasting partnerships you can trust. On-going maintenance and local support are crucial for long-term partnerships, compliance, and efficiency plans.

Extended Warranty
Software Updates
Training
Maintenance
After Sales

Contact your sales representative for a tailored project support

Standalone | Connected | Connected Pro | Energy

Ordering guide

Sylvania's 360 Services product range serves as a comprehensive guide for your project, ushering it through each crucial stage, from its very conception to successful completion. This all-encompassing toolkit is designed to facilitate projects of any magnitude or complexity, providing you with the assurance of seamless management and peace of mind. Allow Sylvania to empower your business with the intelligent tools it requires. Let us show you the way.

Item Code	Description	Definition
Assess		
V990003	Prototype Product Sale (STE)	Design and production of a bespoke product based on your specification
V990007	Prototype Product Sale (NHV)	
V990008	Prototype Product Sale (ERL)	
V990051	Audit fee (INT)	Surveying the existing lighting situation at site, we can provide an asset register, check compliance & pinpoint saving opportunities
V990052	Lighting design (INT)	Our experts design lighting solutions that guarantee compliance and energy efficiency for your installation
V990004	Subsidy Collection (INT)	Sylvania's team can assist you in the aquisition of subsidies and funding for your project
Manage		
V990027	Storage of goods (INT)	We can store goods in our facility or in our partners storage facilities and deliver to site in line with your requirements
V990032	Storage of goods (EXT)	
V990028	Waste Recycling and Collection (EXT)	We can arrange for the compliant handling of obsolete materials
V990074	Shipping cost Std (INT)	We can facilitate customised deliveries to suit your project timelines
V990068	Shipping cost Std EU (EXT)	
V990069	Shipping cost 48h EU (EXT)	
V990070	Shipping cost 24h EU (EXT)	
V990089	Temporary Surcharge (INT)	Code for adding extra price when selling price quoted needs to be higher to cover FX and raw material changes - Must be approved by Country management and used only on orders in Order Book
V990048	Project Management (INT)	Our specialized Project Managers connect cross-company teams to deliver projects to defined timelines & budgets.
Implement		
V990011	Installation (EXT)	Our approved partners provide professional and hassle-free installation of their products, ensuring proper setup and functionality while saving time and effort.
V990012	Installation GBP (EXT)	
V990053	Installation Estimate (INT)	Our indicative estimate for installation of proposed fixtures (subject to final audit). Code for initial quotations only
V990018	Commissioning EU (EXT)	Our approved specialists ensure efficient and optimized set up to suit your operation
V990039	Commissioning (INT)	Our internal team of specialists ensure efficient and optimized set up to suit your operation
V990047	Electrical Testing & Commissioning (EXT)	Testing of electrical installations by third party
Aftercare		
V990005	Software update (INT)	The update of software by Sylvania
V990006	Software update (EXT)	The update of software by third parties
V990049	LIGHTING MAINTENANCE CUSTOM (EXT) 1 YR	Tailored maintenance service based on your specific requirements, currency (EUR)
V990101	LIGHTING MAINTENANCE REMOTE (INT) 1 YR	Remote maintenance packaged designed to support your project after installation
V990111	LIGHTING MAINTENANCE PRO (INT) 1YR	Professional maintenance package including scheduled on site visits
V990038	TRAINING SERVICE (INT)	Training of customer or installer by Sylvania
V990091	Extended Warranty - 5 year	For customers who are looking for service security to an extended time beyond standard product warranty. Warranty to be approved by Sylvania before offering to customer.
V990092	Extended Warranty - 6 year	
V990093	Extended Warranty - 7 year	
V990094	Extended Warranty - 8 year	
V990095	Extended Warranty - 9 year	
V990096	Extended Warranty - 10 year	

Learn more:
sylvania-group.com/360services

Up to

73%

Energy Savings

1,5 years


Return On Investment

thanks to

SylSmart®
Connected





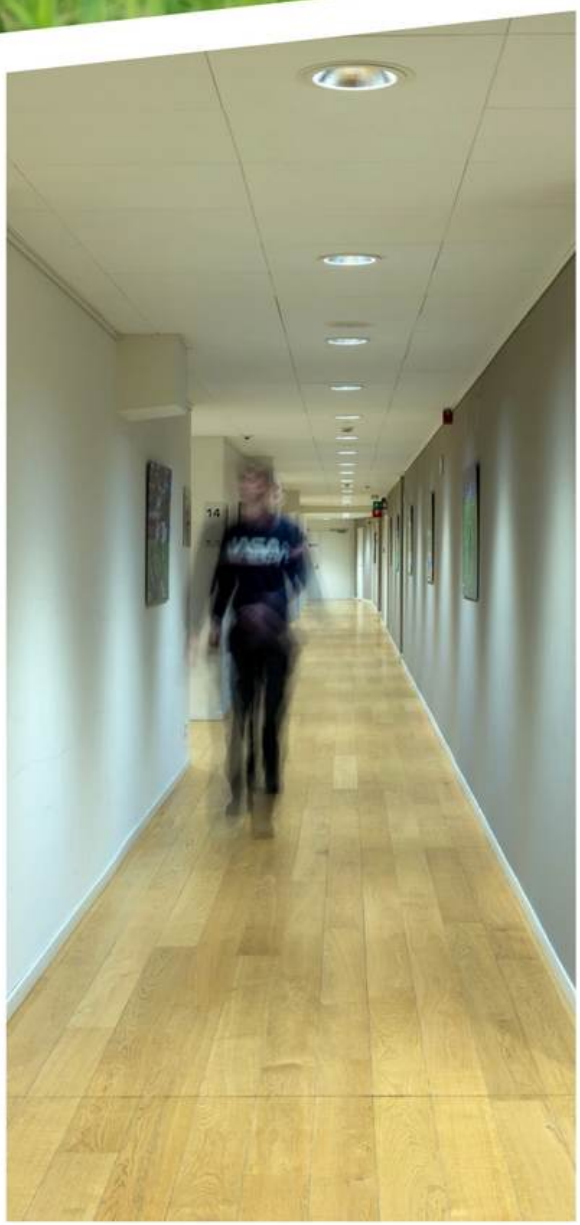




LUMINAIRES

OfficeLyte

Concord



High-performance architectural LED recessed luminaire offering high visual comfort (UGR<19). Microprismatic optics, semi-direct light distribution for a smooth transition between illuminated facades and the ceiling. Photobiological risk group GR0, CRI>80 & 90, very low flicker <5%. High efficiency (HE) up to 140lm/W - High output (HO) up to 134lm/W. Management: Dimmable DALI, push-dim or wireless switch without battery (SylSmart models) / Bluetooth: SylSmart Connected (SSA) with or without integrated sensor. 3000K & 4000K versions. Closed housing (RAL 9016 white finish) reduces dust penetration and improves the luminaire's maintenance factor. Lifetime: 93,000 hrs (L80).
5-year warranty.





Officelyte 600x600 model - CRI80		
2069512	OFFICELYTE 600 3000K HE	
2069513	OFFICELYTE 600 3000K HE EM	
2069514	OFFICELYTE 600 3000K HE DALI	
2069515	OFFICELYTE 600 3000K HE DALI EMPRO	
2069516	OFFICELYTE 600 3000K HE SSA03	
2069517	OFFICELYTE 600 3000K HE SSA01D	
2069500	OFFICELYTE 600 4000K HE	
2069501	OFFICELYTE 600 4000K HE EM	
2069502	OFFICELYTE 600 4000K HE DALI	
2069503	OFFICELYTE 600 4000K HE DALI EMPRO	
2069504	OFFICELYTE 600 4000K HE SSA03	
2069505	OFFICELYTE 600 4000K HE SSA01D	
2069507	OFFICELYTE 600 4000K HO EM	
2069508	OFFICELYTE 600 4000K HO DALI	
2069509	OFFICELYTE 600 4000K HO DALI EMPRO	
2069510	OFFICELYTE 600 4000K HO SSA03	
2069511	OFFICELYTE 600 4000K HO SSA01D	

Officelyte 600x600 model - CRI90		
2069528	OFFICELYTE 600 4000K C90 HE	
2069529	OFFICELYTE 600 4000K C90 HE EM	
2069530	OFFICELYTE 600 4000K C90 HE DALI	
2069531	OFFICELYTE 600 4000K C90 HE DALI EMPRO	
2069532	OFFICELYTE 600 4000K C90 HE SSA03	
2069533	OFFICELYTE 600 4000K C90 HE SSA01D	
2069534	OFFICELYTE 600 4000K C90 HO	
2069535	OFFICELYTE 600 4000K C90 HO EM	
2069536	OFFICELYTE 600 4000K C90 HO DALI	
2069537	OFFICELYTE 600 4000K C90 HO DALI EMPRO	

Officelyte 600x600 model - CRI90	
2069538	OFFICELYTE 600 4000K C90 HO SSA03
2069539	OFFICELYTE 600 4000K C90 HO SSA01D

Officelyte 1200x300 model - CRI80		
2069546	OFFICELYTE 1200 3000K HE DALI	
2069547	OFFICELYTE 1200 3000K HE DALI EMPRO	
2069548	OFFICELYTE 1200 3000K HE SSA03	
2069549	OFFICELYTE 1200 3000K HE SSA01D	
2069524	OFFICELYTE 1200 4000K HE DALI	
2069525	OFFICELYTE 1200 4000K HE DALI EMPRO	
2069526	OFFICELYTE 1200 4000K HE SSA03	
2069527	OFFICELYTE 1200 4000K HE SSA01D	

Officelyte 1200x300 model - CRI90		
2069552	OFFICELYTE 1200 4000K C90 HE DALI	
2069553	OFFICELYTE 1200 4000K C90 HE DALI EMPRO	
2069554	OFFICELYTE 1200 4000K C90 HE SSA03	
2069555	OFFICELYTE 1200 4000K C90 HE SSA01D	

Accessories	
2069556	OFFICELYTE PB KIT
2069557	OFFICELYTE T-BAR KIT

Dimmable


SylSmart Connected
SylSmart Standalone

Optix Recessed

Concord




Complete range of high-performance, very low luminance recessed luminaires, designed to provide both high efficiency and excellent visual comfort. Low glare optics with optimised diffusers and reflectors. Aluminised finish (UGR<16). Extremely low luminance (<200 cd/m² at 65°) in aluminised version, ideal for prolonged screen work and limiting eye strain in accordance with EN12 464-1. Photobiological risk group: GR0 or GR1. Luminaire can be covered with glass wool or acoustic insulation. High efficiency (up to 147lm/W) to maximise financial return. Available in 3000K, 4000K and Tunable White. Lighting management: Traditional wired DALI / Bluetooth: SylSmart® Connected (SSA) with integrated sensor or SylSmart® Standalone (SSC) with optional remote detection. Optix LumiNature®: version equipped with an innovative LED that closely recreates the light spectrum of the sun, without blue peaks, and achieves exceptional colour rendering CRI>97. HCL (Human Centric Lighting) models equipped with SylSmart® lighting management add dynamic control to respect the natural circadian rhythm of the human body for maximum well-being and visual comfort. Standard Linect© connection can be tapped. Dimmable by standard wired switch (DALI) or wireless, battery-free piezoelectric switch (SylSmart®). Expected lifetime: 107,500 hrs (L80), except LumiNature™: 100,000 hrs (L70), 68,000 (L80). 5-years warranty.



600x600 Standard Output		
	2023590	OPTIX RECESSED 600x600 2L SO 3000K ALU
◬	2023591	OPTIX RECESSED 600x600 2L SO 3000K ALU DALI
	2023594	OPTIX RECESSED 600x600 2L SO 4000K ALU
◬	2023595	OPTIX RECESSED 600x600 2L SO 4000K ALU DALI
◬	2023917	OPTIX RECESSED 600 2L SO 4000K ALU SSA03
	2023597	OPTIX RECESSED 600x600 2L SO 4000K ALU EM
◬	2023596	OPTIX RECESSED 600x600 2L SO 4000K ALU DALI EM
	2023632	OPTIX RECESSED 600x600 3L SO 4000K ALU
◬	2023633	OPTIX RECESSED 600x600 3L SO 4000K ALU DALI


LumiNature		
	2023832	OPTIX RECESSED 600 2L LUMI 4K ALU
◬	2023833	OPTIX RECESSED 600 2L LUMI 4K ALU DALI
◬	2023834	OPTIX RECESSED 600 2L LUMI 4K ALU SSC
◬	2023941	OPTIX RECESSED 600 2L LUMI 4K ALU SSA03
◬	2023835	OPTIX RECESSED 600 2L LUMI HCL TW ALU DALI

600x600 Medium Output		
	2023570	OPTIX RECESSED 600x600 2L 3000K ALU
◬	2023571	OPTIX RECESSED 600x600 2L 3000K ALU DALI
	2023604	OPTIX RECESSED 600x600 3L 3000K ALU
◬	2023605	OPTIX RECESSED 600x600 3L 3000K ALU DALI
	2023574	OPTIX RECESSED 600x600 2L 4000K ALU
◬	2023575	OPTIX RECESSED 600x600 2L 4000K ALU DALI
◬	2023915	OPTIX RECESSED 600 2L 4000K ALU SSA03
	2023577	OPTIX RECESSED 600x600 2L 4000K ALU EM
◬	2023576	OPTIX RECESSED 600x600 2L 4000K ALU DALI EM
	2023608	OPTIX RECESSED 600x600 3L 4000K ALU
◬	2023609	OPTIX RECESSED 600x600 3L 4000K ALU DALI
◬	2023612	OPTIX RECESSED 600x600 3L 4000K ALU SSC
	2023611	OPTIX RECESSED 600x600 3L 4000K ALU EM
◬	2023610	OPTIX RECESSED 600x600 3L 4000K ALU DALI EM
	2023579	OPTIX RECESSED 600x600 2L 4000K C9 ALU
◬	2023580	OPTIX RECESSED 600x600 2L 4000K C9 ALU DALI
	2023581	OPTIX RECESSED 600x600 2L 4000K C9 ALU EM
◬	2023636	OPTIX RECESSED 600x600 3L TW ALU DALI

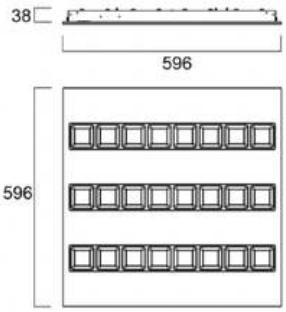

LumiNature		
	2023842	OPTIX RECESSED 600 3L LUMI 4K ALU
◬	2023843	OPTIX RECESSED 600 3L LUMI 4K ALU DALI
◬	2023844	OPTIX RECESSED 600 3L LUMI 4K ALU SSC
◬	2023943	OPTIX RECESSED 600 3L LUMI 4K ALU SSA03
◬	2023845	OPTIX RECESSED 600 3L LUMI HCL TW ALU DALI
◬	2023846	OPTIX RECESSED 600 3L LUMI HCL TW ALU SSC

600x600 High Output		
	2023618	OPTIX RECESSED 600x600 3L HO 3000K ALU
◬	2023619	OPTIX RECESSED 600x600 3L HO 3000K ALU DALI
	2023622	OPTIX RECESSED 600x600 3L HO 4000K ALU
◬	2023623	OPTIX RECESSED 600x600 3L HO 4000K ALU DALI
◬	2023920	OPTIX RECESSED 600 3L HO 4000K ALU SSA03
	2023625	OPTIX RECESSED 600x600 3L HO 4000K ALU EM
◬	2023624	OPTIX RECESSED 600x600 3L HO 4000K ALU DALI EM




LumiNature		
	2023876	OPTIX RECESSED 600 4L LUMI 4K ALU
◬	2023877	OPTIX RECESSED 600 4L LUMI 4K ALU DALI
◬	2023878	OPTIX RECESSED 600 4L LUMI 4K ALU SSC

◬ Dimmable

SylSmart Connected
SylSmart Standalone

LumiNature

2023948	OPTIX RECESSED 600 4L LUMI 4K ALU SSA03
2023879	OPTIX RECESSED 600 4L LUMI HCL TW ALU DALI
2023880	OPTIX RECESSED 600 4L LUMI HCL TW ALU SSC

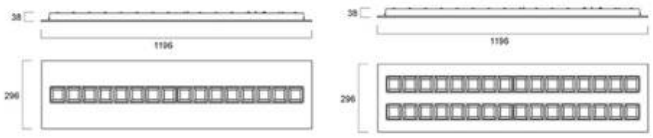

1200x300 Medium Output

2023654	OPTIX RECESSED 1200X300 1L 3000K ALU
2023655	OPTIX RECESSED 1200X300 1L 3000K ALU DALI
2023660	OPTIX RECESSED 1200x300 2L 3000K ALU
2023661	OPTIX RECESSED 1200x300 2L 3000K ALU DALI
2023656	OPTIX RECESSED 1200X300 1L 4000K ALU
2023657	OPTIX RECESSED 1200X300 1L 4000K ALU DALI
2023659	OPTIX RECESSED 1200X300 1L 4000K ALU EM
2023658	OPTIX RECESSED 1200X300 1L 4000K ALU DALI EM
2023664	OPTIX RECESSED 1200x300 2L 4000K ALU
2023665	OPTIX RECESSED 1200x300 2L 4000K ALU DALI
2023669	OPTIX RECESSED 1200x300 2L 4000K ALU SSC
2023924	OPTIX RECESSED 1200 2L 4000K ALU SSA03
2023667	OPTIX RECESSED 1200x300 2L 4000K ALU EM
2023666	OPTIX RECESSED 1200x300 2L 4000K ALU DALI EM
2023670	OPTIX RECESSED 1200x300 2L 4000K C9 ALU
2023671	OPTIX RECESSED 1200x300 2L 4000K C9 ALU DALI
2023672	OPTIX RECESSED 1200x300 2L 4000K C9 ALU EM
2023682	OPTIX RECESSED 1200x300 2L TW ALU DALI
2023683	OPTIX RECESSED 1200x300 2L TW ALU SSC01

LumiNature

2023837	OPTIX RECESSED 1200 2L LUMI 4K ALU
2023838	OPTIX RECESSED 1200 2L LUMI 4K ALU DALI
2023839	OPTIX RECESSED 1200 2L LUMI 4K ALU SSC
2023942	OPTIX RECESSED 1200 2L LUMI 4K ALU SSA03
2023840	OPTIX RECESSED 1200 2L LUMI HCL TW ALU DALI
2023841	OPTIX RECESSED 1200 2L LUMI HCL TW ALU SSC

Accessories


2021710	OPTIX R PULL UP KIT
2021711	OPTIX R SURFACE MOUNT KIT 600X600

Optix Recessed 4 Cells

Concord



Recessed LED luminaire designed to complement projects using other luminaires from the Optix range. Ideal for confined spaces such as small rooms or circulation areas. Luminous efficacy up to 119 lm/W. Aluminium version UGR <18, available in 3000K and 4000K. Wired lighting management: traditional DALI. RAL 9016. Expected lifetime: 96,000 hrs (L80). 5-year warranty.



Optix R 4 Cells

2021688	OPTIX RECESSED 4 CELLS 3000K ALU
2021689	OPTIX RECESSED 4 CELLS 3000K ALU DALI
2021692	OPTIX RECESSED 4 CELLS 4000K ALU
2021693	OPTIX RECESSED 4 CELLS 4000K ALU DALI

Dimmable


SylSmart Connected
SylSmart Standalone

Optix Recessed Asymmetric

Concord



Recessed LED architectural luminaire with asymmetrical optics, ideal for lighting school blackboards. CRI>80 - SDCM< 3. Available in warm white (3000K) or neutral white (4000K). Minimalist design, very discreet for perfect integration. Lighting management: Dimmable by push button (DALI version) / SylSmart® Standalone (SSC) with optional remote detection. Expected lifetime: 100,000 hrs (L80). 5-year warranty.



Optix R Asym	
2021682	OPTIX RECESSED 1200 ASYMMETRIC 3000K
2021683	OPTIX RECESSED 1200 ASYMMETRIC 3000K DALI
2021684	OPTIX RECESSED 1200 ASYMMETRIC 3000K SSC
2021685	OPTIX RECESSED 1200 ASYMMETRIC 4000K
2021686	OPTIX RECESSED 1200 ASYMMETRIC 4000K DALI
2021687	OPTIX RECESSED 1200 ASYMMETRIC 4000K SSC


Rana Neo Recessed

SYLVANIA

PRO




LED recessed luminaire for high visual comfort in commercial applications. Single or double row optics made of satin-finished aluminium with low luminance (L < 600cd/m² at 65°) and UGR < 19 in accordance with the recommendations of standard EN 12 464-1. Energy efficiency up up to 125lm/W. Light management: - wired: traditional DALI - Bluetooth: SylSmart Connected (SSA) with integrated sensor or SylSmart Standalone (SSC) with optional remote detection. Dimmable via wired DALI signal or wireless, battery-free piezo button (SylSmart models). Luminaire can be covered with insulating material. Equipped with a terminal strip for easy wiring. ENEC-certified driver. Lifespan: 96,000 hours (L80B20). 5-year warranty.



600x600 3000K	
0052576	RANA NEO 3300LM REC 600x600 830 CC 2L WHITE
0052578	RANA NEO 3300LM REC 600x600 830 DALI 2L WHITE
0052580	RANA NEO 3300LM REC 600x600 830 SSC 2L WHITE
0044674	RANA NEO 3300LM REC 600X600 830 SSA03 2L WHITE
0052582	RANA NEO 3300LM REC 600x600 830 CC EM 2L WHITE
0052584	RANA NEO 3300LM REC 600x600 830 DALI EM 2L WHITE
0052586	RANA NEO 3300LM REC 600x600 830 SSC EM 2L WHITE

600x600 4000K	
0052577	RANA NEO 3500LM REC 600x600 840 CC 2L WHITE
0052579	RANA NEO 3500LM REC 600x600 840 DALI 2L WHITE
0052581	RANA NEO 3500LM REC 600x600 840 SSC 2L WHITE
0044675	RANA NEO 3500LM REC 600X600 840 SSA03 2L WHITE
0052583	RANA NEO 3500LM REC 600x600 840 CC EM 2L WHITE
0052585	RANA NEO 3500LM REC 600x600 840 DALI EM 2L WHITE
0052587	RANA NEO 3500LM REC 600x600 840 SSC EM 2L WHITE

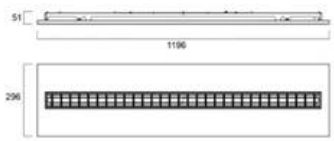

1200x300 3000K	
0052588	RANA NEO 3500LM REC 1200x300 830 CC 1L WHITE
0052590	RANA NEO 3500LM REC 1200x300 830 DALI 1L WHITE
0052592	RANA NEO 3500LM REC 1200x300 830 SSC 1L WHITE
0044677	RANA NEO 3500LM REC 1200X300 830 SSA03 1L WHITE

Dimmable

SylSmart Connected
SylSmart Standalone

1200x300 3000K	
0052594	RANA NEO 3500LM REC 1200x300 830 CC EM 1L WHITE
0052596	RANA NEO 3500LM REC 1200x300 830 DALI EM 1L WHITE
0052598	RANA NEO 3500LM REC 1200x300 830 SSC EM 1L WHITE

1200x300 4000K	
0052589	RANA NEO 3700LM REC 1200x300 840 CC 1L WHITE
0052591	RANA NEO 3700LM REC 1200x300 840 DALI 1L WHITE
0052593	RANA NEO 3700LM REC 1200x300 840 SSC 1L WHITE
0044678	RANA NEO 3700LM REC 1200X300 840 SSA03 1L WHITE
0052595	RANA NEO 3700LM REC 1200x300 840 CC EM 1L WHITE
0052597	RANA NEO 3700LM REC 1200x300 840 DALI EM 1L WHITE
0052599	RANA NEO 3700LM REC 1200x300 840 SSC EM 1L WHITE


Rana Helios

SYLVANIA

PRO



Eco-friendly recessed luminaire for easy maintenance in commercial applications. Designed to be fitted with HELIOS T5 LED tubes, to be ordered separately. High luminous efficacy up to 145 lm/W, UGR<19. Luminous flux: 3100 lm in 2-tube version, 4500 lm in 3-tube version (measured with HELIOS T5 IRC85, 4000K tubes). Dimmable by standard wired switch (DALI versions). Lighting fixture can be covered with glass wool or acoustic insulation. Equipped with a terminal block for easy connection. Expected service life: 50,000 hrs (L80). 5-year warranty.



600x600	
0044994	RANA HELIOS R 600 2L LOUV+PRI
0044990	RANA HELIOS R 600 2L LOUV+PRI DALI
0044995	RANA HELIOS R 600 3L LOUV+PRI
0044991	RANA HELIOS R 600 3L LOUV+PRI DALI

Dimmable


SylSmart Connected
SylSmart Standalone


OptiClip

SYLVANIA

PRO

Eco-responsible recessed luminaire for easy maintenance and visual comfort in commercial applications. Replaceable LED modules: easy maintenance thanks to module clip system and simple Plug and Play connection. Fully customisable luminaire with a sleek design. High luminous efficacy: up to 142lm/W. 600x600 mm versions: UGR <16 and luminance <600 cd/m² at 65°(compliant with EN 12 464-1 for work on computer workstations).
Lighting management:
- wired: traditional DALI
- Bluetooth: SylSmart Connected (SSA03) with integrated sensor or Bluetooth driver (SSA01D)
- Dimmable via standard wired switch (DALI versions) or wireless, battery-free piezo switch (SylSmart versions).
Multipower version. Fitted with a terminal block for easy wiring (LiLo). Photobiological risk group: GR1. Lifespan: 87.000 hrs (L80). 5-year warranty.





OptiClip 600x600	
0034000	OPTICLIP R 600 830 2L WHT MP
0034001	OPTICLIP R 600 830 2L WHT DALI
0034002	OPTICLIP R 600 830 2L WHT SSC
0034003	OPTICLIP R 600 830 2L WHT SSA03
0034004	OPTICLIP R 600 830 2L WHT SSA01D
0034005	OPTICLIP R 600 840 2L WHT MP
0034006	OPTICLIP R 600 840 2L WHT DALI
0034007	OPTICLIP R 600 840 2L WHT SSC
0034008	OPTICLIP R 600 840 2L WHT SSA03
0034009	OPTICLIP R 600 840 2L WHT SSA01D

OptiClip 600x600 - CRI90	
0034010	OPTICLIP R 600 940 2L WHT MP
0034011	OPTICLIP R 600 940 2L WHT DALI
0034012	OPTICLIP R 600 940 2L WHT SSC
0034013	OPTICLIP R 600 940 2L WHT SSA03
0034014	OPTICLIP R 600 940 2L WHT SSA01D

OptiClip 1200x300	
0034015	OPTICLIP R 1200 830 1L WHT MP
0034016	OPTICLIP R 1200 830 1L WHT DALI
0034017	OPTICLIP R 1200 830 1L WHT SSC
0034018	OPTICLIP R 1200 830 1L WHT SSA03
0034019	OPTICLIP R 1200 830 1L WHT SSA01D
0034020	OPTICLIP R 1200 840 1L WHT MP
0034021	OPTICLIP R 1200 840 1L WHT DALI
0034022	OPTICLIP R 1200 840 1L WHT SSC
0034023	OPTICLIP R 1200 840 1L WHT SSA03
0034024	OPTICLIP R 1200 840 1L WHT SSA01D

OptiClip 1200x300 - CRI90	
0034025	OPTICLIP R 1200 940 1L WHT MP
0034026	OPTICLIP R 1200 940 1L WHT DALI
0034027	OPTICLIP R 1200 940 1L WHT SSC
0034028	OPTICLIP R 1200 940 1L WHT SSA03
0034029	OPTICLIP R 1200 940 1L WHT SSA01D

OptiClip Black 600x600	
0034040	OPTICLIP R 600 830 2L BLK MP
0034041	OPTICLIP R 600 830 2L BLK DALI
0034042	OPTICLIP R 600 830 2L BLK SSA03
0034043	OPTICLIP R 600 830 2L BLK SSA01D
0034044	OPTICLIP R 600 840 2L BLK MP
0034045	OPTICLIP R 600 840 2L BLK DALI
0034046	OPTICLIP R 600 840 2L BLK SSA03
0034047	OPTICLIP R 600 840 2L BLK SSA01D

LED Engines	
0034048	OPTICLIP LIGHT E 830 WH
0034049	OPTICLIP LIGHT E 840 WH
0034050	OPTICLIP LIGHT E 940 WH
0034051	OPTICLIP LIGHT E 830 BK
0034052	OPTICLIP LIGHT E 840 BK
0034053	OPTICLIP LIGHT E 940 BK

Drivers	
0034055	LIFUD LF-GIF038YH0900H(FK01) + CABLE
0034056	CUPOWER ID CCCI 40/230/300-1050 DALI DIP + CABLE
0034057	OSRAM OTI DX 35/220…240/1A0 NFC + CABLE
0034058	OSRAM OT WI 40/220-240/1A0 NFC BL LPI + CABLE
0034059	TRIDONIC LC 45W 500–1400MA BDW SC PRE2 + CABLE

Accessories	
0034054	OPTICLIP PLASTERBOARD KIT 4PCS
0047547	START PANEL SUSPENSION KIT SINGLE FIX
0047197	Surface Mounting Kit PRO 600x600x70mm
0047198	Surface Mounting Kit PRO 1200x300x70mm
0062317	Plasterboard Frame 600x600
0062319	Plasterboard Frame 1200x300

Dimmable

SylSmart Connected
SylSmart Standalone

SYLVANIA





New

OptiClip TERRA™

THE FIRST PAPER THAT ILLUMINATES YOUR SPACE



MADE IN FRANCE

sylvania-group.com

Digital | Lighting | Solutions


OptiClip TERRA™

SYLVANIA

TERRA

SylSmart

The first paper that lights up your space. A luminaire made from 60% paper. Replaceable LED modules: easy maintenance thanks to the clip-on module system and simple Plug & Play connection. High efficiency up to 142lm/W. UGR<16, SDCM<3. Lighting management: traditional wired DALI / Bluetooth: SylSmart® Connected (SSA) with sensor or integrated drivers / Dimmable via a standard wired switch (DALI versions) or a wireless, battery-free piezo switch (SylSmart® versions). Equipped with a LiLo connector for quick installation. Lifespan: 87,000 hrs (L80). 5-year warranty.



	OptiClip TERRA 600x600	
	0042024	OPTICLIP TERRA 600 830 2L WHT MP
◬	0042025	OPTICLIP TERRA 600 830 2L WHT DALI
◬	**0042026**	OPTICLIP TERRA 600 830 2L WHT SSA03
◬	**0042028**	OPTICLIP TERRA 600 830 2L WHT SSA01D
	0042021	OPTICLIP TERRA 600 840 2L WHT MP
◬	0042022	OPTICLIP TERRA 600 840 2L WHT DALI
◬	**0042023**	OPTICLIP TERRA 600 840 2L WHT SSA03
◬	**0042027**	OPTICLIP TERRA 600 840 2L WHT SSA01D

Quadro


SYLVANIA

PRO

SylSmart



Recessed architectural light panel with variable power to cover all lighting needs in a single product. Eight adjustable light outputs and power levels at the driver with excellent visual comfort. Complies with the requirements of standard EN12464-1 on lighting for computer workstations with a luminance of L<1000 cd/m² at 65°. High luminous efficacy up to 153 lm/W (2250 lm version), SDCM < 3. Quick-connect system (LiLo). DALI dimmable, push-dim and SylSmart® Connected enabled. Photobiological risk group: GR1. Expected lifetime: 88,000 hrs (L80). 5-year warranty.

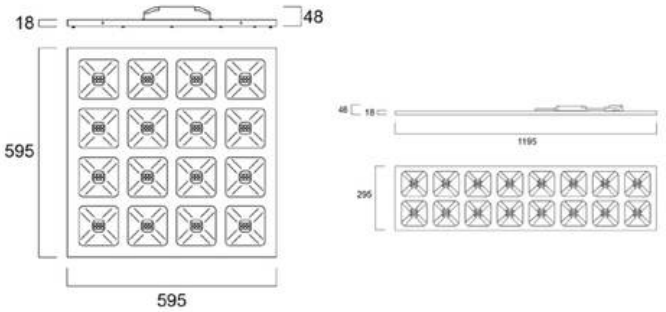

	Quadro 600x600	
	0044700	QUADRO 600x600 830 MP
	0044701	QUADRO 600x600 840 MP
◬	0044702	QUADRO 600x600 830 DALI
◬	0044703	QUADRO 600x600 840 DALI
◬	**0044712**	QUADRO 600x600 830 SSA03
◬	**0044713**	QUADRO 600x600 840 SSA03
◬	**0044719**	QUADRO 600x600 840 SSA01D

	Quadro 1200x300	
	0044709	QUADRO 1200x300 840 MP
◬	0044711	QUADRO 1200x300 840 DALI
◬	**0044716**	QUADRO 1200x300 830 SSA03
◬	**0044717**	QUADRO 1200x300 840 SSA03
◬	**0044722**	QUADRO 1200x300 830 SSA01D
◬	**0044723**	QUADRO 1200x300 840 SSA01D

Accessories	
0047197	Surface Mounting Kit PRO 600x600x70mm
0047198	Surface Mounting Kit PRO 1200x300x70mm
0062317	Plasterboard Frame 600x600
0062319	Plasterboard Frame 1200x300
0047547	START PANEL SUSPENSION KIT SINGLE FIX
2994891	600X600 STARTLED SUS FRAME STE WHT

◬ Dimmable

SylSmart Connected
SylSmart Standalone

SYLVANIA



NEW

Quantum

A highly efficient classic

- High efficacy up to 182lm/W
- High visual comfort UGR<19
- SylSmart® Connected enabled

sylvania-group.com

Digital | Lighting | Solutions

Quantum


SYLVANIA

NEW PRO




LED panel with Backlit technology. High efficacy of up to 182lm/W. Suitable for premises requiring a high level of IP protection: hospitals, laboratories, professional kitchens, etc.. UGR<19, SDCM<3. Multipower functionality where the luminous flux of the luminaire can be tailored to local needs during installation by only setting a quick selector switch. Dimmable via standard wired switch (DALI models) and SylSmart® Connected enabled. Integrated Loop-in-Loop-out (LILO) function. Safety cable supplied as standard. Photobiological risk group: GR0. Lifespan: 100.000 hrs (L80).


5-year warranty.



Quantum 600x600	
0048108	Quantum 600X600 2200-4400lm 830 MP
0048106	Quantum 600X600 2300-4700lm 840 MP
0048109	Quantum 600X600 4400lm 830 DALI
0048107	Quantum 600X600 4700lm 840 DALI
0048115	QUANTUM 600X600 4400LM 830 SSA01D
0048113	QUANTUM 600X600 4700LM 840 SSA01D
0048114	QUANTUM 600X600 4400LM 830 SSA03
0048112	QUANTUM 600X600 4700LM 840 SSA03
0048110	Quantum 600X600 2200-4300lm 940 MP
0048111	Quantum 600X600 4300lm 940 DALI



Quantum 1200x300	
0048118	Quantum 1200X300 2200-4300lm 830 MP
0048116	Quantum 1200X300 2300-4500lm 840 MP
0048119	Quantum 1200X300 4300lm 830 DALI
0048117	Quantum 1200X300 4500lm 840 DALI
0048121	QUANTUM 1200X300 4300LM 830 SSA01D
0048137	QUANTUM 1200X300 4500LM 840 SSA01D
0048120	QUANTUM 1200X300 4300LM 830 SSA03
0048136	QUANTUM 1200X300 4500LM 840 SSA03



Quantum 1200x600	
0048130	Quantum 1200X600 4500-5500lm 830 MP
0048128	Quantum 1200X600 4800-5800lm 840 MP
0048129	Quantum 1200X600 5800lm 840 DALI

Accessories		
0047197	Surface Mounting Kit PRO 600x600x70mm	
0047198	Surface Mounting Kit PRO 1200x300x70mm	
0062317	Plasterboard Frame 600x600	
0062319	Plasterboard Frame 1200x300	
0047547	START PANEL SUSPENSION KIT SINGLE FIX	
0047545	Pull-up ceiling bracket	
0048138	Mounting Clips 4PCS	
9146602	LSF EM PACK MT 6-54V LIFEPO4 3H3W RC	
9146603	LSF EM PACK DAST 6-54V LIFEPO4 3H3W RC	

Dimmable

SylSmart Connected
SylSmart Standalone

Panel IP66 Cleanroom

SYLVANIA

LiteGuard



Recessed LED luminaire for cleanrooms in hospitals (operating rooms, intensive care units, etc.), laboratories, or industrial environments (microelectronics, food industry, etc.). Certified for use in cleanrooms, class 2–9 according to ISO 14644-1:2015. Screwless design for easy cleaning. The rounded frame edges prevent the accumulation of particles and bacteria. Optical choice sbetween matt tempered safety glass (MSG) and clear tempered safety glass + micro-prismatic plexiglass (CMPG). High efficiency up to 145 lm/W. UGR < 19, CRI 90, and 4000K color temperature. DALI versions dimmable via standard wired switch. Bottom-mounting system, pull-up kit suitable for different ceiling types. Operating range: -20°C to +60°C. Lifetime: 70,000 hours (L80). 5-year warranty.

Matt tempered safety glass 598x598 CRI80	
0042760	PANEL IP66 CR R 598S MSG L3 5360LM 840
0042764	PANEL IP66 CR R 598S MSG L3 5360LM 840 DALI
0042776	PANEL IP66 CR R 598S MSG L3 5360LM 840 DALI EM

Matt tempered safety glass 1198x298 CRI80	
0042762	PANEL IP66 CR R 598R MSG L3 4990LM 840
0042766	PANEL IP66 CR R 598R MSG L3 4990LM 840 DALI
0042777	PANEL IP66 CR R 598R MSG L3 4990LM 840 DALI EM

Matt tempered safety glass 623x623 CRI80	
0042761	PANEL IP66 CR R 623S MSG L3 5360LM 840
0042765	PANEL IP66 CR R 623S MSG L3 5360LM 840 DALI

Matt tempered safety glass 1247x312 CRI80	
0042763	PANEL IP66 CR R 623R MSG L3 4990LM 840
0042767	PANEL IP66 CR R 623R MSG L3 4990LM 840 DALI

Clear tempered safety glass + micro-prismatic plexiglass 598x598 CRI80	
0042768	PANEL IP66 CR R 598S CMPG L3 4670LM 840
0042772	PANEL IP66 CR R 598S CMPG L3 4670LM 840 DALI
0042778	PANEL IP66 CR R 598S CMPG L3 4670LM 840 DALI EM

Clear tempered safety glass + micro-prismatic plexiglass 1198x298 CRI80	
0042770	PANEL IP66 CR R 598R CMPG L3 4290LM 840
0042774	PANEL IP66 CR R 598R CMPG L3 4290LM 840 DALI
0042779	PANEL IP66 CR R 598R CMPG L3 4290LM 840 DALI EM

Clear tempered safety glass + micro-prismatic plexiglass 623x623 CRI80	
0042769	PANEL IP66 CR R 623S CMPG L3 4670LM 840
0042773	PANEL IP66 CR R 623S CMPG L3 4670LM 840 DALI

Clear tempered safety glass + micro-prismatic plexiglass 1247x312 CRI80	
0042771	PANEL IP66 CR R 623R CMPG L3 4290LM 840
0042775	PANEL IP66 CR R 623R CMPG L3 4290LM 840 DALI

Clear tempered safety glass + micro-prismatic plexiglass 598x598 CRI90	
0042010	PANEL IP66 CR R 598S CMPG L3 4000LM 940
0042014	PANEL IP66 CR R 598S CMPG L3 4000LM 940 DALI
0042018	PANEL IP66 CR R 598S CMPG L3 4000LM 940 DALI EM

Clear tempered safety glass + micro-prismatic plexiglass 1198x298 CRI90	
0042012	PANEL IP66 CR R 598R CMPG L3 3750LM 940
0042016	PANEL IP66 CR R 598R CMPG L3 3750LM 940 DALI
0042019	PANEL IP66 CR R 598R CMPG L3 3750LM 940 DALI EM

Clear tempered safety glass + micro-prismatic plexiglass 623x623 CRI90	
0042011	PANEL IP66 CR R 623S CMPG L3 4000LM 940
0042015	PANEL IP66 CR R 623S CMPG L3 4000LM 940 DALI

Clear tempered safety glass + micro-prismatic plexiglass 1247x312 CRI90	
0042013	PANEL IP66 CR R 623R CMPG L3 3750LM 940
0042017	PANEL IP66 CR R 623R CMPG L3 3750LM 940 DALI

Accessory	
0042020	PANEL IP66 C R SAFETY CABLE

Dimmable


SylSmart Connected
SylSmart Standalone

Panel IP65 Cleanroom


SYLVANIA

LiteGuard

UGR19 LED panel with prismatic diffuser. Suitable for premises requiring a high level of IP protection: hospitals, laboratories, professional kitchens, etc. Certified for use in clean rooms, class 3-9 according to ISO 14644-1: 2015. Resistant to hydrogen peroxide-based cleaners (aqueous H2O2 solutions) and chlorinated alkalis. Efficiency up to 122lm/W. ON/OFF or DALI versions (not DALI-push compatible). Safety cables supplied as standard. Photobiological risk group: GR0. Lifetime: 83,000 hours (L80). 5-year warranty.



Panel IP65 CR 600x600	
0042782	Panel IP65 CR UGR19 600x600 4400lm 840 WH
0042783	Panel IP65 CR UGR19 600x600 4400lm 940 WH
0042784	Panel IP65 CR UGR19 600x600 4400lm 840 DALI WH
0042785	Panel IP65 CR UGR19 600x600 4400lm 940 DALI WH



Panel IP65 CR 1200x300	
0042786	Panel IP65 CR UGR19 1200x300 4300lm 840 WH

Accessories	
0062317	Plasterboard Frame 600x600
0062319	Plasterboard Frame 1200x300
0047197	Surface Mounting Kit PRO 600x600x70mm
0047198	Surface Mounting Kit PRO 1200x300x70mm
0047547	START PANEL SUSPENSION KIT SINGLE FIX
0047472	IP68 LILO JUNCTION BOX 3P 5P


START Panel

SYLVANIA

START



LED backlit panel, ideal for lighting high-traffic areas, corridors and office or commercial spaces. High efficacy up to 150lm/W. High visual comfort: UGR <19, SDCM <3. Multipower functionality where the luminous flux of the luminaire can be tailored to local needs during installation by only setting a quick selector switch. Dual-tone switch (3000K/4000K). Dimmable via standard wired switch (DALI models) and SylSmart® Connected enabled. Integrated Loop-in-Loop-out (LILO) function. Safety cable supplied as standard. Photobiological risk group: GR0. Lifespan: 100.000 hrs (L80). 5-year warranty.

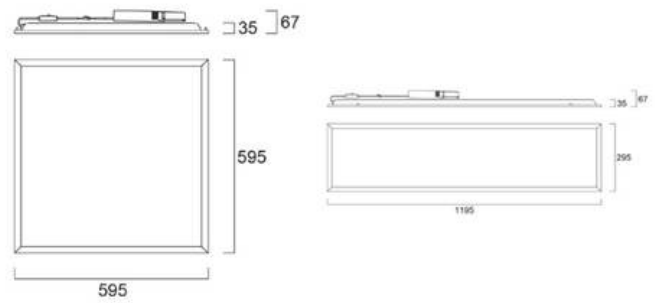

START Panel 600x600	
0048093	START Panel 600x600 3000-4700lm 830/840 MP
0048094	START Panel 600x600 4700lm 830/840 DALI

START Panel UGR19 600x600	
0048091	START Panel UGR19 600x600 3000-4700lm 830/840 MP
0048092	START Panel UGR19 600x600 4700lm 830/840 DALI
0048095	START Panel UGR19 600x600 3400-4500lm 830/840 PIR
0048097	START Panel UGR19 600x600 4700lm 830/840 SSA01D
0048096	START Panel UGR19 600x600 4500lm 830/840 SSA04

START Panel UGR19 1200x300	
0048098	START Panel UGR19 1200x300 2900-4600lm 830/840 MP
0048099	START Panel UGR19 1200x300 4600lm 830/840 DALI
0048101	START Panel UGR19 1200x300 4600lm 830/840 SSA01D
0048100	START Panel UGR19 1200x300 4400lm 830/840 SSA04

Accessories	
0010475	PIR Sensor Remote control
0047197	Surface Mounting Kit PRO 600x600x70mm
0047198	Surface Mounting Kit PRO 1200x300x70mm
0062317	Plasterboard Frame 600x600
0062319	Plasterboard Frame 1200x300
0047547	START PANEL SUSPENSION KIT SINGLE FIX
0048138	Mounting Clips 4PCS
0047545	Pull-up ceiling bracket
9146602	LSF EM PACK MT 6-54V LIFEPO4 3H3W RC
9146603	LSF EM PACK DAST 6-54V LIFEPO4 3H3W RC

Dimmable

SylSmart Connected
SylSmart Standalone


START eco Panel

SYLVANIA

START eco



600x600mm module to meet the most common installation need. Microprismatic diffuser for low glare and low UGR19 value or Opal diffuser to achieve a wide beam and provides an even and diffused lighting. Slim size 35mm maximum (with driver 60mm). Available in Warm White (3000K), Neutral White (4000K) and Cool White (6500K). An economic version with efficacy up to 120lm/W. Delivers up to 4200 lm. Meets IP40 degree of protection from the front and IK02 degree of impact resistance. SDCM<5. Lifespan: 100.000 hours (L70).



600x600 UGR22	
0048087	START eco Panel 600x600 4000lm 830
0048088	START eco Panel 600x600 4200lm 840
0048089	START eco Panel 600x600 4200lm 865

600x600 UGR19	
0048086	START eco Panel UGR19 600x600 4000lm 840

Accessories	
0047197	Surface Mounting Kit PRO 600x600x70mm
0062317	Plasterboard Frame 600x600

Dimmable


SylSmart Connected
SylSmart Standalone

Optix Surface

Concord



Very low luminance LED ceiling light offering excellent visual comfort. Satin aluminum finish (UGR <16 and luminance <200 cd/m² at 65°, compliant with computer workstations according to EN 12 464-1) and versions with micro-prismatic diffuser (UGR<19). Available in direct or direct/indirect (70/30%) lighting versions for suspended installations. Luminous flux up to 7000 lm - luminous efficacy up to 164 lm/W. CRI>80 or >90 - SDCM: 3. Available in 3000K and 4000K. Lighting management: Traditional wired DALI / Bluetooth: SylSmart® Connected (SSA) with integrated cell or SylSmart® Standalone (SSC) with optional remote detection. Optix LumiNature®: version equipped with an innovative LED that closely recreates the light spectrum of the sun, without blue peaks, and achieves exceptional color rendering CRI>97. HCL (Human Centric Lighting) models equipped with SylSmart® lighting management offer dynamic control that respects the natural circadian rhythm of the human body for maximum well-being and visual comfort. Lifespan: 120,000 hours (L80), LumiNature®: 68,000 hours (L80) for LUMI HCL versions and 60,000 hours (L80) for LUMI versions. 5-year warranty.



1200x200 Medium Output Direct		
2023700	OPTIX SURFACE 1200x200 2 LINE 3000K ALU	
2023701	OPTIX SURFACE 1200x200 2 LINE 3000K ALU DALI	
2023704	OPTIX SURFACE 1200x200 2 LINE 4000K ALU	
2023705	OPTIX SURFACE 1200x200 2 LINE 4000K ALU DALI	
2023709	OPTIX SURFACE 1200x200 2 LINE 4000K ALU SSC	
2023928	OPTIX SURFACE 1200 2L 4000K ALU SSA03	
2023707	OPTIX SURFACE 1200x200 2 LINE 4000K ALU EM	
2023706	OPTIX SURFACE 1200x200 2 LINE 4000K ALU DALI EM	
2023710	OPTIX SURFACE 1200x200 2 LINE 4000K C9 ALU DALI	
2023711	OPTIX SURFACE 1200x200 2 LINE 4000K C9 ALU DALI EM	

1200x200 Medium Output Direct TW		
2023764	OPTIX SURFACE 1200x200 2 LINE TW ALU DALI	
2023766	OPTIX SURFACE 1200x200 2 LINE TW ALU SSC	
2023765	OPTIX SURFACE 1200x200 2 LINE TW ALU DALI EM	
2023767	OPTIX SURFACE 1200x200 2 LINE TW ALU SSC EM	

LumiNature		
2023827	OPTIX SURFACE 1200 2L LUMI 4K ALU	
2023828	OPTIX SURFACE 1200 2L LUMI 4K ALU DALI	
2023829	OPTIX SURFACE 1200 2L LUMI 4K ALU SSC	
2023940	OPTIX SURFACE 1200 2L LUMI 4K ALU SSA03	
2023830	OPTIX SURFACE 1200 2L LUMI HCL TW ALU DALI	
2023831	OPTIX SURFACE 1200 2L LUMI HCL TW ALU SSC	

1200x200 Medium Output Direct/Indirect		
2023720	OPTIX SURFACE 1200x200 2 LINE D/I 3000K ALU	
2023721	OPTIX SURFACE 1200x200 2 LINE D/I 3000K ALU DALI	
2023724	OPTIX SURFACE 1200x200 2 LINE D/I 4000K ALU	
2023725	OPTIX SURFACE 1200x200 2 LINE D/I 4000K ALU DALI	
2023729	OPTIX SURFACE 1200x200 2 LINE D/I 4000K ALU SSC	
2023931	OPTIX SURFACE 1200 2L D/I 4000K ALU SSA03	
2023727	OPTIX SURFACE 1200x200 2 LINE D/I 4000K ALU EM	
2023726	OPTIX SURFACE 1200x200 2 LINE D/I 4000K ALU DALI EM	
2023730	OPTIX SURFACE 1200x200 2 LINE D/I 4000K C9 ALU DALI	
2023731	OPTIX SURFACE 1200x200 2 LINE D/I 4000K C9 ALU DALI	

1200x200 Medium Output Direct/Indirect TW		
2023756	OPTIX SURFACE 1200x200 2 LINE D/I TW ALU DALI	
2023758	OPTIX SURFACE 1200x200 2 LINE D/I TW ALU SSC	
2023757	OPTIX SURFACE 1200x200 2 LINE D/I TW ALU DALI EM	
2023759	OPTIX SURFACE 1200x200 2 LINE D/I TW ALU SSC EM	

1200x200 High Output Direct/Indirect		
2023740	OPTIX SURFACE 1200x200 2 LINE D/I HO 3000K ALU	
2023741	OPTIX SURFACE 1200x200 2 LINE D/I HO 3000K ALU DALI	
2023744	OPTIX SURFACE 1200x200 2 LINE D/I HO 4000K ALU	
2023745	OPTIX SURFACE 1200x200 2 LINE D/I HO 4000K ALU DALI	
2023749	OPTIX SURFACE 1200x200 2 LINE D/I HO 4000K ALU SSC	
2023933	OPTIX SURFACE 1200 2L D/I HO 4000K ALU SSA03	
2023747	OPTIX SURFACE 1200x200 2 LINE D/I HO 4000K ALU EM	
2023746	OPTIX SURFACE 1200x200 2 LINE D/I HO 4000K ALU DALI	

1500x200 Medium Output Direct/Indirect		
2023772	OPTIX SURFACE 1500x200 2 LINE D/I HO 4000K ALU DALI	
2023776	OPTIX SURFACE 1500x200 2 LINE D/I HO 4000K ALU SSC	
2023935	OPTIX SURFACE 1500 2L D/I HO 4000K ALU SSA03	
2023774	OPTIX SURFACE 1500x200 2 LINE D/I HO 4000K ALU EM	
2023773	OPTIX SURFACE 1500x200 2 LINE D/I HO 4000K ALU DALI	

Accessories	
2021712	OPTIX S PLASTIC JOINING KIT
5054686	UNIVERSAL SUSPENSION KIT 1.5M
2021713	OPTIX S INFILL 600MM
2021714	OPTIX S INFILL 900MM
2021715	OPTIX S INFILL 1200MM
2021716	OPTIX S INFILL 1500MM
0044100	WALL BRACKETS
5050568	RANA ACC FULL SUSP + POWER 3CORE SET 1W
5050571	RANA ACC FULL SUSP + POWER 5CORE SET 2W
5050574	RANA ACC FULL SUSP + POWER 3CORE SET 1T
5050577	RANA ACC FULL SUSP + POWER 5CORE SET 2T
5050604	RANA ACC CEILING ROSE
2021721	OPTIX LIN ACCESSORY THR WRE 3X1,5 1200MM
2021722	OPTIX LIN ACCESSORY THR WRE 4X1,5 1200MM
2021723	OPTIX LIN ACCESSORY THR WRE 3X1,5+2X0,5 1200MM
2021724	OPTIX LIN ACCESSORY THR WRE 2X0,5+2X0,5 1200MM
2021727	OPTIX LIN ACCESSORY THR WRE 3X1,5 1500MM
2021728	OPTIX LIN ACCESSORY THR WRE 4X1,5 1500MM
2021729	OPTIX LIN ACCESSORY THR WRE 3X1,5+2X0,5 1500MM
2021730	OPTIX LIN ACCESSORY THR WRE 2X0,5+2X0,5 1500MM
2095228	OPTIX S INFILL 1200MM
2095231	OPTIX S INFILL 1200MM

Dimmable

SylSmart Connected
SylSmart Standalone


Optix Surface MPO

Concord




Very low luminance LED ceiling light offering excellent visual comfort. Micro-prismatic diffuser (UGR<19). Direct or direct/indirect (70/30%) versions available. Luminous flux up to 4350 lm (direct version) and up to 6650 lm (direct/indirect version). Luminous efficacy up to 124lm/W (direct version) and 136lm/W (direct/indirect version). Lighting management: traditional wired DALI / Bluetooth: SylSmart® Connected (SSA) with integrated sensor or SylSmart® Standalone (SSC) with optional remote detection. Dimmable via a standard wired switch (DALI models) or a wireless, battery-free piezoelectric switch (SylSmart® models). Expected lifetime: 130,000 hrs (L80). 5-year warranty.

Accessories	
2021712	OPTIX S PLASTIC JOINING KIT
5054686	UNIVERSAL SUSPENSION KIT 1.5M
2021713	OPTIX S INFILL 600MM
2021714	OPTIX S INFILL 900MM
2021715	OPTIX S INFILL 1200MM
2021716	OPTIX S INFILL 1500MM
5050568	RANA ACC FULL SUSP + POWER 3CORE SET 1W
5050571	RANA ACC FULL SUSP + POWER 5CORE SET 2W
5050574	RANA ACC FULL SUSP + POWER 3CORE SET 1T
5050577	RANA ACC FULL SUSP + POWER 5CORE SET 2T
5050604	RANA ACC CEILING ROSE
2021721	OPTIX LIN ACCESSORY THR WRE 3X1,5 1200MM
2021722	OPTIX LIN ACCESSORY THR WRE 4X1,5 1200MM
2021723	OPTIX LIN ACCESSORY THR WRE 3X1,5+2X0,5 1200MM
2021724	OPTIX LIN ACCESSORY THR WRE 2X0,5+2X0,5 1200MM
2021727	OPTIX LIN ACCESSORY THR WRE 3X1,5 1500MM
2021728	OPTIX LIN ACCESSORY THR WRE 4X1,5 1500MM
2021729	OPTIX LIN ACCESSORY THR WRE 3X1,5+2X0,5 1500MM
2021730	OPTIX LIN ACCESSORY THR WRE 2X0,5+2X0,5 1500MM



1200x200 Direct		
2021672	OPTIX SURFACE 1200 MPO D 4000K	
2021674	OPTIX SURFACE 1200 MPO D 4000K DALI	
2021664	OPTIX SURFACE 1200 MPO D HO 4000K	
2021666	OPTIX SURFACE 1200 MPO D HO 4000K DALI	
2021667	OPTIX SURFACE 1200 MPO D HO 4000K DALI EM	



1500x200 Direct		
2021702	OPTIX SURFACE 1500 MPO D 4000K	
2021704	OPTIX SURFACE 1500 MPO D 4000K DALI	
2021705	OPTIX SURFACE 1500 MPO D 4000K DALI EM	
2021706	OPTIX SURFACE 1500 MPO D 4000K SSC	
2023911	OPTIX SURFACE 1500 MPO D 4000K SSA03	

1200x200 Direct/Indirect		
2021668	OPTIX SURFACE 1200 MPO D/I 4000K	
2021670	OPTIX SURFACE 1200 MPO D/I 4000K DALI	
2021671	OPTIX SURFACE 1200 MPO D/I 4000K DALI EM	
2021660	OPTIX SURFACE 1200 MPO D/I HO 4000K	
2021662	OPTIX SURFACE 1200 MPO D/I HO 4000K DALI	
2021663	OPTIX SURFACE 1200 MPO D/I HO 4000K DALI EM	

1500x200 Direct/Indirect		
2021696	OPTIX SURFACE 1500 MPO D/I 4000K	
2021698	OPTIX SURFACE 1500 MPO D/I 4000K DALI	
2021699	OPTIX SURFACE 1500 MPO D/I 4000K DALI EM	
2021700	OPTIX SURFACE 1500 MPO D/I 4000K SSC	
2023910	OPTIX SURFACE 1500 MPO D/I 4000K SSA03	

Dimmable


SylSmart Connected
SylSmart Standalone

Optix Surface Asymmetric

Concord



Low luminance LED ceiling light available in 1200x200mm or 1500x200mm. Ideal for lighting school blackboards. Efficiency up to 116lm/W. Luminous flux from 3380lm to 4250lm. IRC>80 - SDCM<3. Available in warm white (3000K) or neutral white (4000K). Minimalist, very discreet design for perfect integration. Photobiological risk group GR0. Expected lifetime: 100,000 hrs (L80).
5-year warranty.

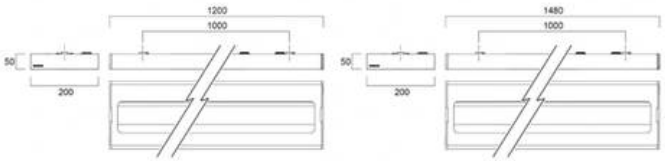

1200x200	
2021676	OPTIX SURFACE 1200 ASYMMETRIC 3000K
2021677	OPTIX SURFACE 1200 ASYMMETRIC 3000K DALI
2021678	OPTIX SURFACE 1200 ASYMMETRIC 3000K SSC
2021679	OPTIX SURFACE 1200 ASYMMETRIC 4000K
2021680	OPTIX SURFACE 1200 ASYMMETRIC 4000K DALI
2021681	OPTIX SURFACE 1200 ASYMMETRIC 4000K SSC

1500x200	
2021734	OPTIX SURFACE 1500 ASYMMETRIC 4000K
2021735	OPTIX SURFACE 1500 ASYMMETRIC 4000K DALI
2021736	OPTIX SURFACE 1500 ASYMMETRIC 4000K SSC

Accessories	
2021712	OPTIX S PLASTIC JOINING KIT
5054686	UNIVERSAL SUSPENSION KIT 1.5M
2021713	OPTIX S INFILL 600MM
2021714	OPTIX S INFILL 900MM
2021715	OPTIX S INFILL 1200MM
2021716	OPTIX S INFILL 1500MM
0044100	WALL BRACKETS
5050568	RANA ACC FULL SUSP + POWER 3CORE SET 1W
5050571	RANA ACC FULL SUSP + POWER 5CORE SET 2W
5050574	RANA ACC FULL SUSP + POWER 3CORE SET 1T
5050577	RANA ACC FULL SUSP + POWER 5CORE SET 2T
5050604	RANA ACC CEILING ROSE
2021721	OPTIX LIN ACCESSORY THR WRE 3X1,5 1200MM
2021722	OPTIX LIN ACCESSORY THR WRE 4X1,5 1200MM
2021723	OPTIX LIN ACCESSORY THR WRE 3X1,5+2X0,5 1200MM
2021724	OPTIX LIN ACCESSORY THR WRE 2X0,5+2X0,5 1200MM
2021727	OPTIX LIN ACCESSORY THR WRE 3X1,5 1500MM
2021728	OPTIX LIN ACCESSORY THR WRE 4X1,5 1500MM
2021729	OPTIX LIN ACCESSORY THR WRE 3X1,5+2X0,5 1500MM
2021730	OPTIX LIN ACCESSORY THR WRE 2X0,5+2X0,5 1500MM


Rana Neo Surface

SYLVANIA

PRO




Surface-mounted LED ceiling light offering excellent visual comfort for commercial applications. Available in sizes 600x600mm, 1200x200mm and 1500x200mm. LED diffuser, single or dual-line optics in low-luminance satin-finish aluminium (L<600 cd/m² at 65°) and UGR<19, compliant with the recommendations of standard EN 12 464-1. Luminous efficacy up to 135 lm/W. Lighting control: Traditional wired DALI / Bluetooth: SylSmart® Connected (SSA) with integrated sensor or SylSmart® Standalone (SSC) with optional remote sensing. Dimmable via standard wired switch (DALI versions) or wireless, battery-free piezoelectric switch (SylSmart® versions). Quick-connect splittable connection system (LiLo). Photobiological risk group GR0. Expected lifetime: 96,000 hours (L80). 5-year warranty.



600x600 3000K	
0054210	RANA NEO 3300LM S 600 830 CC 2L WHITE
0054212	RANA NEO 3300LM S 600 830 DALI 2L WHITE
0054214	RANA NEO 3300LM S 600 830 SSC 2L WHITE
0044680	RANA NEO 3300LM S 600 830 SSA03 2L WHITE
0054216	RANA NEO 3300LM S 600 830 CC EM 2L WHITE
0054218	RANA NEO 3300LM S 600 830 DALI EM 2L WHITE
0054220	RANA NEO 3300LM S 600 830 SSC EM 2L WHITE

600x600 4000K	
0054211	RANA NEO 3500LM S 600 840 CC 2L WHITE
0054213	RANA NEO 3500LM S 600 840 DALI 2L WHITE
0054215	RANA NEO 3500LM S 600 840 SSC 2L WHITE
0044681	RANA NEO 3500LM S 600 840 SSA03 2L WHITE
0054217	RANA NEO 3500LM S 600 840 CC EM 2L WHITE
0054219	RANA NEO 3500LM S 600 840 DALI EM 2L WHITE
0054221	RANA NEO 3500LM S 600 840 SSC EM 2L WHITE




1200x200 Low Output 3000K	
0054222	RANA NEO 3600LM S 1200 830 CC 1L WHITE
0054224	RANA NEO 3600LM S 1200 830 DALI 1L WHITE
0054226	RANA NEO 3600LM S 1200 830 SSC 1L WHITE

Dimmable

SylSmart Connected
SylSmart Standalone


1200x200 Low Output 3000K		
0044682	RANA NEO 3600LM S 1200 830 SSA03 1L WHITE	
0054228	RANA NEO 3600LM S 1200 830 CC EM 1L WHITE	
0054230	RANA NEO 3600LM S 1200 830 DALI EM 1L WHITE	
0054232	RANA NEO 3600LM S 1200 830 SSC EM 1L WHITE	

1200x200 Low Output 4000K		
0054223	RANA NEO 3800LM S 1200 840 CC 1L WHITE	
0054225	RANA NEO 3800LM S 1200 840 DALI 1L WHITE	
0054227	RANA NEO 3800LM S 1200 840 SSC 1L WHITE	
0044684	RANA NEO 3800LM S 1200 840 SSA03 1L WHITE	
0054231	RANA NEO 3800LM S 1200 840 DALI EM 1L WHITE	
0054233	RANA NEO 3800LM S 1200 840 SSC EM 1L WHITE	



1200x200 High Output 3000K		
0054234	RANA NEO 6800LM S 1200 830 CC 2L WHITE	
0054236	RANA NEO 6800LM S 1200 830 DALI 2L WHITE	
0054238	RANA NEO 6800LM S 1200 830 SSC 2L WHITE	
0044683	RANA NEO 6800LM S 1200 830 SSA03 2L WHITE	
0054240	RANA NEO 6800LM S 1200 830 CC EM 2L WHITE	
0054242	RANA NEO 6800LM S 1200 830 DALI EM 2L WHITE	
0054244	RANA NEO 6800LM S 1200 830 SSC EM 2L WHITE	

1200x200 High Output 4000K		
0054235	RANA NEO 7500LM S 1200 840 CC 2L WHITE	
0054237	RANA NEO 7500LM S 1200 840 DALI 2L WHITE	
0054239	RANA NEO 7500LM S 1200 840 SSC 2L WHITE	
0054243	RANA NEO 7500LM S 1200 840 DALI EM 2L WHITE	
0054245	RANA NEO 7500LM S 1200 840 SSC EM 2L WHITE	



1500x200 Low Output 3000K		
0054246	RANA NEO 4300LM S 1500 830 CC 1L WHITE	
0054248	RANA NEO 4300LM S 1500 830 DALI 1L WHITE	
0054250	RANA NEO 4300LM S 1500 830 SSC 1L WHITE	
0044686	RANA NEO 4400LM S 1500 830 SSA03 1L WHITE	
0054252	RANA NEO 4300LM S 1500 830 CC EM 1L WHITE	
0054254	RANA NEO 4300LM S 1500 830 DALI EM 1L WHITE	
0054256	RANA NEO 4300LM S 1500 830 SSC EM 1L WHITE	

1500x200 Low Output 4000K		
0054247	RANA NEO 4700LM S 1500 840 CC 1L WHITE	
0054249	RANA NEO 4700LM S 1500 840 DALI 1L WHITE	
0054251	RANA NEO 4700LM S 1500 840 SSC 1L WHITE	
0044688	RANA NEO 4700LM S 1500 840 SSA03 1L WHITE	
0054255	RANA NEO 4700LM S 1500 840 DALI EM 1L WHITE	
0054257	RANA NEO 4700LM S 1500 840 SSC EM 1L WHITE	



1500x200 High Output 3000K		
0054258	RANA NEO 8800LM S 1500 830 CC 2L WHITE	
0054260	RANA NEO 8800LM S 1500 830 DALI 2L WHITE	
0054262	RANA NEO 8800LM S 1500 830 SSC 2L WHITE	
0044687	RANA NEO 8800LM S 1500 830 SSA03 2L WHITE	
0054264	RANA NEO 8800LM S 1500 830 CC EM 2L WHITE	
0054266	RANA NEO 8800LM S 1500 830 DALI EM 2L WHITE	
0054268	RANA NEO 8800LM S 1500 830 SSC EM 2L WHITE	

1500x200 High Output 4000K		
0054259	RANA NEO 9500LM S 1500 840 CC 2L WHITE	
0054261	RANA NEO 9500LM S 1500 840 DALI 2L WHITE	
0044689	RANA NEO 9500LM S 1500 840 SSA03 2L WHITE	
0054265	RANA NEO 9500LM S 1500 840 CC EM 2L WHITE	
0054267	RANA NEO 9500LM S 1500 840 DALI EM 2L WHITE	
0054269	RANA NEO 9500LM S 1500 840 SSC EM 2L WHITE	

Accessories	
5050568	RANA ACC FULL SUSP + POWER 3CORE SET 1W
5050571	RANA ACC FULL SUSP + POWER 5CORE SET 2W
5050574	RANA ACC FULL SUSP + POWER 3CORE SET 1T
5050577	RANA ACC FULL SUSP + POWER 5CORE SET 2T
5050586	RANA ACC SUSP + TW 3CORE 1500 SET 5
5050604	RANA ACC CEILING ROSE
5050616	RANA ACC TW 3CORE 1500
5050622	RANA ACC LINE CLIPS 10PCS
5054686	UNIVERSAL SUSPENSION KIT 1.5M

Dimmable

SylSmart Connected
SylSmart Standalone

Areum Suspended

SYLVANIA


PRO

SylSmart




LED suspension with a discreet and elegant design. Direct/indirect light distribution (70/30%). Ideal for offices (UGR ≤ 19) and environments with computer screens in accordance with standard EN 12464-1. Luminous efficacy up to 129 lm/W. Dimmable via a standard wired switch (DALI model). Available in 4000K. The suspension cables incorporate the power supply to simplify installation while maintaining an aesthetic appearance. The luminaires can be mechanically connected using an accessory supplied for in-line assembly. Expected lifetime: 63,000 hrs (L80).

5-year warranty.



Areum Suspended 1200mm		
0042950	AREUM SUSPENDED 1200 D/I 4000K ALU	
0042958	AREUM SUSPENDED 1200 D/I 4000K EM ALU	
0042951	AREUM SUSPENDED 1200 D/I 4000K DALI ALU	
0042960	AREUM SUSPENDED 1200 D/I 4000K DALI EM ALU	
0042959	AREUM SUSPENDED 1200 D/I 4000K SSA0N ALU	
0042974	AREUM SUSPENDED 1200 D/I 4000K SSC ALU	
0042952	AREUM SUSPENDED 1200 D/I 4000K WHITE	
0042961	AREUM SUSPENDED 1200 D/I 4000K EM WHITE	
0042953	AREUM SUSPENDED 1200 D/I 4000K DALI WHITE	
0042963	AREUM SUSPENDED 1200 D/I 4000K DALI EM WHITE	
0042962	AREUM SUSPENDED 1200 D/I 4000K SSA0N WHITE	
0042975	AREUM SUSPENDED 1200 D/I 4000K SSC WHITE	



Areum Suspended 1500mm		
0042954	AREUM SUSPENDED 1500 D/I 4000K ALU	
0042964	AREUM SUSPENDED 1500 D/I 4000K EM ALU	
0042955	AREUM SUSPENDED 1500 D/I 4000K DALI ALU	
0042966	AREUM SUSPENDED 1500 D/I 4000K DALI EM ALU	
0042965	AREUM SUSPENDED 1500 D/I 4000K SSA0N ALU	
0042976	AREUM SUSPENDED 1500 D/I 4000K SSC ALU	
0042956	AREUM SUSPENDED 1500 D/I 4000K WHITE	
0042967	AREUM SUSPENDED 1500 D/I 4000K EM WHITE	
0042957	AREUM SUSPENDED 1500 D/I 4000K DALI WHITE	
0042969	AREUM SUSPENDED 1500 D/I 4000K DALI EM WHITE	
0042968	AREUM SUSPENDED 1500 D/I 4000K SSA0N WHITE	
0042977	AREUM SUSPENDED 1500 D/I 4000K SSC WHITE	

Areum Wall


SYLVANIA

PRO

SylSmart



LED wall light with a discreet and elegant design. Direct/indirect light distribution (40/60%). Ideal for offices (UGR ≤ 19) and environments with computer screens in accordance with EN 12464-1 and circulation areas, creating a uniform light image thanks to the indirect component. Luminous efficacy up to 130 lm/W. Dimmable via a standard wired switch (DALI model). Available in 4000K. Expected lifetime: 100,000 hrs (L80). 5-year warranty.



Areum Wall 4000K		
0042980	AREUM WALL 600 D/I 4000K ALU	
0042984	AREUM WALL D/I 600 4000K EM ALU	
0042981	AREUM WALL 600 D/I 4000K DALI ALU	
0042985	AREUM WALL D/I 600 4000K DALI EM ALU	
0042988	AREUM WALL D/I 600 4000K SSC ALU	
0042982	AREUM WALL 600 D/I 4000K WHITE	
0042986	AREUM WALL D/I 600 4000K EM WHITE	
0042983	AREUM WALL 600 D/I 4000K DALI WHITE	
0042987	AREUM WALL D/I 600 4000K DALI EM WHITE	
0042989	AREUM WALL D/I 600 4000K SSC WHITE	

Dimmable

SylSmart Connected
SylSmart Standalone

Gradeo Surface

SYLVANIA

PRO



Surface-mounted and suspended luminaire with prismatic diffuser, ideal for installation in classrooms. High efficiency, up to 144 lm/W. Multi-CCT (3000, 3500 & 4000K) and Multi-power solution via dip switch. UGR<19 & CRI80. Lighting management: wired Standard or DALI / Bluetooth: SylSmart® Connected (SSA03) with integrated sensor. LiFePO4 EM, microwave kit (MW), SSA03 module and indirect lighting module to be ordered as accessories. Can be surface-mounted or suspended using the kit (to be ordered separately). Length 1200 & 1500mm. Lifespan: 100,000 hrs (L80).

5-year warranty.



Gradeo		
0042740	GRADEO S 1200 830/835/840	
0042741	GRADEO S 1200 830/835/840 DALI	
0042742	GRADEO S 1500 830/835/840	
0042743	GRADEO S 1500 830/835/840 DALI	

Accessories		
0042744	GRADEO ST EM KIT	
0042745	GRADEO ST EMPRO KIT	
0042746	GRADEO MW KIT	
0042747	GRADEO SSA03 KIT	
0042748	GRADEO INDIRECT MODULE	
0042749	GRADEO SURFACE KIT	
0042750	GRADEO SUSPENSION KIT	

Deltawing G2


SYLVANIA

PRO

SylSmart®



LED ceiling light to replace traditional T5 and T8 fixtures. High efficiency (up to 135 lm/W). Multi-power solution via switch. Highly efficient prismatic diffuser made of polycarbonate. Three 5-pole terminals for easy connection and ready for through-wiring. Non-dimmable, DALI, SylSmart® Standalone, and microwave (MW) sensor versions. Suspension kit for suspended installation (ordered separately). Lifetime: 80,000 hrs (L80). 5-year warranty.



Deltawing 1200		
0042916	DELTAWING 1200 3K	
0042920	DELTAWING 1200 3K EM	
0042917	DELTAWING 1200 3K DALI	
0042921	DELTAWING 1200 3K DALI EM	
0042925	DELTAWING 1200 3K MW	
0042924	DELTAWING 1200 3K SSC	
0042930	DELTAWING 1200 4K	
0042934	DELTAWING 1200 4K EM	
0042931	DELTAWING 1200 4K DALI	
0042935	DELTAWING 1200 4K DALI EM	
0042939	DELTAWING 1200 4K MW	
0042938	DELTAWING 1200 4K SSC	

Deltawing 1500		
0042918	DELTAWING 1500 3K	
0042922	DELTAWING 1500 3K EM	
0042919	DELTAWING 1500 3K DALI	
0042923	DELTAWING 1500 3K DALI EM	
0042927	DELTAWING 1500 3K MW	
0042926	DELTAWING 1500 3K SSC	
0042932	DELTAWING 1500 4K	
0042936	DELTAWING 1500 4K EM	
0042933	DELTAWING 1500 4K DALI	
0042937	DELTAWING 1500 4K DALI EM	
0042941	DELTAWING 1500 4K MW	
0042940	DELTAWING 1500 4K SSC	

Accessories	
3044724	Wing Horizontal Wire Anchors
3044725	Wing Adjustable Bracket
3044727	Wing 45° Support on 90° Corner
3044720	Wing Suspension Kit
3044726	Wing Secure Bracket

Dimmable

SylSmart Connected
SylSmart Standalone


Sylmaster LED

SYLVANIA

PRO



Ceiling light with T8 LED tubes. Economical solution for simple commercial spaces. Low luminance optics and luminous efficacy up to 131 lm/W. Available in neutral white (4000K). Surface-mounted or suspended installation with accessories. Two sizes available: 1250x200mm and 1550x200mm. ToLEDo® Superia T8 tube lifetime: 75,000 hours (L70). 5-year warranty.



Sylmaster LED	
0051690	SYLMASTER T8 LED 1200 2L 4350LM 840
0051691	SYLMASTER T8 LED 1500 2L 5750LM 840

Sylmaster Housing	
0051692	SYLMASTER T8 LED 1200 2L HOUSING
0051693	SYLMASTER T8 LED 1500 2L HOUSING

Accessories	
5044209	Sylwing SM in line kit single
5044007	In line kit
5044008	In line suspension kit


Colossal

Concord

SylSmart®




Large and ultra-large circular architectural luminaire. Luminous flux up to 14,190 lm, with efficiency up to 120 lm/W. Available in Direct and Direct/Indirect (halo) lighting versions and in 4 diameters: 400, 600, 900, and 1,200 mm. Suspended or surface-mounted installation (and wall-mounted for the 400 and 600 mm versions). Prismatic version UGR<19 - CRI>90 and SDCM<3. DALI version (push-button compatible except Ø400 mm) and SylSmart® Connected (with detector). On request: opalized version, non-DALI, SylSmart® Standalone, CRI80 (with higher flux and efficiency). 900 and 1200mm versions: suspension kit included, order only the ceiling rose. 400 and 600mm suspended versions: mandatory accessories to be ordered. Photobiological risk group: GR0. Lifetime: 145,000 hours (L80). 5-year warranty.

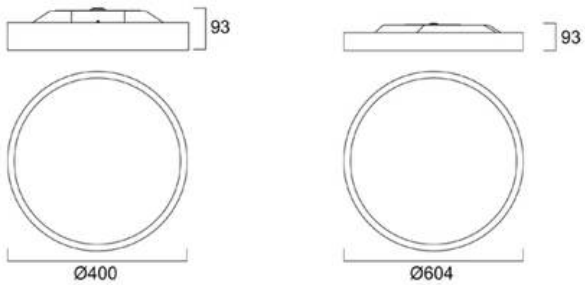

	400mm		
	2071101	Colossal 400 830 Opal Dir White	
	2071102	Colossal 400mm 830 Opal Dir White EM	✓
✓	2071103	Colossal 400mm 830 Opal Dir White DALI	
	2071111	Colossal 400mm 840 Opal Dir White	
	2071112	Colossal 400mm 840 Opal Dir White EM	✓
✓	2071113	Colossal 400mm 840 Opal Dir White DALI	
✓	2071114	Colossal 400mm 840 Opal Dir White DALI EM	✓
✓	2071115	Colossal 400mm 840 Opal Dir White SSC	
	2071329	Colossal 400mm HO 840 Opal Dir White	
	2071330	Colossal 400mm HO 840 Opal Dir White EM	✓
✓	2071331	Colossal 400mm HO 840 Opal Dir White DALI	
✓	2071332	Colossal 400mm HO 840 Opal Dir White DALI EM	✓
	2071121	Colossal 400mm 940 Opal Dir White	
	2071131	Colossal 400mm 830 Opal Dir+Hal White	
	2071132	Colossal 400mm 830 Opal Dir+Hal White EM	✓
✓	2071133	Colossal 400mm 830 Opal Dir+Hal White DALI	
✓	2071134	Colossal 400mm 830 Opal Dir+Hal White DALI EM	✓
	2071141	Colossal 400mm 840 Opal Dir+Hal White	
	2071142	Colossal 400mm 840 Opal Dir+Hal White EM	✓
✓	2071143	Colossal 400mm 840 Opal Dir+Hal White DALI	
✓	2071145	Colossal 400mm 840 Opal Dir+Hal White SSC	
	2071333	Colossal 400mm HO 840 Opal Dir+Hal White	
✓	2071335	Colossal 400mm HO 840 Opal Dir+Hal White DALI	
✓	2071336	Colossal 400mm HO 840 Opal Dir+Hal White DALI EM	✓
	2071151	Colossal 400mm 940 Opal Dir+Hal White	
	2071106	Colossal 400mm 830 Prism Dir White	
✓	2071108	Colossal 400mm 830 Prism Dir White DALI	
	2071116	Colossal 400mm 840 Prism Dir White	
	2071117	Colossal 400mm 840 Prism Dir White EM	✓
✓	2071118	Colossal 400mm 840 Prism Dir White DALI	

400mm	
2071120	Colossal 400mm 840 Prism Dir White SSC
2071128	Colossal 400mm 940 Prism Dir White DALI
2071136	Colossal 400mm 830 Prism Dir+Hal White
2071138	Colossal 400mm 830 Prism Dir+Hal White DALI
2071140	Colossal 400mm 830 Prism Dir+Hal White SSC
2071146	Colossal 400mm 840 Prism Dir+Hal White
2071147	Colossal 400mm 840 Prism Dir+Hal White EM
2071148	Colossal 400mm 840 Prism Dir+Hal White DALI
2071158	Colossal 400mm 940 Prism Dir+Hal White DALI

600mm	
2071161	Colossal 600mm 830 Opal Dir White
2071162	Colossal 600mm 830 Opal Dir White EM
2071163	Colossal 600mm 830 Opal Dir White DALI
2071164	Colossal 600mm 830 Opal Dir White DALI EM
2071166	Colossal 600mm 830 Opal Dir White SSC
2071173	Colossal 600mm 840 Opal Dir White
2071174	Colossal 600mm 840 Opal Dir White EM
2071175	Colossal 600mm 840 Opal Dir White DALI
2071176	Colossal 600mm 840 Opal Dir White DALI EM
2071178	Colossal 600mm 840 Opal Dir White SSC
2071185	Colossal 600mm 940 Opal Dir White
2071186	Colossal 600mm 940 OPAL Dir White EM
2071187	Colossal 600mm 940 Opal Dir White DALI
2071197	Colossal 600mm 830 Opal Dir+Hal White
2071199	Colossal 600mm 830 Opal Dir+Hal White DALI
2071406	Colossal 600mm 830 Opal Dir+Hal White SSA03
2071202	Colossal 600mm 830 Opal Dir+Hal White SSC
2071209	Colossal 600mm 840 Opal Dir+Hal White
2071210	Colossal 600mm 840 Opal Dir+Hal White EM
2071408	Colossal 600mm 840 Opal Dir+Hal White SSA03
2071214	Colossal 600mm 840 Opal Dir+Hal White SSC
2071223	Colossal 600mm 940 Opal Dir+Hal White DALI
2071410	Colossal 600mm 940 Opal Dir+Hal White SSA03
2071167	Colossal 600mm 830 Prism Dir White
2071169	Colossal 600mm 830 Prism Dir White DALI
2071401	Colossal 600mm 830 Prism Dir White SSA03
2071179	Colossal 600mm 840 Prism Dir White
2071180	Colossal 600mm 840 Prism Dir White EM
2071181	Colossal 600mm 840 Prism Dir White DALI
2071403	Colossal 600mm 840 Prism Dir White SSA03
2071193	Colossal 600mm 940 Prism Dir White DALI
2071405	Colossal 600mm 940 Prism Dir White SSA03
2071203	Colossal 600mm 830 Prism Dir+Hal White
2071205	Colossal 600mm 830 Prism Dir+Hal White DALI
2071215	Colossal 600mm 840 Prism Dir+Hal White
2071217	Colossal 600mm 840 Prism Dir+Hal White DALI
2071220	Colossal 600mm 840 Prism Dir+Hal White SSC
2071229	Colossal 600mm 940 Prism Dir+Hal White DALI
2071411	Colossal 600mm 940 Prism Dir+Hal White SSA03
2071232	Colossal 600mm 940 Prism Dir+Hal White SSC

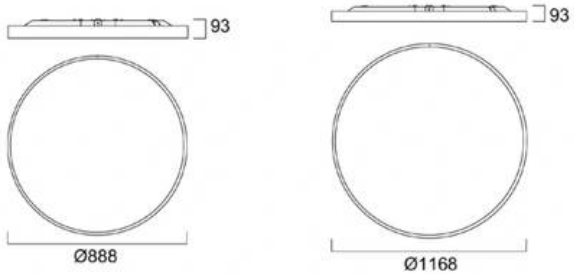

900mm	
2071233	Colossal 900mm 830 Opal Dir White DALI
2071412	Colossal 900mm 830 Opal Dir White SSA03
2071241	Colossal 900mm 840 Opal Dir White DALI
2071242	Colossal 900mm 840 Opal Dir White DALI EM
2071414	Colossal 900mm 840 Opal Dir White SSA03
2071244	Colossal 900mm 840 Opal Dir White SSC
2071249	Colossal 900mm 940 Opal Dir White DALI
2071257	Colossal 900mm 830 Opal Dir+Hal White DALI
2071265	Colossal 900mm 840 Opal Dir+Hal White DALI
2071266	Colossal 900mm 840 Opal Dir+Hal White DALI EM
2071268	Colossal 900mm 840 Opal Dir+Hal White SSC
2071273	Colossal 900mm 940 Opal Dir+Hal White DALI
2071237	Colossal 900mm 830 Prism Dir White DALI
2071245	Colossal 900mm 840 Prism Dir White DALI
2071253	Colossal 900mm 940 Prism Dir White DALI
2071417	Colossal 900mm 940 Prism Dir White SSA03
2071256	Colossal 900mm 940 Prism Dir White SSC
2071261	Colossal 900mm 830 Prism Dir+Hal White DALI
2071419	Colossal 900mm 830 Prism Dir+Hal White SSA03
2071269	Colossal 900mm 840 Prism Dir+Hal White DALI
2071277	Colossal 900mm 940 Prism Dir+Hal White DALI
2071423	Colossal 900mm 940 Prism Dir+Hal White SSA03

1200mm	
2071281	Colossal 1200mm 830 Opal Dir White DALI
2071289	Colossal 1200mm 840 Opal Dir White DALI
2071292	Colossal 1200mm 840 Opal Dir White SSC
2071297	Colossal 1200mm 940 Opal Dir White DALI
2071305	Colossal 1200mm 830 Opal Dir+Hal White DALI
2071313	Colossal 1200mm 840 Opal Dir+Hal White DALI
2071314	Colossal 1200mm 840 Opal Dir+Hal White DALI EM
2071285	Colossal 1200mm 830 Prism Dir White DALI
2071293	Colossal 1200mm 840 Prism Dir White DALI
2071294	Colossal 1200mm 840 Prism Dir White DALI EM
2071296	Colossal 1200mm 840 Prism Dir White SSC
2071301	Colossal 1200mm 940 Prism Dir White DALI
2071429	Colossal 1200mm 940 Prism Dir White SSA03
2071309	Colossal 1200mm 830 Prism Dir+Hal White DALI
2071317	Colossal 1200mm 840 Prism Dir+Hal White DALI
2071435	Colossal 1200mm 940 Prism Dir+Hal White SSA03

Accessories	
2071091	Colossal Ceiling Rose
2071092	Colossal Ceiling Rose + Suspension Kit 400/600mm
2071094	Colossal 3core Power Cable 6m Transparent
2071095	Colossal 5core Power Cable 6m Transparent

Dimmable

SylSmart Connected
SylSmart Standalone


Areum Floorstanding

SYLVANIA

PRO



LED floor lamp for free-standing installation in commercial spaces. Direct/indirect (25/75%) light distribution, dimmable via a button on the pole, for high visual comfort and uniform luminance distribution. High-performance microprismatic diffuser to control glare (UGR<14). 2m high pole ideal for all types of offices, U-shaped base for easy positioning. Version with integrated PIR sensor. Luminous efficacy up to 142 lm/W. Finish: white RAL9016. Lifetime: 60,000 hours (L80). 5-year warranty.



Areum Floor	
0042970	AREUM FLOOR 14KLM 4000K ALU
0042971	AREUM FLOOR 14KLM 4000K PIR ALU
0042972	AREUM FLOOR 14KLM 4000K WHITE
0042973	AREUM FLOOR 14KLM 4000K PIR WHITE


Accessory	
9048887	AREUM FLOOR PIR PROGRAMMER ILD G2 FSL

Continuum Plus

Concord

SylSmart®

Trimless aluminum body in a length from 605 to 4805mm,DALI dimmable or SylSmart® Connected enabled. Available in standalone surface and pendant versions as well as continuous versions. Either 100% downward or 60/40% D/I light distribution ratio. Direct/indirect versions are available with two-channel DALI drivers for independent light control. UGR<19 version with up to 150lm/W efficacy and opal diffuser with up to 140lm/W efficacy. CRI>90. 4000K (neutral white) CCT light source. SDCM≤3. IK03 impact resistance level. IP20 ingress protection. Available with 3 hours LiFePO4 Emergency. High quality aluminium body with matte white (RAL9016) or Black (RAL9005) finishing colour. Lifespan 93,000hrs (L80). 5 years warranty.

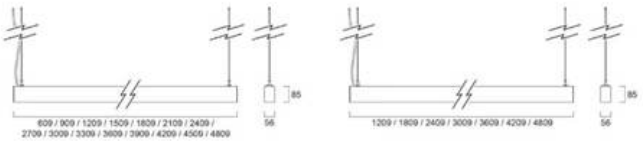

Standalone UGR Direct		
2064500	CONTINUUM PLUS 1.2 940 ST UGR D DALI W	
2064678	CONTINUUM PLUS 1.5 940 ST UGR D DALI W	
2064702	CONTINUUM PLUS 1.8 940 ST UGR D DALI W	
2064742	CONTINUUM PLUS 2.1 940 ST UGR D DALI W	
2064501	CONTINUUM PLUS 2.4 940 ST UGR D DALI W	
2064766	CONTINUUM PLUS 2.7 940 ST UGR D DALI W	
2064790	CONTINUUM PLUS 3.0 940 ST UGR D DALI W	
2064830	CONTINUUM PLUS 3.3 940 ST UGR D DALI W	
2064854	CONTINUUM PLUS 3.6 940 ST UGR D DALI W	
2064894	CONTINUUM PLUS 3.9 940 ST UGR D DALI W	
2064918	CONTINUUM PLUS 4.2 940 ST UGR D DALI W	
2064958	CONTINUUM PLUS 4.5 940 ST UGR D DALI W	
2065047	CONTINUUM PLUS 4.8 940 ST UGR D DALI W	
2064502	CONTINUUM PLUS 1.2 940 ST UGR D DALI B	
2064680	CONTINUUM PLUS 1.5 940 ST UGR D DALI B	
2064704	CONTINUUM PLUS 1.8 940 ST UGR D DALI B	
2064744	CONTINUUM PLUS 2.1 940 ST UGR D DALI B	
2064503	CONTINUUM PLUS 2.4 940 ST UGR D DALI B	
2064768	CONTINUUM PLUS 2.7 940 ST UGR D DALI B	
2064792	CONTINUUM PLUS 3.0 940 ST UGR D DALI B	
2064832	CONTINUUM PLUS 3.3 940 ST UGR D DALI B	
2064856	CONTINUUM PLUS 3.6 940 ST UGR D DALI B	
2064896	CONTINUUM PLUS 3.9 940 ST UGR D DALI B	
2064920	CONTINUUM PLUS 4.2 940 ST UGR D DALI B	
2064960	CONTINUUM PLUS 4.5 940 ST UGR D DALI B	
2065049	CONTINUUM PLUS 4.8 940 ST UGR D DALI B	
2064504	CONTINUUM PLUS 1.2 940 ST UGR D DALI EM W	
2064679	CONTINUUM PLUS 1.5 940 ST UGR D DALI EM W	
2064703	CONTINUUM PLUS 1.8 940 ST UGR D DALI EM W	
2064743	CONTINUUM PLUS 2.1 940 ST UGR D DALI EM W	
2064505	CONTINUUM PLUS 2.4 940 ST UGR D DALI EM W	
2064767	CONTINUUM PLUS 2.7 940 ST UGR D DALI EM W	
2064791	CONTINUUM PLUS 3.0 940 ST UGR D DALI EM W	
2064831	CONTINUUM PLUS 3.3 940 ST UGR D DALI EM W	
2064855	CONTINUUM PLUS 3.6 940 ST UGR D DALI EM W	
2064895	CONTINUUM PLUS 3.9 940 ST UGR D DALI EM W	

Dimmable

SylSmart Connected
SylSmart Standalone

Standalone UGR Direct

2064919	CONTINUUM PLUS 4.2 940 ST UGR D DALI EM W	
2064959	CONTINUUM PLUS 4.5 940 ST UGR D DALI EM W	
2065048	CONTINUUM PLUS 4.8 940 ST UGR D DALI EM W	
2064506	CONTINUUM PLUS 1.2 940 ST UGR D DALI EM B	
2064681	CONTINUUM PLUS 1.5 940 ST UGR D DALI EM B	
2064705	CONTINUUM PLUS 1.8 940 ST UGR D DALI EM B	
2064745	CONTINUUM PLUS 2.1 940 ST UGR D DALI EM B	
2064507	CONTINUUM PLUS 2.4 940 ST UGR D DALI EM B	
2064769	CONTINUUM PLUS 2.7 940 ST UGR D DALI EM B	
2064793	CONTINUUM PLUS 3.0 940 ST UGR D DALI EM B	
2064833	CONTINUUM PLUS 3.3 940 ST UGR D DALI EM B	
2064857	CONTINUUM PLUS 3.6 940 ST UGR D DALI EM B	
2064897	CONTINUUM PLUS 3.9 940 ST UGR D DALI EM B	
2064921	CONTINUUM PLUS 4.2 940 ST UGR D DALI EM B	
2064961	CONTINUUM PLUS 4.5 940 ST UGR D DALI EM B	
2065050	CONTINUUM PLUS 4.8 940 ST UGR D DALI EM B	
2064623	CONTINUUM PLUS 1.2 940 ST UGR D SSA03 W	
2064624	CONTINUUM PLUS 1.2 940 ST UGR D SSA03 B	
2064625	CONTINUUM PLUS 1.2 940 ST UGR D SSA03 EM W	
2064626	CONTINUUM PLUS 1.2 940 ST UGR D SSA03 EM B	

Standalone UGR Direct/Indirect

2064530	CONTINUUM PLUS 1.2 940 ST UGR DI DALI W	
2064710	CONTINUUM PLUS 1.8 940 ST UGR DI DALI W	
2064531	CONTINUUM PLUS 2.4 940 ST UGR DI DALI W	
2064798	CONTINUUM PLUS 3.0 940 ST UGR DI DALI W	
2064862	CONTINUUM PLUS 3.6 940 ST UGR DI DALI W	
2064926	CONTINUUM PLUS 4.2 940 ST UGR DI DALI W	
2065055	CONTINUUM PLUS 4.8 940 ST UGR DI DALI W	
2064534	CONTINUUM PLUS 1.2 940 ST UGR DI DALI B	
2064712	CONTINUUM PLUS 1.8 940 ST UGR DI DALI B	
2064535	CONTINUUM PLUS 2.4 940 ST UGR DI DALI B	
2064800	CONTINUUM PLUS 3.0 940 ST UGR DI DALI B	
2064864	CONTINUUM PLUS 3.6 940 ST UGR DI DALI B	
2064928	CONTINUUM PLUS 4.2 940 ST UGR DI DALI B	
2065057	CONTINUUM PLUS 4.8 940 ST UGR DI DALI B	
2064538	CONTINUUM PLUS 1.2 940 ST UGR DI DALI EM W	
2064711	CONTINUUM PLUS 1.8 940 ST UGR DI DALI EM W	
2064539	CONTINUUM PLUS 2.4 940 ST UGR DI DALI EM W	
2064799	CONTINUUM PLUS 3.0 940 ST UGR DI DALI EM W	
2064863	CONTINUUM PLUS 3.6 940 ST UGR DI DALI EM W	
2064927	CONTINUUM PLUS 4.2 940 ST UGR DI DALI EM W	
2065056	CONTINUUM PLUS 4.8 940 ST UGR DI DALI EM W	
2064542	CONTINUUM PLUS 1.2 940 ST UGR DI DALI EM B	
2064713	CONTINUUM PLUS 1.8 940 ST UGR DI DALI EM B	
2064543	CONTINUUM PLUS 2.4 940 ST UGR DI DALI EM B	
2064801	CONTINUUM PLUS 3.0 940 ST UGR DI DALI EM B	
2064865	CONTINUUM PLUS 3.6 940 ST UGR DI DALI EM B	
2064929	CONTINUUM PLUS 4.2 940 ST UGR DI DALI EM B	
2065058	CONTINUUM PLUS 4.8 940 ST UGR DI DALI EM B	
2064636	CONTINUUM PLUS 1.2 940 ST UGR DI SSA03 W	
2064638	CONTINUUM PLUS 1.2 940 ST UGR DI SSA03 B	
2064640	CONTINUUM PLUS 1.2 940 ST UGR DI SSA03 EM W	
2064642	CONTINUUM PLUS 1.2 940 ST UGR DI SSA03 EM B	

Standalone Opal Direct

2064550	CONTINUUM PLUS 1.2 940 ST OPAL D DALI W	
2064682	CONTINUUM PLUS 1.5 940 ST OPAL D DALI W	
2064706	CONTINUUM PLUS 1.8 940 ST OPAL D DALI W	
2064746	CONTINUUM PLUS 2.1 940 ST OPAL D DALI W	
2064551	CONTINUUM PLUS 2.4 940 ST OPAL D DALI W	
2064770	CONTINUUM PLUS 2.7 940 ST OPAL D DALI W	
2064794	CONTINUUM PLUS 3.0 940 ST OPAL D DALI W	
2064834	CONTINUUM PLUS 3.3 940 ST OPAL D DALI W	
2064858	CONTINUUM PLUS 3.6 940 ST OPAL D DALI W	
2064898	CONTINUUM PLUS 3.9 940 ST OPAL D DALI W	

Standalone Opal Direct

2064922	CONTINUUM PLUS 4.2 940 ST OPAL D DALI W	
2064962	CONTINUUM PLUS 4.5 940 ST OPAL D DALI W	
2065051	CONTINUUM PLUS 4.8 940 ST OPAL D DALI W	
2064552	CONTINUUM PLUS 1.2 940 ST OPAL D DALI B	
2064684	CONTINUUM PLUS 1.5 940 ST OPAL D DALI B	
2064708	CONTINUUM PLUS 1.8 940 ST OPAL D DALI B	
2064748	CONTINUUM PLUS 2.1 940 ST OPAL D DALI B	
2064553	CONTINUUM PLUS 2.4 940 ST OPAL D DALI B	
2064772	CONTINUUM PLUS 2.7 940 ST OPAL D DALI B	
2064796	CONTINUUM PLUS 3.0 940 ST OPAL D DALI B	
2064836	CONTINUUM PLUS 3.3 940 ST OPAL D DALI B	
2064860	CONTINUUM PLUS 3.6 940 ST OPAL D DALI B	
2064900	CONTINUUM PLUS 3.9 940 ST OPAL D DALI B	
2064924	CONTINUUM PLUS 4.2 940 ST OPAL D DALI B	
2064964	CONTINUUM PLUS 4.5 940 ST OPAL D DALI B	
2065053	CONTINUUM PLUS 4.8 940 ST OPAL D DALI B	
2064554	CONTINUUM PLUS 1.2 940 ST OPAL D DALI EM W	
2064683	CONTINUUM PLUS 1.5 940 ST OPAL D DALI EM W	
2064707	CONTINUUM PLUS 1.8 940 ST OPAL D DALI EM W	
2064747	CONTINUUM PLUS 2.1 940 ST OPAL D DALI EM W	
2064555	CONTINUUM PLUS 2.4 940 ST OPAL D DALI EM W	
2064771	CONTINUUM PLUS 2.7 940 ST OPAL D DALI EM W	
2064795	CONTINUUM PLUS 3.0 940 ST OPAL D DALI EM W	
2064835	CONTINUUM PLUS 3.3 940 ST OPAL D DALI EM W	
2064859	CONTINUUM PLUS 3.6 940 ST OPAL D DALI EM W	
2064899	CONTINUUM PLUS 3.9 940 ST OPAL D DALI EM W	
2064923	CONTINUUM PLUS 4.2 940 ST OPAL D DALI EM W	
2064963	CONTINUUM PLUS 4.5 940 ST OPAL D DALI EM W	
2065052	CONTINUUM PLUS 4.8 940 ST OPAL D DALI EM W	
2064556	CONTINUUM PLUS 1.2 940 ST OPAL D DALI EM B	
2064685	CONTINUUM PLUS 1.5 940 ST OPAL D DALI EM B	
2064709	CONTINUUM PLUS 1.8 940 ST OPAL D DALI EM B	
2064749	CONTINUUM PLUS 2.1 940 ST OPAL D DALI EM B	
2064557	CONTINUUM PLUS 2.4 940 ST OPAL D DALI EM B	
2064773	CONTINUUM PLUS 2.7 940 ST OPAL D DALI EM B	
2064797	CONTINUUM PLUS 3.0 940 ST OPAL D DALI EM B	
2064837	CONTINUUM PLUS 3.3 940 ST OPAL D DALI EM B	
2064861	CONTINUUM PLUS 3.6 940 ST OPAL D DALI EM B	
2064901	CONTINUUM PLUS 3.9 940 ST OPAL D DALI EM B	
2064925	CONTINUUM PLUS 4.2 940 ST OPAL D DALI EM B	
2064965	CONTINUUM PLUS 4.5 940 ST OPAL D DALI EM B	
2065054	CONTINUUM PLUS 4.8 940 ST OPAL D DALI EM B	
2064643	CONTINUUM PLUS 1.2 940 ST OPAL D SSA03 W	
2064644	CONTINUUM PLUS 1.2 940 ST OPAL D SSA03 B	
2064645	CONTINUUM PLUS 1.2 940 ST OPAL D SSA03 EM W	
2064646	CONTINUUM PLUS 1.2 940 ST OPAL D SSA03 EM B	

Standalone Opal Direct/Indirect

2064580	CONTINUUM PLUS 1.2 940 ST OPAL DI DALI W	
2064714	CONTINUUM PLUS 1.8 940 ST OPAL DI DALI W	
2064581	CONTINUUM PLUS 2.4 940 ST OPAL DI DALI W	
2064802	CONTINUUM PLUS 3.0 940 ST OPAL DI DALI W	
2064866	CONTINUUM PLUS 3.6 940 ST OPAL DI DALI W	
2064930	CONTINUUM PLUS 4.2 940 ST OPAL DI DALI W	
2065059	CONTINUUM PLUS 4.8 940 ST OPAL DI DALI W	
2064584	CONTINUUM PLUS 1.2 940 ST OPAL DI DALI B	
2064716	CONTINUUM PLUS 1.8 940 ST OPAL DI DALI B	
2064585	CONTINUUM PLUS 2.4 940 ST OPAL DI DALI B	
2064804	CONTINUUM PLUS 3.0 940 ST OPAL DI DALI B	
2064868	CONTINUUM PLUS 3.6 940 ST OPAL DI DALI B	
2064932	CONTINUUM PLUS 4.2 940 ST OPAL DI DALI B	
2065061	CONTINUUM PLUS 4.8 940 ST OPAL DI DALI B	
2064588	CONTINUUM PLUS 1.2 940 ST OPAL DI DALI EM W	
2064715	CONTINUUM PLUS 1.8 940 ST OPAL DI DALI EM W	
2064589	CONTINUUM PLUS 2.4 940 ST OPAL DI DALI EM W	
2064803	CONTINUUM PLUS 3.0 940 ST OPAL DI DALI EM W	

Dimmable

SylSmart Connected
SylSmart Standalone

Standalone Opal Direct/Indirect

2064867	CONTINUUM PLUS 3.6 940 ST OPAL DI DALI EM W	
2064931	CONTINUUM PLUS 4.2 940 ST OPAL DI DALI EM W	
2065060	CONTINUUM PLUS 4.8 940 ST OPAL DI DALI EM W	
2064592	CONTINUUM PLUS 1.2 940 ST OPAL DI DALI EM B	
2064717	CONTINUUM PLUS 1.8 940 ST OPAL DI DALI EM B	
2064593	CONTINUUM PLUS 2.4 940 ST OPAL DI DALI EM B	
2064805	CONTINUUM PLUS 3.0 940 ST OPAL DI DALI EM B	
2064869	CONTINUUM PLUS 3.6 940 ST OPAL DI DALI EM B	
2064933	CONTINUUM PLUS 4.2 940 ST OPAL DI DALI EM B	
2065062	CONTINUUM PLUS 4.8 940 ST OPAL DI DALI EM B	
2064656	CONTINUUM PLUS 1.2 940 ST OPAL DI SSA03 W	
2064658	CONTINUUM PLUS 1.2 940 ST OPAL DI SSA03 B	
2064660	CONTINUUM PLUS 1.2 940 ST OPAL DI SSA03 EM W	
2064662	CONTINUUM PLUS 1.2 940 ST OPAL DI SSA03 EM B	

Continuous UGR Direct

2064518	CONTINUUM PLUS 0.6 940 CO UGR D DALI W	
2064670	CONTINUUM PLUS 0.9 940 CO UGR D DALI W	
2064519	CONTINUUM PLUS 1.2 940 CO UGR D DALI W	
2064686	CONTINUUM PLUS 1.5 940 CO UGR D DALI W	
2064718	CONTINUUM PLUS 1.8 940 CO UGR D DALI W	
2064750	CONTINUUM PLUS 2.1 940 CO UGR D DALI W	
2064520	CONTINUUM PLUS 2.4 940 CO UGR D DALI W	
2064774	CONTINUUM PLUS 2.7 940 CO UGR D DALI W	
2064806	CONTINUUM PLUS 3.0 940 CO UGR D DALI W	
2064838	CONTINUUM PLUS 3.3 940 CO UGR D DALI W	
2064870	CONTINUUM PLUS 3.6 940 CO UGR D DALI W	
2064902	CONTINUUM PLUS 3.9 940 CO UGR D DALI W	
2064934	CONTINUUM PLUS 4.2 940 CO UGR D DALI W	
2064966	CONTINUUM PLUS 4.5 940 CO UGR D DALI W	
2065063	CONTINUUM PLUS 4.8 940 CO UGR D DALI W	
2064521	CONTINUUM PLUS 0.6 940 CO UGR D DALI B	
2064671	CONTINUUM PLUS 0.9 940 CO UGR D DALI B	
2064522	CONTINUUM PLUS 1.2 940 CO UGR D DALI B	
2064688	CONTINUUM PLUS 1.5 940 CO UGR D DALI B	
2064720	CONTINUUM PLUS 1.8 940 CO UGR D DALI B	
2064752	CONTINUUM PLUS 2.1 940 CO UGR D DALI B	
2064523	CONTINUUM PLUS 2.4 940 CO UGR D DALI B	
2064776	CONTINUUM PLUS 2.7 940 CO UGR D DALI B	
2064808	CONTINUUM PLUS 3.0 940 CO UGR D DALI B	
2064840	CONTINUUM PLUS 3.3 940 CO UGR D DALI B	
2064872	CONTINUUM PLUS 3.6 940 CO UGR D DALI B	
2064904	CONTINUUM PLUS 3.9 940 CO UGR D DALI B	
2064936	CONTINUUM PLUS 4.2 940 CO UGR D DALI B	
2064968	CONTINUUM PLUS 4.5 940 CO UGR D DALI B	
2065065	CONTINUUM PLUS 4.8 940 CO UGR D DALI B	
2064524	CONTINUUM PLUS 1.2 940 CO UGR D DALI EM W	
2064687	CONTINUUM PLUS 1.5 940 CO UGR D DALI EM W	
2064719	CONTINUUM PLUS 1.8 940 CO UGR D DALI EM W	
2064751	CONTINUUM PLUS 2.1 940 CO UGR D DALI EM W	
2064525	CONTINUUM PLUS 2.4 940 CO UGR D DALI EM W	
2064775	CONTINUUM PLUS 2.7 940 CO UGR D DALI EM W	
2064807	CONTINUUM PLUS 3.0 940 CO UGR D DALI EM W	
2064839	CONTINUUM PLUS 3.3 940 CO UGR D DALI EM W	
2064871	CONTINUUM PLUS 3.6 940 CO UGR D DALI EM W	
2064903	CONTINUUM PLUS 3.9 940 CO UGR D DALI EM W	
2064935	CONTINUUM PLUS 4.2 940 CO UGR D DALI EM W	
2064967	CONTINUUM PLUS 4.5 940 CO UGR D DALI EM W	
2065064	CONTINUUM PLUS 4.8 940 CO UGR D DALI EM W	
2064526	CONTINUUM PLUS 1.2 940 CO UGR D DALI EM B	
2064689	CONTINUUM PLUS 1.5 940 CO UGR D DALI EM B	
2064721	CONTINUUM PLUS 1.8 940 CO UGR D DALI EM B	
2064753	CONTINUUM PLUS 2.1 940 CO UGR D DALI EM B	
2064527	CONTINUUM PLUS 2.4 940 CO UGR D DALI EM B	
2064777	CONTINUUM PLUS 2.7 940 CO UGR D DALI EM B	
2064809	CONTINUUM PLUS 3.0 940 CO UGR D DALI EM B	

Continuous UGR Direct

2064841	CONTINUUM PLUS 3.3 940 CO UGR D DALI EM B	
2064873	CONTINUUM PLUS 3.6 940 CO UGR D DALI EM B	
2064905	CONTINUUM PLUS 3.9 940 CO UGR D DALI EM B	
2064937	CONTINUUM PLUS 4.2 940 CO UGR D DALI EM B	
2064969	CONTINUUM PLUS 4.5 940 CO UGR D DALI EM B	
2065066	CONTINUUM PLUS 4.8 940 CO UGR D DALI EM B	
2064631	CONTINUUM PLUS 1.2 940 CO UGR D SSA03 W	
2064632	CONTINUUM PLUS 1.2 940 CO UGR D SSA03 B	
2064633	CONTINUUM PLUS 1.2 940 CO UGR D SSA03 EM W	
2064634	CONTINUUM PLUS 1.2 940 CO UGR D SSA03 EM B	

Continuous UGR Direct/Indirect

2064528	CONTINUUM PLUS 1.2 940 CO UGR DI DALI W	
2064726	CONTINUUM PLUS 1.8 940 CO UGR DI DALI W	
2064529	CONTINUUM PLUS 2.4 940 CO UGR DI DALI W	
2064814	CONTINUUM PLUS 3.0 940 CO UGR DI DALI W	
2064878	CONTINUUM PLUS 3.6 940 CO UGR DI DALI W	
2064942	CONTINUUM PLUS 4.2 940 CO UGR DI DALI W	
2065071	CONTINUUM PLUS 4.8 940 CO UGR DI DALI W	
2064532	CONTINUUM PLUS 1.2 940 CO UGR DI DALI B	
2064728	CONTINUUM PLUS 1.8 940 CO UGR DI DALI B	
2064533	CONTINUUM PLUS 2.4 940 CO UGR DI DALI B	
2064816	CONTINUUM PLUS 3.0 940 CO UGR DI DALI B	
2064880	CONTINUUM PLUS 3.6 940 CO UGR DI DALI B	
2064944	CONTINUUM PLUS 4.2 940 CO UGR DI DALI B	
2065073	CONTINUUM PLUS 4.8 940 CO UGR DI DALI B	
2064536	CONTINUUM PLUS 1.2 940 CO UGR DI DALI EM W	
2064727	CONTINUUM PLUS 1.8 940 CO UGR DI DALI EM W	
2064537	CONTINUUM PLUS 2.4 940 CO UGR DI DALI EM W	
2064879	CONTINUUM PLUS 3.6 940 CO UGR DI DALI EM W	
2064815	CONTINUUM PLUS 3.0 940 CO UGR DI DALI EM W	
2064943	CONTINUUM PLUS 4.2 940 CO UGR DI DALI EM W	
2065072	CONTINUUM PLUS 4.8 940 CO UGR DI DALI EM W	
2064540	CONTINUUM PLUS 1.2 940 CO UGR DI DALI EM B	
2064729	CONTINUUM PLUS 1.8 940 CO UGR DI DALI EM B	
2064541	CONTINUUM PLUS 2.4 940 CO UGR DI DALI EM B	
2064817	CONTINUUM PLUS 3.0 940 CO UGR DI DALI EM B	
2064881	CONTINUUM PLUS 3.6 940 CO UGR DI DALI EM B	
2064945	CONTINUUM PLUS 4.2 940 CO UGR DI DALI EM B	
2065074	CONTINUUM PLUS 4.8 940 CO UGR DI DALI EM B	
2064635	CONTINUUM PLUS 1.2 940 CO UGR DI SSA03 W	
2064637	CONTINUUM PLUS 1.2 940 CO UGR DI SSA03 B	
2064639	CONTINUUM PLUS 1.2 940 CO UGR DI SSA03 EM W	
2064641	CONTINUUM PLUS 1.2 940 CO UGR DI SSA03 EM B	

Continuous Opal Direct

2064568	CONTINUUM PLUS 0.6 940 CO OPAL D DALI W
2064672	CONTINUUM PLUS 0.9 940 CO OPAL D DALI W
2064569	CONTINUUM PLUS 1.2 940 CO OPAL D DALI W
2064690	CONTINUUM PLUS 1.5 940 CO OPAL D DALI W
2064722	CONTINUUM PLUS 1.8 940 CO OPAL D DALI W
2064754	CONTINUUM PLUS 2.1 940 CO OPAL D DALI W
2064570	CONTINUUM PLUS 2.4 940 CO OPAL D DALI W
2064778	CONTINUUM PLUS 2.7 940 CO OPAL D DALI W
2064810	CONTINUUM PLUS 3.0 940 CO OPAL D DALI W
2064842	CONTINUUM PLUS 3.3 940 CO OPAL D DALI W
2064874	CONTINUUM PLUS 3.6 940 CO OPAL D DALI W
2064906	CONTINUUM PLUS 3.9 940 CO OPAL D DALI W
2064938	CONTINUUM PLUS 4.2 940 CO OPAL D DALI W
2064970	CONTINUUM PLUS 4.5 940 CO OPAL D DALI W
2065067	CONTINUUM PLUS 4.8 940 CO OPAL D DALI W
2064571	CONTINUUM PLUS 0.6 940 CO OPAL D DALI B
2064673	CONTINUUM PLUS 0.9 940 CO OPAL D DALI B
2064572	CONTINUUM PLUS 1.2 940 CO OPAL D DALI B
2064692	CONTINUUM PLUS 1.5 940 CO OPAL D DALI B
2064724	CONTINUUM PLUS 1.8 940 CO OPAL D DALI B

Dimmable

SylSmart Connected
SylSmart Standalone

Continuous Opal Direct

2064756	CONTINUUM PLUS 2.1 940 CO OPAL D DALI B	
2064573	CONTINUUM PLUS 2.4 940 CO OPAL D DALI B	
2064780	CONTINUUM PLUS 2.7 940 CO OPAL D DALI B	
2064812	CONTINUUM PLUS 3.0 940 CO OPAL D DALI B	
2064844	CONTINUUM PLUS 3.3 940 CO OPAL D DALI B	
2064876	CONTINUUM PLUS 3.6 940 CO OPAL D DALI B	
2064908	CONTINUUM PLUS 3.9 940 CO OPAL D DALI B	
2064940	CONTINUUM PLUS 4.2 940 CO OPAL D DALI B	
2064972	CONTINUUM PLUS 4.5 940 CO OPAL D DALI B	
2065069	CONTINUUM PLUS 4.8 940 CO OPAL D DALI B	
2064574	CONTINUUM PLUS 1.2 940 CO OPAL D DALI EM W	✱
2064691	CONTINUUM PLUS 1.5 940 CO OPAL D DALI EM W	✱
2064723	CONTINUUM PLUS 1.8 940 CO OPAL D DALI EM W	✱
2064755	CONTINUUM PLUS 2.1 940 CO OPAL D DALI EM W	✱
2064575	CONTINUUM PLUS 2.4 940 CO OPAL D DALI EM W	✱
2064779	CONTINUUM PLUS 2.7 940 CO OPAL D DALI EM W	✱
2064811	CONTINUUM PLUS 3.0 940 CO OPAL D DALI EM W	✱
2064843	CONTINUUM PLUS 3.3 940 CO OPAL D DALI EM W	✱
2064875	CONTINUUM PLUS 3.6 940 CO OPAL D DALI EM W	✱
2064907	CONTINUUM PLUS 3.9 940 CO OPAL D DALI EM W	✱
2064939	CONTINUUM PLUS 4.2 940 CO OPAL D DALI EM W	✱
2064971	CONTINUUM PLUS 4.5 940 CO OPAL D DALI EM W	✱
2065068	CONTINUUM PLUS 4.8 940 CO OPAL D DALI EM W	✱
2064576	CONTINUUM PLUS 1.2 940 CO OPAL D DALI EM B	✱
2064693	CONTINUUM PLUS 1.5 940 CO OPAL D DALI EM B	✱
2064725	CONTINUUM PLUS 1.8 940 CO OPAL D DALI EM B	✱
2064757	CONTINUUM PLUS 2.1 940 CO OPAL D DALI EM B	✱
2064577	CONTINUUM PLUS 2.4 940 CO OPAL D DALI EM B	✱
2064781	CONTINUUM PLUS 2.7 940 CO OPAL D DALI EM B	✱
2064813	CONTINUUM PLUS 3.0 940 CO OPAL D DALI EM B	✱
2064845	CONTINUUM PLUS 3.3 940 CO OPAL D DALI EM B	✱
2064877	CONTINUUM PLUS 3.6 940 CO OPAL D DALI EM B	✱
2064909	CONTINUUM PLUS 3.9 940 CO OPAL D DALI EM B	✱
2064941	CONTINUUM PLUS 4.2 940 CO OPAL D DALI EM B	✱
2064973	CONTINUUM PLUS 4.5 940 CO OPAL D DALI EM B	✱
2065070	CONTINUUM PLUS 4.8 940 CO OPAL D DALI EM B	✱
2064651	CONTINUUM PLUS 1.2 940 CO OPAL D SSA03 W	
2064652	CONTINUUM PLUS 1.2 940 CO OPAL D SSA03 B	
2064653	CONTINUUM PLUS 1.2 940 CO OPAL D SSA03 EM W	✱
2064654	CONTINUUM PLUS 1.2 940 CO OPAL D SSA03 EM B	✱

Continuous Opal Direct/Indirect

2064578	CONTINUUM PLUS 1.2 940 CO OPAL DI DALI W	
2064730	CONTINUUM PLUS 1.8 940 CO OPAL DI DALI W	
2064579	CONTINUUM PLUS 2.4 940 CO OPAL DI DALI W	
2064818	CONTINUUM PLUS 3.0 940 CO OPAL DI DALI W	
2064882	CONTINUUM PLUS 3.6 940 CO OPAL DI DALI W	
2064946	CONTINUUM PLUS 4.2 940 CO OPAL DI DALI W	
2065075	CONTINUUM PLUS 4.8 940 CO OPAL DI DALI W	
2064582	CONTINUUM PLUS 1.2 940 CO OPAL DI DALI B	
2064732	CONTINUUM PLUS 1.8 940 CO OPAL DI DALI B	
2064583	CONTINUUM PLUS 2.4 940 CO OPAL DI DALI B	
2064820	CONTINUUM PLUS 3.0 940 CO OPAL DI DALI B	
2064884	CONTINUUM PLUS 3.6 940 CO OPAL DI DALI B	
2064948	CONTINUUM PLUS 4.2 940 CO OPAL DI DALI B	
2065077	CONTINUUM PLUS 4.8 940 CO OPAL DI DALI B	
2064586	CONTINUUM PLUS 1.2 940 CO OPAL DI DALI EM W	✱
2064731	CONTINUUM PLUS 1.8 940 CO OPAL DI DALI EM W	✱
2064587	CONTINUUM PLUS 2.4 940 CO OPAL DI DALI EM W	✱
2064819	CONTINUUM PLUS 3.0 940 CO OPAL DI DALI EM W	✱
2064883	CONTINUUM PLUS 3.6 940 CO OPAL DI DALI EM W	✱
2064947	CONTINUUM PLUS 4.2 940 CO OPAL DI DALI EM W	✱
2065076	CONTINUUM PLUS 4.8 940 CO OPAL DI DALI EM W	✱
2064590	CONTINUUM PLUS 1.2 940 CO OPAL DI DALI EM B	✱
2064733	CONTINUUM PLUS 1.8 940 CO OPAL DI DALI EM B	✱
2064591	CONTINUUM PLUS 2.4 940 CO OPAL DI DALI EM B	✱

Continuous Opal Direct/Indirect

2064821	CONTINUUM PLUS 3.0 940 CO OPAL DI DALI EM B	✱
2064885	CONTINUUM PLUS 3.6 940 CO OPAL DI DALI EM B	✱
2064949	CONTINUUM PLUS 4.2 940 CO OPAL DI DALI EM B	✱
2065078	CONTINUUM PLUS 4.8 940 CO OPAL DI DALI EM B	✱
2064655	CONTINUUM PLUS 1.2 940 CO OPAL DI SSA03 W	
2064657	CONTINUUM PLUS 1.2 940 CO OPAL DI SSA03 B	
2064659	CONTINUUM PLUS 1.2 940 CO OPAL DI SSA03 EM W	✱
2064661	CONTINUUM PLUS 1.2 940 CO OPAL DI SSA03 EM B	✱

Continuous TRIM UGR Direct

2064508	CONTINUUM PLUS TR 0.6 940 CO UGR D DALI W	
2064674	CONTINUUM PLUS TR 0.9 940 CO UGR D DALI W	
2064509	CONTINUUM PLUS TR 1.2 940 CO UGR D DALI W	
2064694	CONTINUUM PLUS TR 1.5 940 CO UGR D DALI W	
2064734	CONTINUUM PLUS TR 1.8 940 CO UGR D DALI W	
2064758	CONTINUUM PLUS TR 2.1 940 CO UGR D DALI W	
2064510	CONTINUUM PLUS TR 2.4 940 CO UGR D DALI W	
2064782	CONTINUUM PLUS TR 2.7 940 CO UGR D DALI W	
2064822	CONTINUUM PLUS TR 3.0 940 CO UGR D DALI W	
2064846	CONTINUUM PLUS TR 3.3 940 CO UGR D DALI W	
2064886	CONTINUUM PLUS TR 3.6 940 CO UGR D DALI W	
2064910	CONTINUUM PLUS TR 3.9 940 CO UGR D DALI W	
2064950	CONTINUUM PLUS TR 4.2 940 CO UGR D DALI W	
2064974	CONTINUUM PLUS TR 4.5 940 CO UGR D DALI W	
2065079	CONTINUUM PLUS TR 4.8 940 CO UGR D DALI W	
2064511	CONTINUUM PLUS TR 0.6 940 CO UGR D DALI B	
2064675	CONTINUUM PLUS TR 0.9 940 CO UGR D DALI B	
2064512	CONTINUUM PLUS TR 1.2 940 CO UGR D DALI B	
2064696	CONTINUUM PLUS TR 1.5 940 CO UGR D DALI B	
2064736	CONTINUUM PLUS TR 1.8 940 CO UGR D DALI B	
2064760	CONTINUUM PLUS TR 2.1 940 CO UGR D DALI B	
2064513	CONTINUUM PLUS TR 2.4 940 CO UGR D DALI B	
2064784	CONTINUUM PLUS TR 2.7 940 CO UGR D DALI B	
2064824	CONTINUUM PLUS TR 3.0 940 CO UGR D DALI B	
2064848	CONTINUUM PLUS TR 3.3 940 CO UGR D DALI B	
2064888	CONTINUUM PLUS TR 3.6 940 CO UGR D DALI B	
2064912	CONTINUUM PLUS TR 3.9 940 CO UGR D DALI B	
2064952	CONTINUUM PLUS TR 4.2 940 CO UGR D DALI B	
2064976	CONTINUUM PLUS TR 4.5 940 CO UGR D DALI B	
2065081	CONTINUUM PLUS TR 4.8 940 CO UGR D DALI B	
2064514	CONTINUUM PLUS TR 1.2 940 CO UGR D DALI EM W	✱
2064695	CONTINUUM PLUS TR 1.5 940 CO UGR D DALI EM W	✱
2064735	CONTINUUM PLUS TR 1.8 940 CO UGR D DALI EM W	✱
2064759	CONTINUUM PLUS TR 2.1 940 CO UGR D DALI EM W	✱
2064515	CONTINUUM PLUS TR 2.4 940 CO UGR D DALI EM W	✱
2064783	CONTINUUM PLUS TR 2.7 940 CO UGR D DALI EM W	✱
2064823	CONTINUUM PLUS TR 3.0 940 CO UGR D DALI EM W	✱
2064847	CONTINUUM PLUS TR 3.3 940 CO UGR D DALI EM W	✱
2064887	CONTINUUM PLUS TR 3.6 940 CO UGR D DALI EM W	✱
2064911	CONTINUUM PLUS TR 3.9 940 CO UGR D DALI EM W	✱
2064951	CONTINUUM PLUS TR 4.2 940 CO UGR D DALI EM W	✱
2064975	CONTINUUM PLUS TR 4.5 940 CO UGR D DALI EM W	✱
2065080	CONTINUUM PLUS TR 4.8 940 CO UGR D DALI EM W	✱
2064516	CONTINUUM PLUS TR 1.2 940 CO UGR D DALI EM B	✱
2064697	CONTINUUM PLUS TR 1.5 940 CO UGR D DALI EM B	✱
2064737	CONTINUUM PLUS TR 1.8 940 CO UGR D DALI EM B	✱
2064761	CONTINUUM PLUS TR 2.1 940 CO UGR D DALI EM B	✱
2064517	CONTINUUM PLUS TR 2.4 940 CO UGR D DALI EM B	✱
2064785	CONTINUUM PLUS TR 2.7 940 CO UGR D DALI EM B	✱
2064825	CONTINUUM PLUS TR 3.0 940 CO UGR D DALI EM B	✱
2064849	CONTINUUM PLUS TR 3.3 940 CO UGR D DALI EM B	✱
2064889	CONTINUUM PLUS TR 3.6 940 CO UGR D DALI EM B	✱
2064913	CONTINUUM PLUS TR 3.9 940 CO UGR D DALI EM B	✱
2064953	CONTINUUM PLUS TR 4.2 940 CO UGR D DALI EM B	✱
2064977	CONTINUUM PLUS TR 4.5 940 CO UGR D DALI EM B	✱
2065082	CONTINUUM PLUS TR 4.8 940 CO UGR D DALI EM B	✱

Dimmable

SylSmart Connected
SylSmart Standalone

Continuous TRIM UGR Direct	
2064627	CONTINUUM PLUS TR 1.2 940 CO UGR D SSA03 W
2064628	CONTINUUM PLUS TR 1.2 940 CO UGR D SSA03 B
2064629	CONTINUUM PLUS TR 1.2 940 CO UGR D SSA03 EM W
2064630	CONTINUUM PLUS TR 1.2 940 CO UGR D SSA03 EM B

Continuous TRIM Opal Direct	
2064558	CONTINUUM PLUS TR 0.6 940 CO OPAL D DALI W
2064676	CONTINUUM PLUS TR 0.9 940 CO OPAL D DALI W
2064559	CONTINUUM PLUS TR 1.2 940 CO OPAL D DALI W
2064698	CONTINUUM PLUS TR 1.5 940 CO OPAL D DALI W
2064738	CONTINUUM PLUS TR 1.8 940 CO OPAL D DALI W
2064762	CONTINUUM PLUS TR 2.1 940 CO OPAL D DALI W
2064560	CONTINUUM PLUS TR 2.4 940 CO OPAL D DALI W
2064786	CONTINUUM PLUS TR 2.7 940 CO OPAL D DALI W
2064826	CONTINUUM PLUS TR 3.0 940 CO OPAL D DALI W
2064850	CONTINUUM PLUS TR 3.3 940 CO OPAL D DALI W
2064890	CONTINUUM PLUS TR 3.6 940 CO OPAL D DALI W
2064914	CONTINUUM PLUS TR 3.9 940 CO OPAL D DALI W
2064954	CONTINUUM PLUS TR 4.2 940 CO OPAL D DALI W
2064978	CONTINUUM PLUS TR 4.5 940 CO OPAL D DALI W
2065083	CONTINUUM PLUS TR 4.8 940 CO OPAL D DALI W
2064561	CONTINUUM PLUS TR 0.6 940 CO OPAL D DALI B
2064677	CONTINUUM PLUS TR 0.9 940 CO OPAL D DALI B
2064562	CONTINUUM PLUS TR 1.2 940 CO OPAL D DALI B
2064700	CONTINUUM PLUS TR 1.5 940 CO OPAL D DALI B
2064740	CONTINUUM PLUS TR 1.8 940 CO OPAL D DALI B
2064764	CONTINUUM PLUS TR 2.1 940 CO OPAL D DALI B
2064563	CONTINUUM PLUS TR 2.4 940 CO OPAL D DALI B
2064788	CONTINUUM PLUS TR 2.7 940 CO OPAL D DALI B
2064828	CONTINUUM PLUS TR 3.0 940 CO OPAL D DALI B
2064852	CONTINUUM PLUS TR 3.3 940 CO OPAL D DALI B
2064892	CONTINUUM PLUS TR 3.6 940 CO OPAL D DALI B
2064916	CONTINUUM PLUS TR 3.9 940 CO OPAL D DALI B
2064956	CONTINUUM PLUS TR 4.2 940 CO OPAL D DALI B
2064980	CONTINUUM PLUS TR 4.5 940 CO OPAL D DALI B
2065085	CONTINUUM PLUS TR 4.8 940 CO OPAL D DALI B
2064564	CONTINUUM PLUS TR 1.2 940 CO OPAL D DALI EM W
2064699	CONTINUUM PLUS TR 1.5 940 CO OPAL D DALI EM W
2064739	CONTINUUM PLUS TR 1.8 940 CO OPAL D DALI EM W
2064763	CONTINUUM PLUS TR 2.1 940 CO OPAL D DALI EM W
2064565	CONTINUUM PLUS TR 2.4 940 CO OPAL D DALI EM W
2064787	CONTINUUM PLUS TR 2.7 940 CO OPAL D DALI EM W
2064827	CONTINUUM PLUS TR 3.0 940 CO OPAL D DALI EM W
2064851	CONTINUUM PLUS TR 3.3 940 CO OPAL D DALI EM W
2064891	CONTINUUM PLUS TR 3.6 940 CO OPAL D DALI EM W
2064915	CONTINUUM PLUS TR 3.9 940 CO OPAL D DALI EM W
2064955	CONTINUUM PLUS TR 4.2 940 CO OPAL D DALI EM W
2064979	CONTINUUM PLUS TR 4.5 940 CO OPAL D DALI EM W
2065084	CONTINUUM PLUS TR 4.8 940 CO OPAL D DALI EM W
2064566	CONTINUUM PLUS TR 1.2 940 CO OPAL D DALI EM B
2064701	CONTINUUM PLUS TR 1.5 940 CO OPAL D DALI EM B
2064741	CONTINUUM PLUS TR 1.8 940 CO OPAL D DALI EM B
2064765	CONTINUUM PLUS TR 2.1 940 CO OPAL D DALI EM B
2064567	CONTINUUM PLUS TR 2.4 940 CO OPAL D DALI EM B
2064789	CONTINUUM PLUS TR 2.7 940 CO OPAL D DALI EM B
2064829	CONTINUUM PLUS TR 3.0 940 CO OPAL D DALI EM B
2064853	CONTINUUM PLUS TR 3.3 940 CO OPAL D DALI EM B
2064893	CONTINUUM PLUS TR 3.6 940 CO OPAL D DALI EM B
2064917	CONTINUUM PLUS TR 3.9 940 CO OPAL D DALI EM B
2064957	CONTINUUM PLUS TR 4.2 940 CO OPAL D DALI EM B
2064981	CONTINUUM PLUS TR 4.5 940 CO OPAL D DALI EM B
2065086	CONTINUUM PLUS TR 4.8 940 CO OPAL D DALI EM B
2064647	CONTINUUM PLUS TR 1.2 940 CO OPAL D SSA03 W
2064648	CONTINUUM PLUS TR 1.2 940 CO OPAL D SSA03 B
2064649	CONTINUUM PLUS TR 1.2 940 CO OPAL D SSA03 EM W
2064650	CONTINUUM PLUS TR 1.2 940 CO OPAL D SSA03 EM B

Corner accessories	
2064612	CONTINUUM PLUS L-COR 940 UGR D DALI W
2064613	CONTINUUM PLUS L-COR 940 UGR D DALI B
2064608	CONTINUUM PLUS L-COR 940 OPAL D DALI W
2064609	CONTINUUM PLUS L-COR 940 OPAL D DALI B
2064614	CONTINUUM PLUS TR L-COR 940 UGR D DALI W
2064615	CONTINUUM PLUS TR L-COR 940 UGR D DALI B
2064610	CONTINUUM PLUS TR L-COR 940 OPAL D DALI W
2064611	CONTINUUM PLUS TR L-COR 940 OPAL D DALI B

Other accessories	
2064603	CONTINUUM PLUS END CAP W
2064606	CONTINUUM PLUS END CAP B
2064594	CONTINUUM PLUS TRIM END CAP W
2064595	CONTINUUM PLUS TRIM END CAP B
2064607	CONTINUUM PLUS ROLLED DIFFUSER 10M UGR
2064605	CONTINUUM PLUS ROLLED DIFFUSER 10M OPAL
2064600	CONTINUUM PLUS COUPLER
2064601	CONTINUUM PLUS SUSPENSION KIT
2064604	CONTINUUM PLUS RECESSED BRACKET
2064663	CONTINUUM PLUS CEILING ROSE W
2064664	CONTINUUM PLUS CEILING ROSE B

Dimmable


SylSmart Connected
SylSmart Standalone

Optix Linear Recessed

Concord



Slim recessed LED module for individual or linear mounting. Very low luminance (L<600 cd/m²) and low glare (UGR<19), ideal for computer work and visual comfort in accordance with EN 12464-1. Polycarbonate and satin aluminum optics. Luminous efficacy up to 131 lm/W - CRI>80 or >90 - SDCM<3. Available in standard constant current or lighting management versions: Traditional wired, centralized: DALI and DALI DT8 / Wireless (Bluetooth), decentralized: SylSmart® Connected (SSA) with integrated sensor or SylSmart® Standalone (SSC) with optional remote detection. SylSmart® Connected continuous line: combine master versions (DALI SSA) with slave versions (DALI). Optix LumiNature®: version available Dimmable by standard wired switch (DALI versions) or wireless, battery-free piezoelectric switch (SylSmart® versions). Equipped with Linect 3P + DALI WAGO connector. Expected lifetime: 107,500 hrs (L80), except LumiNature®: 100,000 hrs (L70). 5-year warranty.



1200mm		
2023782	OPTIX LINEAR RECESSED 1200 3000K ALU	
2023783	OPTIX LINEAR RECESSED 1200 3000K ALU DALI	
2023784	OPTIX LINEAR RECESSED 1200 4000K ALU	
2023785	OPTIX LINEAR RECESSED 1200 4000K ALU DALI	
2023905	OPTIX LINEAR RECESSED 1200 4000K ALU DALI	
2023789	OPTIX LINEAR RECESSED 1200 4000K ALU SSC	
2023937	OPTIX LINEAR RECESSED 1200 4000K ALU SSA03	
2023912	OPTIX LINEAR RECESSED 1200 4000K ALU DALI SSA03	
2023787	OPTIX LINEAR RECESSED 1200 4000K ALU EM	
2023786	OPTIX LINEAR RECESSED 1200 4000K ALU DALI EM	
2023790	OPTIX LINEAR RECESSED 1200 4000K ALU SSC EM	
2023791	OPTIX LINEAR RECESSED 1200 4000K C9 ALU DALI	
2023792	OPTIX LINEAR RECESSED 1200 4000K C9 ALU DALI EM	

1200mm TW		
2023793	OPTIX LINEAR RECESSED 1200 TW ALU DALI	
2023795	OPTIX LINEAR RECESSED 1200 TW ALU SSC	
2023794	OPTIX LINEAR RECESSED 1200 TW ALU DALI EM	
2023796	OPTIX LINEAR RECESSED 1200 TW ALU SSC EM	

LumiNature		
2023847	OPTIX LINEAR RECESSED 1200 LUMI 4K ALU	
2023848	OPTIX LINEAR RECESSED 1200 LUMI 4K ALU DALI	
2023849	OPTIX LINEAR RECESSED 1200 LUMI 4K ALU SSC	
2023944	OPTIX LINEAR RECESSED 1200 LUMI 4K ALU SSA03	
2023850	OPTIX LINEAR RECESSED 1200 LUMI HCL TW ALU DA	
2023851	OPTIX LINEAR RECESSED 1200 LUMI HCL TW ALU SSC	

Accessories	
2021717	OPTIX LINEAR RECESSED ACCESSORY BRACKET 1-20MM X1
2021718	OPTIX LINEAR RECESSED ACCESSORY BRACKET 1-20MM X5
2021719	OPTIX LINEAR RECESSED ACCESSORY BRACKET 21-40MM X1
2021720	OPTIX LINEAR RECESSED ACCESSORY BRACKET 21-40MM X5
2021725	OPTIX LINEAR RECESSED ACCESSORY U SHAPE JOINER KIT
2021721	OPTIX LIN ACCESSORY THR WRE 3X1,5 1200MM
2021722	OPTIX LIN ACCESSORY THR WRE 4X1,5 1200MM
2021723	OPTIX LIN ACCESSORY THR WRE 3X1,5+2X0,5 1200MM
2021724	OPTIX LIN ACCESSORY THR WRE 2X0,5+2X0,5 1200MM
2021727	OPTIX LIN ACCESSORY THR WRE 3X1,5 1500MM
2021728	OPTIX LIN ACCESSORY THR WRE 4X1,5 1500MM
2021729	OPTIX LIN ACCESSORY THR WRE 3X1,5+2X0,5 1500MM

Dimmable


SylSmart Connected
SylSmart Standalone

Optix Linear Surface

Concord



Slim recessed LED module for individual or linear mounting. Very low luminance (L<600 cd/m²) and low glare (UGR<19), ideal for computer work and visual comfort in accordance with EN 12464-1. Polycarbonate and satin aluminum optics. Luminous efficacy up to 131 lm/W - CRI>80 or >90 - SDCM<3. Available in standard constant current or lighting management versions: Traditional wired, centralized: DALI and DALI DT8 / Wireless (Bluetooth), decentralized: SylSmart® Connected (SSA) with integrated sensor or SylSmart® Standalone (SSC) with optional remote detection. SylSmart® Connected continuous line: combine master versions (DALI SSA) with slave versions (DALI). Optix LumiNature®: version available Dimmable by standard wired switch (DALI versions) or wireless, battery-free piezoelectric switch (SylSmart® versions). Equipped with Linect 3P + DALI WAGO connector. Expected lifetime: 107,500 hrs (L80), except LumiNature®: 100,000 hrs (L70). 5-year warranty.



	1200mm Surface		
	2023797	OPTIX LINEAR SURFACE 1200 3000K ALU	
◬	2023798	OPTIX LINEAR SURFACE 1200 3000K ALU DALI	
◬	2023906	OPTIX LINEAR SURFACE 1200 3000K ALU DALI	
	2023799	OPTIX LINEAR SURFACE 1200 4000K ALU	
◬	2023800	OPTIX LINEAR SURFACE 1200 4000K ALU DALI	
◬	2023907	OPTIX LINEAR SURFACE 1200 4000K ALU DALI	
◬	2023804	OPTIX LINEAR SURFACE 1200 4000K ALU SSC	
◬	2023938	OPTIX LINEAR SURFACE 1200 4000K ALU SSA03	
◬	2023913	OPTIX LINEAR SURFACE 1200 4000K ALU DALI SSA03	
	2023802	OPTIX LINEAR SURFACE 1200 4000K ALU EM	
◬	2023801	OPTIX LINEAR SURFACE 1200 4000K ALU DALI EM	
◬	2023805	OPTIX LINEAR SURFACE 1200 4000K ALU SSC EM	
◬	2023806	OPTIX LINEAR SURFACE 1200 4000K C9 ALU DALI	
◬	2023807	OPTIX LINEAR SURFACE 1200 4000K C9 ALU DALI EM	

	1200mm Surface TW		
◬	2023823	OPTIX LINEAR SURFACE 1200 TW ALU DALI	
◬	2023825	OPTIX LINEAR SURFACE 1200 TW ALU SSC	
◬	2023824	OPTIX LINEAR SURFACE 1200 TW ALU DALI EM	
◬	2023826	OPTIX LINEAR SURFACE 1200 TW ALU SSC EM	

	LumiNature		
	2023852	OPTIX LINEAR SURFACE 1200 LUMI 4K ALU	
◬	2023854	OPTIX LINEAR SURFACE 1200 LUMI 4K ALU SSC	
◬	2023853	OPTIX LINEAR SURFACE 1200 LUMI 4K ALU DALI	
◬	2023945	OPTIX LINEAR SURFACE 1200 LUMI 4K ALU SSA03	
◬	2023855	OPTIX LINEAR SURFACE 1200 LUMI HCL TW ALU DALI	
◬	2023856	OPTIX LINEAR SURFACE 1200 LUMI HCL TW ALU SSC	

	1200mm Suspended Direct/Indirect		
	2023808	OPTIX LINEAR SURFACE 1200 D/I 3000K ALU	
◬	2023809	OPTIX LINEAR SURFACE 1200 D/I 3000K ALU DALI	
	2023810	OPTIX LINEAR SURFACE 1200 D/I 4000K ALU	
◬	2023811	OPTIX LINEAR SURFACE 1200 D/I 4000K ALU DALI	
◬	2023908	OPTIX LINEAR SURFACE 1200 D/I 4000K ALU DALI	
◬	2023815	OPTIX LINEAR SURFACE 1200 D/I 4000K ALU SSC	
◬	2023939	OPTIX LINEAR SURFACE 1200 D/I 4000K ALU SSA03	
◬	2023914	OPTIX LINEAR SURFACE 1200 D/I 4000K ALU DALI SSA03	
	2023813	OPTIX LINEAR SURFACE 1200 D/I 4000K ALU EM	
◬	2023812	OPTIX LINEAR SURFACE 1200 D/I 4000K ALU DALI EM	
◬	2023816	OPTIX LINEAR SURFACE 1200 D/I 4000K ALU SSC EM	
◬	2023817	OPTIX LINEAR SURFACE 1200 D/I 4000K C9 ALU DALI	
◬	2023818	OPTIX LINEAR SURFACE 1200 D/I 4000K C9 ALU DALI EM	

	1200mm Suspended Direct/Indirect TW		
◬	2023819	OPTIX LINEAR SURFACE 1200 D/I TW ALU DALI	
◬	2023821	OPTIX LINEAR SURFACE 1200 D/I TW ALU SSC	
◬	2023820	OPTIX LINEAR SURFACE 1200 D/I TW ALU DALI EM	
◬	2023822	OPTIX LINEAR SURFACE 1200 D/I TW ALU SSC EM	

	LumiNature		
	2023857	OPTIX LINEAR SURFACE 1200 DI LUMI 4K ALU	
◬	2023858	OPTIX LINEAR SURFACE 1200 DI LUMI 4K ALU DALI	
◬	2023859	OPTIX LINEAR SURFACE 1200 D/I LUMI 4K ALU SSC	
◬	2023946	OPTIX LINEAR SURFACE 1200 D/I LUMI 4K ALU SSA03	
◬	2023860	OPTIX LINEAR SURFACE 1200 DI LUMI HCL TW ALU DALI	
◬	2023861	OPTIX LINEAR SURFACE 1200 D/I LUMI HCL TW ALU SSC	

Accessories	
2021726	OPTIX LINEAR SURFACE & SUSPENDED PLASTIC JOINING KIT
5054686	UNIVERSAL SUSPENSION KIT 1.5M
5050568	RANA ACC FULL SUSP + POWER 3CORE SET 1W
5050571	RANA ACC FULL SUSP + POWER 5CORE SET 2W
5050574	RANA ACC FULL SUSP + POWER 3CORE SET 1T
5050577	RANA ACC FULL SUSP + POWER 5CORE SET 2T
5050604	RANA ACC CEILING ROSE
2021721	OPTIX LIN ACCESSORY THR WRE 3X1,5 1200MM
2021722	OPTIX LIN ACCESSORY THR WRE 4X1,5 1200MM
2021723	OPTIX LIN ACCESSORY THR WRE 3X1,5+2X0,5 1200MM
2021724	OPTIX LIN ACCESSORY THR WRE 2X0,5+2X0,5 1200MM
2021731	OPTIX LIN S INFILL 600MM
2021732	OPTIX LIN S INFILL 900MM

◬ Dimmable

SylSmart Connected
SylSmart Standalone


Rana Linear Recessed

SYLVANIA

PRO



Slim LED linear module for recessed mounting, for individual or continuous line installation. Luminous efficacy up to 120 lm/W - SDCM<3. Wide choice of optics: opal diffuser (OPAL), microprismatic optics (MPO) or prismatic + satin aluminum (Louv+Pri). Lighting management: Traditional wired DALI / Bluetooth: SylSmart® Connected (SSA) with integrated sensor or SylSmart® Standalone (SSC) with optional remote detection. SylSmart® Connected in continuous line: combine master versions (DALI SSA) with slave versions (DALI). Can be covered with glass wool or acoustic insulation. Dimmable by standard wired switch (DALI) or wireless, battery-free piezoelectric switch (SylSmart). Photobiological risk group: GR0. Expected lifetime: 60,000 hrs (L80). 5-year warranty.



Louvre + Prismatic Optic 3000K	
0052355	RANA LINEAR R 3KLM WW LOUV+PRI
0052356	RANA LINEAR R 3KLM WW LOUV+PRI D
0052357	RANA LINEAR R 3KLM WW LOUV+PRI 1-10
0045371	RANA LINEAR R 3KLM WW LOUV+PRI SSA03 WHITE
0045370	RANA LINEAR R 3KLM WW LOUV+PRI DALI SSA03 WHITE

Louvre + Prismatic Optic 4000K	
0052352	RANA LINEAR R 3KLM NW LOUV+PRI
0052353	RANA LINEAR R 3KLM NW LOUV+PRI D
0052354	RANA LINEAR R 3KLM NW LOUV+PRI 1-10
0052479	RANA LINEAR R 32 4K LOUV+PRI SSC01 W
0045373	RANA LINEAR R 3KLM NW LOUV+PRI SSA03 WHITE
0045372	RANA LINEAR R 3KLM NW LOUV+PRI DALI SSA03 WHITE
0052360	RANA LINEAR R 3KLM NW LOUV+PRI EM
0052361	RANA LINEAR R 3KLM NW LOUV+PRI D EMPRO
0052362	RANA LINEAR R 3KLM NW LOUV+PRI 1-10 EM

Louvre + Prismatic Optic TW	
0052485	RANA LINEAR R 3KLM TW LOUV+PRI SSC01 WHITE

Micro Prismatic Optic (MPO) 3000K	
0052343	RANA LINEAR R 3KLM WW MPO
0052344	RANA LINEAR R 3KLM WW MPO D
0052345	RANA LINEAR R 3KLM WW MPO 1-10
0045375	RANA LINEAR R 3KLM WW MPO SSA03 WHITE
0045374	RANA LINEAR R 3KLM WW MPO DALI SSA03 WHITE

Micro Prismatic Optic (MPO) 4000K	
0052340	RANA LINEAR R 3KLM NW MPO
0052341	RANA LINEAR R 3KLM NW MPO D
0052342	RANA LINEAR R 3KLM NW MPO 1-10
0052477	RANA LINEAR R 32 4K MPO SSC01 W
0045377	RANA LINEAR R 3KLM NW MPO SSA03 WHITE
0045376	RANA LINEAR R 3KLM NW MPO DALI SSA03 WHITE
0052348	RANA LINEAR R 3KLM NW MPO EM
0052349	RANA LINEAR R 3KLM NW MPO D EMPRO
0052350	RANA LINEAR R 3KLM NW MPO 1-10 EM

Opal Diffuser 3000K	
0052367	RANA LINEAR R 3KLM WW OPAL
0052368	RANA LINEAR R 3KLM WW OPAL D
0052369	RANA LINEAR R 3KLM WW OPAL 1-10
0045379	RANA LINEAR R 33 WW OPAL SSA03 WHITE
0045378	RANA LINEAR R 33 WW OPAL DALI SSA03 WHITE

Opal Diffuser 4000K	
0052364	RANA LINEAR R 3KLM NW OPAL
0052365	RANA LINEAR R 3KLM NW OPAL D
0052366	RANA LINEAR R 3KLM NW OPAL 1-10
0052481	RANA LINEAR R 32 4K OPAL SSC01 W
0045381	RANA LINEAR R 3KLM NW OPAL SSA03 WHITE
0045380	RANA LINEAR R 3KLM NW OPAL DALI SSA03 WHITE
0052372	RANA LINEAR R 3KLM NW OPAL EM
0052373	RANA LINEAR R 3KLM NW OPAL D EMPRO
0052374	RANA LINEAR R 3KLM NW OPAL 1-10 EM

Accessories	
0051301	RANA Linear R ACC BRACKET 1-20mm X 1
0051302	RANA Linear R ACC BRACKET 1-20mm X 5
0051303	RANA Linear R ACC BRACKET 21-40mm X 1
0051304	RANA Linear R ACC BRACKET 21-40mm X 5
0051297	RANA Linear ACC TW POWER 5 X 1.5 1350mm
0051288	RANA Linear ACC END ROW MASKING PLATE
0051300	RANA Linear ACC DIFFUSER PC 1700mm OPAL

Dimmable

SylSmart Connected
SylSmart Standalone


Rana Linear Surface

SYLVANIA

PRO

SylSmart

Slim, low-luminance LED linear module for individual or continuous line mounting. Slim (87 mm), elegant, and discreet design. Robust steel body. Supplied with two end caps. Luminous efficacy up to 120 lm/W - Color tolerance: SDCM<3. Wide choice of optics: opal diffuser (OPAL), microprismatic optics (MPO) or prismatic + satin aluminum (Louv+Pri). Lighting management: Traditional wired DALI / Bluetooth: SylSmart® Connected (SSA) with integrated cell or SylSmart® Standalone (SSC) with optional remote detection. SylSmart® Connected continuous line: combine master versions (DALI SSA) with slave versions (DALI). Dimmable by standard wired switch (DALI) or wireless, battery-free piezoelectric switch (SylSmart®). Photobiological risk group: GR0. Expected lifetime: 60,000 hrs (L80). 5-year warranty.



Louvre + Prismatic Optic 3000K	
0051265	RANA LINEAR S 3KLM WW LOUV+PRI
0051266	RANA LINEAR S 3KLM WW LOUV+PRI D
0051267	RANA LINEAR S 3KLM WW LOUV+PRI 1-10
0045383	RANA LINEAR S 3KLM WW LOUV+PRI SSA03 WHITE
0045382	RANA LINEAR S 3KLM WW LOUV+PRI DALI SSA03 WHITE

Louvre + Prismatic Optic 4000K		
0051263	RANA LINEAR S 3KLM NW LOUV+PRI D	
0051264	RANA LINEAR S 3KLM NW LOUV+PRI 1-10	
0045385	RANA LINEAR S 3KLM NW LOUV+PRI SSA03 WHITE	
0045384	RANA LINEAR S 3KLM NW LOUV+PRI DALI SSA03 WHITE	
0051271	RANA LINEAR S 3KLM NW LOUV+PRI D EMPRO	
0051272	RANA LINEAR S 3KLM NW LOUV+PRI 1-10 EM	

Louvre + Prismatic Optic TW	
0051345	RANA LINEAR S 3KLM TW LOUV+PRI SSC01 WHITE

Micro Prismatic Optic (MPO) 3000K	
0051253	RANA LINEAR S 3KLM WW MPO
0051254	RANA LINEAR S 3KLM WW MPO D
0051255	RANA LINEAR S 3KLM WW MPO 1-10
0045387	RANA LINEAR S 3KLM WW MPO SSA03 WHITE
0045386	RANA LINEAR S 3KLM WW MPO DALI SSA03 WHITE

Micro Prismatic Optic (MPO) 4000K		
0051250	RANA LINEAR S 3KLM NW MPO	
0051251	RANA LINEAR S 3KLM NW MPO D	
0051252	RANA LINEAR S 3KLM NW MPO 1-10	
0051339	RANA LINEAR S 32 4K MPO SSC01 W	
0045389	RANA LINEAR S 3KLM NW MPO SSA03 WHITE	
0045388	RANA LINEAR S 3KLM NW MPO DALI SSA03 WHITE	
0051259	RANA LINEAR S 3KLM NW MPO D EMPRO	
0051260	RANA LINEAR S 3KLM NW MPO 1-10 EM	

Opal Diffuser 3000K	
0051278	RANA LINEAR S 3KLM WW OPAL
0051279	RANA LINEAR S 3KLM WW OPAL D
0051280	RANA LINEAR S 3KLM WW OPAL 1-10
0045391	RANA LINEAR S 3KLM WW OPAL SSA03 WHITE
0045390	RANA LINEAR S 3KLM WW OPAL DALI SSA03 WHITE

Opal Diffuser 4000K		
0051275	RANA LINEAR S 3KLM NW OPAL	
0051276	RANA LINEAR S 3KLM NW OPAL D	
0051277	RANA LINEAR S 3KLM NW OPAL 1-10	
0051343	RANA LINEAR S 32 4K OPAL SSC01 W	
0045393	RANA LINEAR S 33 NW OPAL SSA03 WHITE	
0045392	RANA LINEAR S 33 NW OPAL DALI SSA03 WHITE	
0051283	RANA LINEAR S 3KLM NW OPAL EM	
0051284	RANA LINEAR S 3KLM NW OPAL D EMPRO	
0051285	RANA LINEAR S 3KLM NW OPAL 1-10 EM	

Accessories	
0051297	RANA Linear ACC TW POWER 5 X 1.5 1350mm
0051290	RANA Linear S ACC SUSP + POWER 3 X 1.5mm W
0051291	RANA Linear S ACC SUSP + POWER 3 X 1.5mm T
0051293	RANA Linear S ACC SUSP + POWER 5 X 1.5mm T
0051317	RANA Linear S ACC IN-LINE SUSP Y KIT + TW 5
0051318	RANA Linear S ACC IN-LINE SURF KIT + TW 3
0051319	RANA Linear S ACC IN-LINE SURF KIT + TW 5
0051288	RANA Linear ACC END ROW MASKING PLATE
0051300	RANA Linear ACC DIFFUSER PC 1700mm OPAL

Dimmable

SylSmart Connected
SylSmart Standalone

Otao Linear

SYLVANIA

PRO



Highly efficient modular linear range for office and retail applications. 2-CCT color temperature 3000/4000K CRI>80 and power (multi-power) adjustable via switch on top of the luminaire. Efficiency up to 145lm/W at 4000K. Non-dimmable and DALI versions available. Indirect lighting modules with magnetic mounting (70/30% D/I), available separately. Opal diffuser (UGR<25), prismatic diffuser + lens (UGR<19), lens combined with reflector in white/black/matt silver finish (UGR<19). Can be surface-mounted on ceilings and walls, suspended or recessed into ceilings. Various Plug&Play accessories: Non-dimmable self-testing emergency module and DALI addressable emergency module with LiFePO4 battery / SylSmart® Connected SSA03 sensor module / L, T and X connection unit with LED module and opal diffuser to create continuous lighting systems. Lifespan: 100,000 hrs (L80). 5-year warranty.



Opal Diffuser		
0041800	OTAO LINEAR 1.2 OPAL 830/840 MP WH	
0041801	OTAO LINEAR 1.2 OPAL 830/840 DALI WH	
0041832	OTAO LINEAR 1.5 OPAL 830/840 DALI WH	
0040800	OTAO LINEAR 1.2 OPAL 830/840 MP BK	
0040801	OTAO LINEAR 1.2 OPAL 830/840 DALI BK	
0040832	OTAO LINEAR 1.5 OPAL 830/840 DALI BK	

Prismatic Diffuser + Lens		
0041802	OTAO LINEAR 1.2 PRIS 830/840 MP WH	
0041803	OTAO LINEAR 1.2 PRIS 830/840 DALI WH	
0041833	OTAO LINEAR 1.5 PRIS 830/840 DALI WH	
0040802	OTAO LINEAR 1.2 PRIS 830/840 MP BK	
0040803	OTAO LINEAR 1.2 PRIS 830/840 DALI BK	
0040833	OTAO LINEAR 1.5 PRIS 830/840 DALI BK	



Reflector White		
0041804	OTAO LINEAR 1.2 REF WHT 830/840 MP WH	
0041805	OTAO LINEAR 1.2 REF WHT 830/840 DALI WH	
0040804	OTAO LINEAR 1.2 REF WHT 830/840 MP BK	
0040805	OTAO LINEAR 1.2 REF WHT 830/840 DALI BK	

Reflector Black		
0041823	OTAO LINEAR 1.2 REF BLK 830/840 MP WH	
0041824	OTAO LINEAR 1.2 REF BLK 830/840 DALI WH	

Reflector Black		
0041835	OTAO LINEAR 1.5 REF BLK 830/840 DALI WH	
0040823	OTAO LINEAR 1.2 REF BLK 830/840 MP BK	
0040824	OTAO LINEAR 1.2 REF BLK 830/840 DALI BK	

Reflector Silver		
0041825	OTAO LINEAR 1.2 REF SIL 830/840 MP WH	
0041826	OTAO LINEAR 1.2 REF SIL 830/840 DALI WH	
0040825	OTAO LINEAR 1.2 REF SIL 830/840 MP BK	
0040826	OTAO LINEAR 1.2 REF SIL 830/840 DALI BK	

Electrical Accessories		
0041809	OTAO LINEAR CORN-L OPAL 830/840 WH	
0041810	OTAO LINEAR CORN-T OPAL 830/840 WH	
0041811	OTAO LINEAR CORN-X OPAL 830/840 WH	
0040809	OTAO LINEAR CORN-L OPAL 830/840 BK	
0040810	OTAO LINEAR CORN-T OPAL 830/840 BK	
0040811	OTAO LINEAR CORN-X OPAL 830/840 BK	
0041812	OTAO LINEAR SSA03 MODULE WH	
0040812	OTAO LINEAR SSA03 MODULE BK	
0041827	OTAO LINEAR ST EM MODULE WH	
0040827	OTAO LINEAR ST EM MODULE BK	
0041822	OTAO LINEAR ST EMPRO MODULE WH	
0040822	OTAO LINEAR ST EMPRO MODULE BK	
0041818	OTAO LINEAR CEILING ROSE WH 5-PIN	
0041828	OTAO LINEAR CEILING ROSE WH 6-PIN	
0040818	OTAO LINEAR CEILING ROSE BK 5-PIN	
0040828	OTAO LINEAR CEILING ROSE BK 6-PIN	

Optical Accessories	
0041815	OTAO LINEAR INDIRECT MOD OPAL
0041813	OTAO LINEAR INDIRECT MOD PRIS
0041814	OTAO LINEAR INDIRECT MOD REF
0041806	OTAO LINEAR REF WHT 4PCS
0041807	OTAO LINEAR REF BLK 4PCS
0041808	OTAO LINEAR REF SIL 4PCS

Mechanical Accessories	
0041816	OTAO LINEAR WALL MOUNTING KIT
0041819	OTAO LINEAR SUSPENSION KIT
0041820	OTAO LINEAR FAST CONNECTOR
0041821	OTAO LINEAR OPAL ROLLED DIFF 30M
0041829	OTAO LINEAR RECESSED FRAME WH
0040829	OTAO LINEAR RECESSED FRAME BK
0040831	OTAO LINEAR 0.170 DUMMY BK
0041831	OTAO LINEAR 0.170 DUMMY WH
0041830	OTAO LINEAR 1.2 DUMMY + TW WH
0040830	OTAO LINEAR 1.2 DUMMY + TW BK

Dimmable

SylSmart Connected
SylSmart Standalone

SYLVANIA

Concord

LumiNature®
Natural light recreated

Bringing the sun indoors...
a new era in Human Centric Lighting.

Full spectrum of sunlight

Truest colours

Dynamic light control

- *Complete spectral curve natural light, without disturbing blue peak of conventional LEDs*
- *Rich and energising light that helps to regulate physiological responses for better concentration and health*
- *Excellent colour rendering, CRI 97+ in all colour temperatures*
- *100% adapted to the circadian rhythm, SylSmart® enabled dimmable, auto-adjusting tunable white light*
- *An innovation applied to best-in-class visual comfort in Optix, Solstice and Equinox*

Revolutionary, human-tailored light.
Designed for better living.



sylvania-group.com

Digital | Lighting | Solutions

Concord
by SYLVANIA Group



Equinox

MADE IN GERMANY

The new vision of downlight

- Inspirational halo effects regulated by a unique adjustable optic system
- Low glare (UGR<19)
- High efficiency 125lm/W, CRI 90-97

sylvania-group.com


Digital | Lighting | Solutions

Equinox

Concord



Concord Equinox revolutionizes downlighting with its sliding optics. Creates an inspiring halo effect. Uses the award-winning QuarkStar™ light refraction system. High color rendering index CRI>90 and CRI>97 for the LumiNature® version (Human Centric Lighting Tunable White), SDCM≤3. High visual comfort: UGR<19. DALI (push-dim compatible), SylSmart® Standalone and SylSmart® Connected models without sensor (SSA01D) available. 3000K, 4000K, and 2700K-6500K (HCL TW version). Finish: white (RAL9016) and black (RAL9005). Available in a version without a collar for installation in plaster ceilings. Lifespan: 114,000 hours (L80) and 77,000 hours (HCL TW version). 5-year warranty.

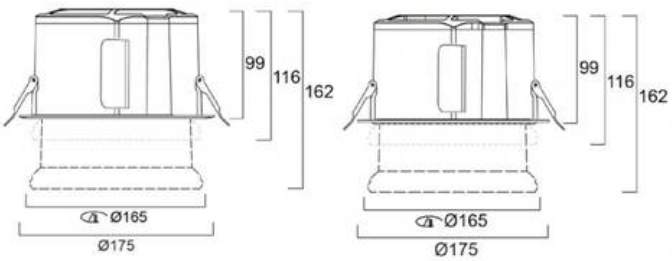

Equinox Trim	
2059948	Equinox 165 2300 930 DALI
2059949	Equinox 165 2500 940 DALI
2060588	Equinox 165 2100 930 DALI BLACK
2060589	Equinox 165 2300 940 DALI BLACK
2059934	Equinox 165 2300 930 SSA01D
2059935	Equinox 165 2500 940 SSA01D
2059936	Equinox 165 2300 930 SSC01D
2059937	Equinox 165 2500 940 SSC01D
2060590	Equinox 165 2100 930 SSC01D BLACK
2060591	Equinox 165 2300 940 SSC01D BLACK
2059953	Equinox 165 1975 LUMI HCL TW SSC01D
2059961	Equinox 165 1925 LUMI HCL TW SSC01D BLACK

Equinox Trimless	
2059954	Equinox 165 2300 Trimless 930 DALI
2059955	Equinox 165 2500 Trimless 940 DALI
2059938	Equinox 165 2300 Trimless 930 SSC01D
2059939	Equinox 165 2500 Trimless 940 SSC01D


Accessories	
0030490	Safety Cable 1.5M (X3)
0030448	IP65 empty box

Solstice

Concord



High efficiency and energy savings thanks to a custom-designed reflector system offering first-class performance - 141lm/W in IRC90 at an ambient temperature of 40°C. High visual comfort thanks to the deep, floating reflector design. UGR<19 for lumens below 2400lm with a beam angle of approximately 70 degrees and with a luminance level at 65 degrees below 300cd/m² for lumens< 2400lm and 1000cd/m² for lumens< 6050lm. Environmentally friendly design. Made from high-quality aluminum materials, which can be recycled almost 100% at the end of the product's life cycle. Variety of choices: Cutout sizes of 150mm, 200mm, and 250mm. Wide range of lumens from 1200lm to 6000lm. Two frame colors: white and black. Four reflector finishes: silver, gold, black, and white. More natural light - no blue light peak: LumiNature® with HCL Tunable White and CRI97 3000K/4000K is available in 150mm and 200mm. Lighting control: DALI (push-dim) as standard, SylSmart® Standalone - SSC, SylSmart® Connected without sensor - SSA01D. CRI90 as standard. Lifetime: 120,000 hrs (L80). 5-year warranty.



Solstice 150 Round	
2070131	Solstice 150 1200lm 930 DALI
2070132	Solstice 150 1300lm 940 DALI
2070133	Solstice 150 1900lm 930 DALI
2070134	Solstice 150 2000lm 940 DALI
2070139	Solstice 150 1900lm 930 SSC01D
2070140	Solstice 150 2000lm 940 SSC01D
2070418	Solstice 150 3000lm 930 DALI
2070419	Solstice 150 3100lm 940 DALI
2070135	Solstice 150 1000lm 930 DALI BB
2070136	Solstice 150 1050lm 940 DALI BB
2070390	Solstice 150 1000lm 930 SSC01D BB
2070391	Solstice 150 1050lm 940 SSC01D BB
2070137	Solstice 150 1800lm 930 DALI WW
2070138	Solstice 150 1850lm 940 DALI WW
2070394	Solstice 150 1800lm 930 SSC01D WW
2070395	Solstice 150 1850lm 940 SSC01D WW
2070227	Solstice 150 1250lm 930 DALI GB
2070228	Solstice 150 1300lm 940 DALI GB
2070235	Solstice 150 1250lm 930 SSC01D GB
2070236	Solstice 150 1300lm 940 SSC01D GB
2070231	Solstice 150 1900lm 930 DALI SB
2070232	Solstice 150 2000lm 940 DALI SB
2070239	Solstice 150 1900lm 930 SSC01D SB
2070240	Solstice 150 2000lm 940 SSC01D SB
2070414	Solstice 150 1800lm 930 DALI SemiMatt White
2070415	Solstice 150 1900lm 940 DALI SemiMatt White
2693852	Solstice 150 1900LM 930 SSA01D

Dimmable

SylSmart Connected
SylSmart Standalone

Concord

by SYLVANIA Group



Solstice

MADE IN GERMANY

Sustainability and high visual comfort

- High efficiency and energy saving, 141lm/W in CRI90
- High visual comfort UGR<19 for lumens lower than 2400lm
- Environmentally friendly design, almost 100% recyclable

sylvania-group.com


Digital | Lighting | Solutions

Solstice 150 Round

2693856	Solstice 150 2000LM 940 SSA01D

LumiNature

2070141	Solstice 150 1450lm LUMI 930 DALI
2070142	Solstice 150 1550lm LUMI 940 DALI
2070143	Solstice 150 1450lm LUMI 930 SSC01D
2070144	Solstice 150 1550lm LUMI 940 SSC01D
2070145	Solstice 150 Lumi HCL TW SSC01D




Solstice 200 Round

2070146	Solstice 200 2300lm 930 DALI
2070149	Solstice 200 2400lm 940 DALI
2070150	Solstice 200 4200lm 930 DALI
2070151	Solstice 200 4350lm 940 DALI
2070156	Solstice 200 2300lm 930 SSC01D
2070157	Solstice 200 2400lm 940 SSC01D
2070158	Solstice 200 2300lm 930 SSA01D
2070159	Solstice 200 2400lm 940 SSA01D
2070165	Solstice 200 5900lm 930 DALI
2070166	Solstice 200 6050lm 940 DALI
2070152	Solstice 200 1500lm 930 DALI BB
2070153	Solstice 200 1600lm 940 DALI BB
2070392	Solstice 200 1500lm 930 SSC01D BB
2070393	Solstice 200 1600lm 940 SSC01D BB
2070154	Solstice 200 2300lm 930 DALI WW
2070155	Solstice 200 2400lm 940 DALI WW
2070396	Solstice 200 2300lm 930 SSC01D WW
2070397	Solstice 200 2400lm 940 SSC01D WW
2070229	Solstice 200 1700lm 930 DALI GB
2070230	Solstice 200 1800lm 940 DALI GB
2070237	Solstice 200 1700lm 930 SSC01D GB
2070238	Solstice 200 1800lm 940 SSC01D GB
2070233	Solstice 200 2300lm 930 DALI SB
2070234	Solstice 200 2400lm 940 DALI SB
2070241	Solstice 200 2300lm 930 SSC01D SB
2070242	Solstice 200 2400lm 940 SSC01D SB
2070416	Solstice 200 2200lm 930 DALI SemiMatt White
2070417	Solstice 200 2300lm 940 DALI SemiMatt White


LumiNature

2070160	Solstice 200 1800lm LUMI 930 DALI
2070161	Solstice 200 1900lm LUMI 940 DALI
2070162	Solstice 200 1800lm LUMI 930 SSC01D
2070163	Solstice 200 1900lm LUMI 940 SSC01D
2070164	Solstice 200 Lumi HCL TW SSC01D




Solstice 250 Round

2070221	Solstice 250 2300lm 930 DALI
2070222	Solstice 250 2400lm 940 DALI
2070295	Solstice 250 2300lm 930 SSA01D
2070296	Solstice 250 2400lm 940 SSA01D




Solstice 200 Fixed Square

2070167	Solstice 200 2300lm 930 DALI Square
2070168	Solstice 200 2400lm 940 DALI Square




Solstice IP65 150

2070171	Solstice 150 IP65 1700lm 930 DALI
2070172	Solstice 150 IP65 1900lm 940 DALI



Solstice IP65 200

2070173	Solstice 200 IP65 2100lm 930 DALI
2070174	Solstice 200 IP65 2200lm 940 DALI





Solstice WallWasher

2070175	Solstice 150 1500lm 930 DALI Double Wall Washer
2070176	Solstice 150 1600lm 940 DALI Double Wall Washer

Dimmable


SylSmart Connected
SylSmart Standalone





Surface Mounted 150	
2070181	Solstice 150 1900lm 930 DALI Surface Mounted
2070182	Solstice 150 2000lm 940 DALI Surface Mounted
2070189	Solstice 150 1000lm 930 DALI Surface Mounted BB
2070190	Solstice 150 1050lm 940 DALI Surface Mounted BB
2070191	Solstice 150 1900lm 930 DALI Surface Mounted WW
2070192	Solstice 150 2000lm 940 DALI Surface Mounted WW
2070406	Solstice 150 1250lm 930 DALI Surface Mounted GB
2070407	Solstice 150 1300lm 940 DALI Surface Mounted GB
2070410	Solstice 150 1900lm 930 DALI Surface Mounted SB
2070411	Solstice 150 2000lm 940 DALI Surface Mounted SB

Solstice Pendant	
2070215	Solstice 200 3280 930 DALI Pendant Direct/Indirect
2070216	Solstice 200 3400 940 DALI Pendant Direct/Indirect
2070398	Solstice 200 2380 930 DALI Pendant Direct/Ind BB
2070399	Solstice 200 2500 940 DALI Pendant Direct/Ind BB
2070400	Solstice 200 3280 930 DALI Pendant Direct/Ind WW
2070401	Solstice 200 3400 940 DALI Pendant Direct/Ind WW
2070402	Solstice 200 2400 930 DALI Pendant Direct/Ind GB
2070403	Solstice 200 2800 940 DALI Pendant Direct/Ind GB
2070404	Solstice 200 2400 930 DALI Pendant Direct/Ind SB
2070405	Solstice 200 3400 940 DALI Pendant Direct/Ind SB



Solstice 150/200/250 Accessories	
0030461	Adapting Ring RAL9010 150/175/200
0030463	Adapting Ring RAL9010 205/225/250
0038001	Reinforcing Plate 150
0038003	Reinforcing Plate 205
0030490	Safety Cable 1.5M (X3)
0030448	IP65 empty box
2070219	Solstice Pendant Accessory White
2070220	Solstice Pendant Accessory Black

Surface Mounted 200		
2070193	Solstice 200 2150lm 930 DALI Surface Mounted	
2070194	Solstice 200 2250lm 940 DALI Surface Mounted	
2070412	Solstice 200 2150lm 930 DALI Surface Mounted SB	
2070413	Solstice 200 2250lm 940 DALI Surface Mounted SB	
2070195	Solstice 200 2150lm 930 DALI ST Surface Mounted	
2070196	Solstice 200 2250lm 940 DALI ST Surface Mounted	
2070197	Solstice 200 4000lm 930 DALI Surface Mounted	
2070198	Solstice 200 4100lm 940 DALI Surface Mounted	
2070201	Solstice 200 4000lm 930 DALI EM Surface Mounted	
2070202	Solstice 200 4100lm 940 DALI ST Surface Mounted	
2070203	Solstice 200 2150lm 930 SSC01D Surface Mounted	
2070204	Solstice 200 2250lm 940 SSC01D Surface Mounted	
2070205	Solstice 200 2150lm 930 SSA01D Surface Mounted	
2070206	Solstice 200 2250lm 940 SSA01D Surface Mounted	
2070211	Solstice 200 1500lm 930 DALI Surface Mounted BB	
2070212	Solstice 200 1600lm 940 DALI Surface Mounted BB	
2070213	Solstice 200 2050lm 930 DALI Surface Mounted WW	
2070214	Solstice 200 2150lm 940 DALI Surface Mounted WW	
2070408	Solstice 200 1700lm 930 DALI Surface Mounted GB	
2070409	Solstice 200 1800lm 940 DALI Surface Mounted GB	

LumiNature	
2070184	Solstice 150 Lumi HCL TW SSC01D Surface Mounted
2070185	Solstice 150 1350 LUMI 930 SSC01D Surface Mounted
2070186	Solstice 150 1450 LUMI 940 SSC01D Surface Mounted
2070208	Solstice 200 Lumi HCL TW SSC01D Surface Mounted
2070209	Solstice 200 1800 LUMI 930 SSC01D Surface Mounted
2070210	Solstice 200 1900 LUMI 940 SSC01D Surface Mounted

Dimmable

SylSmart Connected
SylSmart Standalone

Insaver


SYLVANIA

PRO


850°C EN 25 IK 07 SylSmart®




A wide range of downlights with a luminous flux of 620lm to 4950lm. Luminous efficacy up to 131 lm/W. 3000K and 4000K - SDCM≤3. Available in standard, DALI (push button compatible), PIR, SylSmart® Connected and SylSmart® Standalone versions. Recessed version IP65 and IP54. Surface-mounted version IP20. Uniform and comfortable light UGR<19 (up to 3050lm). Multi-power solution: luminous flux from 620lm to 4950lm. Lifetime: 90,000 hrs (L80). 5-year warranty.




Insaver 150	
0030500	Insaver UGR19 IP54 150 1150LM 830
0030501	Insaver UGR19 IP54 150 1200LM 840
0030572	Insaver UGR19 IP54 150 1150lm 830 DALI
0030573	Insaver UGR19 IP54 150 1150lm 840 DALI
0030529	Insaver UGR19 IP65 150 1200lm 840
0030620	Insaver UGR19 IP54 150 1150LM 830 SSA01D
0030621	Insaver UGR19 IP54 150 1200LM 840 SSA01D




Insaver 175	
0030502	Insaver UGR19 IP54 175 1650LM 830
0030503	Insaver UGR19 IP54 175 1700LM 840
0030574	Insaver UGR19 IP54 175 1650lm 830 DALI
0030575	Insaver UGR19 IP54 175 1700lm 840 DALI
0030622	Insaver UGR19 IP54 175 1650LM 830 SSA01D
0030623	Insaver UGR19 IP54 175 1700LM 840 SSA01D




Insaver 175 PIR	
0030518	Insaver UGR19 IP54 175 1150lm 830 PIR
0030519	Insaver UGR19 IP54 175 1200lm 840 PIR



Insaver 205	
0030550	Insaver UGR19 IP54 205 620-1950 830 Multi
0030551	Insaver UGR19 IP54 205 620-2050 840 Multi
0030504	Insaver UGR19 IP54 205 2350LM 830
0030505	Insaver UGR19 IP54 205 2500LM 840
0030576	Insaver UGR19 IP54 205 2350lm 830 DALI
0030577	Insaver UGR19 IP54 205 2400lm 840 DALI
0030531	Insaver UGR19 IP65 205 2500lm 840
0030478	Insaver UGR19 IP54 205 2350 830 SSC01D
0030479	Insaver UGR19 IP54 205 2500 840 SSC01D
0030488	Insaver UGR19 IP54 205 2350 830 SSA01D
0030489	Insaver UGR19 IP54 205 2500 840 SSA01D




Insaver 225	
0030548	Insaver UGR19 IP54 225 730-2350 830 Multi
0030549	Insaver UGR19 IP54 225 770-2500 840 Multi
0030506	Insaver UGR19 IP54 225 2950LM 830
0030507	Insaver UGR19 IP54 225 3050LM 840
0030508	Insaver IP54 225 4050- 4800LM 830 Multi
0030509	Insaver IP54 225 4150- 4950LM 840 Multi
0030578	Insaver IP54 225 4800lm 830 DALI
0030579	Insaver IP54 225 5200lm 840 DALI
0030624	Insaver UGR19 IP54 225 2950LM 830 SSA01D
0030625	Insaver UGR19 IP54 225 3050LM 840 SSA01D
0030533	Insaver IP65 225 4150- 4950LM 840 Multi




Insaver 200 Square	
0030512	Insaver UGR19 IP54 200 2350lm 830 Square
0030513	Insaver UGR19 IP54 200 2500lm 840 Square
0030581	Insaver UGR19 IP54 200 2400lm 840 DALI Square
0030626	Insaver UGR19 IP54 200 2350lm 830 Square SSA01D
0030627	Insaver UGR19 IP54 200 2500lm 840 Square SSA01D

Dimmable

SylSmart Connected
SylSmart Standalone



Insaver 165 Surface Mounted	
0030514	Insaver UGR19 165 1150lm 830 Surface Mounted
0030515	Insaver UGR19 165 1200lm 840 Surface Mounted



Insaver 220 Surface Mounted	
0030516	Insaver UGR19 220 2350lm 830 Surface Mounted
0030517	Insaver UGR19 220 2500lm 840 Surface Mounted

Accessories	
0030460	Adapting Ring RAL9010 90/120/145
0030461	Adapting Ring RAL9010 150/175/200
0030462	Adapting Ring RAL9010 175/225/250
0030463	Adapting Ring RAL9010 205/225/250
0030464	Adapting Ring RAL9010 225/255-270/280
0038001	Reinforcing Plate 150
0038002	Reinforcing Plate 175
0038003	Reinforcing Plate 205
0038004	Reinforcing Plate 225
0030490	Safety Cable 1.5M (X3)
0030448	IP65 empty box
3079401	Loop-in Loop-Out Wiring Box 3-WAY Accessory
0079402	Loop-In Loop-Out Wiring Box 5-Way 5 Pole accessory


Nexo

SYLVANIA


PRO



Nexo features a semi-matt reflector, an opal diffuser on top of the LED board and a sleek bezel. It offers reduced glare of UGR<19 up to 1500lm for 150mm and up to 4050lm for 205mm version, perfect for hospitality, offices, education areas and spaces where light comfort is needed. The range benefits from high efficacy: up to 132lm/W which brings even more energy savings while replacing the traditional lights or using them for new projects. Nexo is offered in multipower and DALI versions where you can adjust the power to your requirements. The range has a long lifespan (100,000hrs L70B50) and 5 year warranty, helping to reduce maintenance cost.



Nexo 150	
0030365	Nexo 150 IP54 800-2350lm 3CCT Multi
0030368	Nexo 150 IP54 1500-2350lm 3CCT DALI

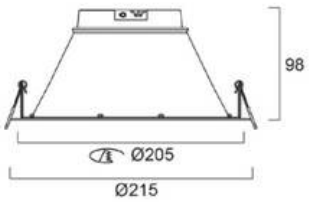

Nexo 205	
0030366	Nexo 205 IP54 825-2575lm 3CCT Multi
0030367	Nexo 205 IP54 3650-4250lm 3CCT Multi
0030369	Nexo 205 IP54 1600-4250lm 3CCT DALI

Dimmable

SylSmart Connected
SylSmart Standalone


Start Downlight IP54

SYLVANIA


START




Functional LED downlight up to 24W. Luminous efficacy up to 113 lm/W. Available in 3000K and 4000K versions - CRI80. Shallow recess depth (65mm max). SylSmart®, DALI, push-dim and phase dimming. SDCM<3. Quick-connect system (LiLo). Photobiological risk group: GR0. 5-year warranty.




90mm	
0030379	START Downlight 90 IP54 830Lm 830 DIM
0030380	START Downlight 90 IP54 880Lm 840 DIM




150mm	
0030324	START Downlight 150 IP54 1200lm 830
0030325	START Downlight 150 IP54 1250lm 840
0030590	START Downlight 150 IP54 1200Lm 830 DALI
0030591	START Downlight 150 IP54 1250Lm 840 DALI




175mm	
0030326	START Downlight 175 IP54 1550lm 830
0030327	START Downlight 175 IP54 1600lm 840
0030592	START Downlight 175 IP54 1550Lm 830 DALI
0030593	START Downlight 175 IP54 1600Lm 840 DALI



205mm	
0030328	START Downlight 205 IP54 2100lm 830
0030329	START Downlight 205 IP54 2150lm 840
0030594	START Downlight 205 IP54 2100Lm 830 DALI
0030595	START Downlight 205 IP54 2150Lm 840 DALI
0030375	START Downlight 205 IP54 2100LM 830 SSC01D
0030376	START Downlight 205 IP54 2150LM 840 SSC01D



225mm	
0030330	START Downlight 225 IP54 2350lm 830
0030331	START Downlight 225 IP54 2400lm 840
0030596	START Downlight 225 IP54 2350Lm 830 DALI
0030597	START Downlight 225 IP54 2400Lm 840 DALI



Surface mounted	
0030447	START Downlight 220 2150lm 840 Surface

Accessories	
0030460	Adapting Ring RAL9010 90/120/145
0030461	Adapting Ring RAL9010 150/175/200
0030462	Adapting Ring RAL9010 175/225/250
0030463	Adapting Ring RAL9010 205/225/250
0030464	Adapting Ring RAL9010 225/255-270/280
0038001	Reinforcing Plate 150
0038002	Reinforcing Plate 175
0038003	Reinforcing Plate 205
0038004	Reinforcing Plate 225
0030490	Safety Cable 1.5M (X3)
0030448	IP65 empty box

Dimmable


SylSmart Connected
SylSmart Standalone

START Downlight 5in1

SYLVANIA


START

Dimmable LED downlight with semi-recessed or surface mounting, with choice of color temperature (3000K, 4000K, or 6500K). Multi-diameter mounting system from 50 to 260mm. Available in PIR version (adjustable delay and minimum light level). CRI80. Black ring accessory (quarter-turn installation). Remote quick-connect and re-connectable connector (LiLo). Luminous efficacy: up to 100 lm/W and 127 lm/W for the PIR 2300 lm version. Photobiological risk group: GR0. Lifetime: 55,000 hours (L70). 3-year warranty.

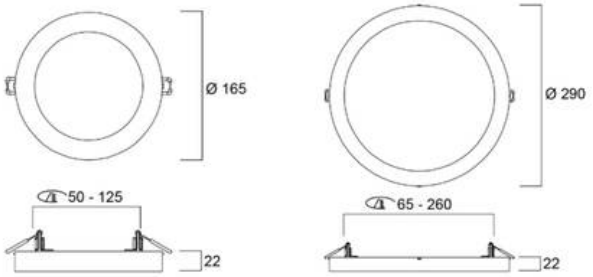

Dimmable 50-125	
0053071	START Downlight 5IN1 50-125 1150LM DIM

Dimmable 65-260	
0053073	START Downlight 5in1 65-260 1800LM DIM
0053074	START Downlight 5in1 65-260 2300LM DIM

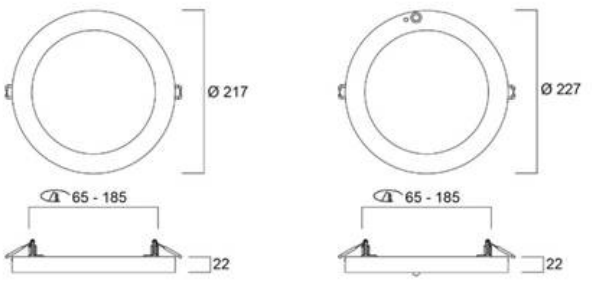

Dimmable 65-185	
0053072	START Downlight 5in1 65-185 1800LM DIM

PIR	
0053152	START Downlight 5in1 65-185 1800LM PIR
0053133	START Downlight 5in1 65-260 2600LM PIR


Accessories	
0053156	BLACK Bezel 176
0053157	BLACK Bezel 228
0053158	BLACK Bezel 301
0030490	Safety Cable 1.5M (X3)

START Downlight Flat Dim


SYLVANIA

START

Dimmable recessed LED downlight (phase dimming) between 12W and 24W. Luminous efficacy up to 103lm/W. Available in 3000K and 4000K - CRI80. Features LED peripheral lighting and an opal diffuser providing uniform light distribution. SDCM<3. Extra-flat (recessed versions): 21mm. Photobiological risk group: GR0. Remote quick-connect and re-connectable connector (LiLo). Plug & Play secondary connection. Lifetime: 78,000 hours (L70). 5-year warranty.



Recessed round 108	
0054118	START Downlight Flat 108 IP44 550LM 830 DIM
0054119	START Downlight Flat 108 IP44 600LM 840 DIM



Recessed round 157	
0054120	START Downlight Flat 157 IP44 1000LM 830 DIM
0054121	START Downlight Flat 157 IP44 1100LM 840 DIM

Dimmable


SylSmart Connected
SylSmart Standalone

START eco Downlight


SYLVANIA

START


Available in 8W, 12W, 15W, and 24W, in recessed or surface-mounted versions. Available in round or square shapes with integrated non-dimmable driver. 3000K and 4000K models - CRI80 available. SDCM<6. Slim design: recessed depth <38mm, surface mounting height: 45mm. Expected lifetime: 30,000 hrs (L70). Photobiological risk group: GR0. 3-year warranty.



Recessed round 205	
0054122	START Downlight Flat 205 IP44 1550LM 830 DIM
0054123	START Downlight Flat 205 IP44 1750LM 840 DIM
0054124	START Downlight Flat 205 IP44 2200LM 830 DIM
0054125	START Downlight Flat 205 IP44 2250LM 840 DIM




Recessed square	
0054126	START Downlight Flat 206 SQ IP44 1650LM 830 DIM
0054127	START Downlight Flat 206 SQ IP44 1700LM 840 DIM




Surface-mounted round	
0054128	START Downlight Flat 226 1700LM 830 DIM SM
0054129	START Downlight Flat 226 1750LM 840 DIM SM

Accessories	
0030461	Adapting Ring RAL9010 150/175/200
0030463	Adapting Ring RAL9010 205/225/250
0038001	Reinforcing Plate 150
0038003	Reinforcing Plate 205
0030448	IP65 empty box
0030490	Safety Cable 1.5M (X3)
0054147	START Downlight Flat 108 IP44 570-770lm 2CCT
0054148	START Downlight Flat 155 IP44 850-1150lm 2CCT
0054149	START Downlight Flat 205 IP44 1000-2150lm 2CCT




Recessed mounted 95mm	
0053910	START eco Downlight 95 640lm 830
0053914	START eco Downlight 95 640lm 840




Recessed mounted 145mm	
0055185	START eco Downlight 145 1100lm 830
0055188	START eco Downlight 145 1100lm 840

Dimmable

SylSmart Connected
SylSmart Standalone



Recessed mounted 195mm	
0055186	START eco Downlight 195 1600lm 830
0055187	START eco Downlight 195 2400lm 830
0055189	START eco Downlight 195 1600lm 840
0055190	START eco Downlight 195 2400lm 840
0055192	START eco Downlight 195 Square 1650lm 840



Surface mounted	
0055195	START eco Downlight 215 2400lm 830 Surface
0055198	START eco Downlight 215 2400lm 840 Surface
0055199	START eco Downlight 215 Square 1650lm 830 Surface
0055200	START eco Downlight 215 Square 1650lm 840 Surface


Accessories	
0030461	Adapting Ring RAL9010 150/175/200
0030463	Adapting Ring RAL9010 205/225/250
0038001	Reinforcing Plate 150
0038003	Reinforcing Plate 205
0030490	Safety Cable 1.5M (X3)

Solstice


Concord



High efficiency and energy savings thanks to a custom-designed reflector system offering first-class performance - up to 162lm/W in IRC90 at an ambient temperature of 35°C. High visual comfort thanks to the deep, floating reflector design. Beam angles of 42-72 degree. Environmentally friendly design. Made from high-quality aluminum materials, which can be recycled almost 100% at the end of the product's life cycle. Variety of choices: 2 body sizes - 68-72mm and 100mm (adpating rings for 76mm and 137mm). Wide range of lumens from 550lm to 1550lm. Two frame colors: white and black. Four reflector finishes: silver, gold, black, and white. Lighting control: phase dim, DALI (push-dim) as standard, SylSmart® Standalone - SSC, SylSmart® Connected without sensor - SSA01D. CRI90 as standard. 5-year warranty.



Solstice 68	
2060800	Solstice 68 1050lm 927 DIM
2060802	Solstice 68 1125lm 930 DIM
2060804	Solstice 68 1150lm 940 DIM
2060801	Solstice 68 1050lm 927 DALI
2060803	Solstice 68 1125lm 930 DALI
2060805	Solstice 68 1150lm 940 DALI
2060816	Solstice 68 1125lm 930 SSC01D
2060817	Solstice 68 1150lm 940 SSC01D
2060818	Solstice 68 1125lm 930 SSA01D
2060819	Solstice 68 1150lm 940 SSA01D
2060820	Solstice 68 545lm 930 DIM BB
2060821	Solstice 68 550lm 940 DIM BB
2060822	Solstice 68 950lm 930 DIM WW
2060823	Solstice 68 1000lm 940 DIM WW
2060824	Solstice 68 1030lm 930 DIM GB
2060825	Solstice 68 1040lm 940 DIM GB
2060826	Solstice 68 1125lm 930 DIM SB
2060827	Solstice 68 1150lm 940 DIM SB



Solstice 68 IP65	
2060812	Solstice 68 IP65 975lm 930 DIM
2060814	Solstice 68 IP65 1000lm 940 DIM
2060813	Solstice 68 IP65 975lm 930 DALI

Dimmable

SylSmart Connected
SylSmart Standalone

Concord

by SYLVANIA Group



NEW

Solstice

MADE IN GERMANY

Architectural spotlight


- High efficiency: up to 150lm/W
- Large variety of choice
- Customisable

sylvania-group.com

Digital | Lighting | Solutions


Solstice 68 IP65

2060815	Solstice 68 IP65 1000lm 940 DALI




Solstice 68 Trimless

2060867	Solstice 68 1125lm 930 DIM Trimless
2060868	Solstice 68 1150lm 940 DIM Trimless




Solstice 68 Square

2060828	Solstice 68 950lm 930 DIM Square
2060830	Solstice 68 1010lm 940 DIM Square
2060829	Solstice 68 950lm 930 DALI Square
2060831	Solstice 68 1010lm 940 DALI Square




Solstice 100

2060848	Solstice 100 1525lm 930 DIM
2060850	Solstice 100 1550lm 940 DIM
2060849	Solstice 100 1525lm 930 DALI
2060851	Solstice 100 1550lm 940 DALI
2060852	Solstice 100 1525lm 930 SSC01D
2060853	Solstice 100 1550lm 940 SSC01D
2060854	Solstice 100 1525lm 930 SSA01D
2060855	Solstice 100 1500lm 940 SSA01D
2060856	Solstice 100 800lm 930 DIM BB
2060857	Solstice 100 805lm 940 DIM BB
2060858	Solstice 100 1450lm 930 DIM WW
2060859	Solstice 100 1475lm 940 DIM WW
2060860	Solstice 100 1450lm 930 DIM GB
2060861	Solstice 100 1465lm 940 DIM GB
2060862	Solstice 100 1525lm 930 DIM SB
2060863	Solstice 100 1550lm 940 DIM SB



Solstice 100 Adjustable

2060832	Solstice 100 1500lm 930 DIM Adjustable WW
2060834	Solstice 100 1535lm 940 DIM Adjustable WW
2060833	Solstice 100 1500lm 930 DALI Adjustable WW
2060835	Solstice 100 1535lm 940 DALI Adjustable WW
2060840	Solstice 100 1375lm 930 DIM Adjustable BB
2060842	Solstice 100 1400lm 940 DIM Adjustable BB
2060841	Solstice 100 1375lm 930 DALI Adjustable BB
2060843	Solstice 100 1400lm 940 DALI Adjustable BB
2060844	Solstice 100 1480lm 930 SSC01D Adjustable WW
2060845	Solstice 100 1535lm 940 SSC01D Adjustable WW
2060846	Solstice 100 1480lm 930 SSA01D Adjustable WW
2060847	Solstice 100 1535lm 940 SSA01D Adjustable WW



Solstice 100 Trimlesss

2060869	Solstice 100 1525lm 930 DIM Trimless
2060870	Solstice 100 1550lm 940 DIM Trimless

Accessories

2060864	Solstice 68/76 Adapting Ring WHITE
2060865	Solstice 68/76 Adapting Ring BLACK

Dimmable

SylSmart Connected
SylSmart Standalone

Concord
by SYLVANIA Group



NEW

Domino

Linear spotlights with high visual comfort

- DALI versions
- Vertically tiltable: 40°
- CRI90 for better colour rendering and SDCM ≤3 for perfect light quality

sylvania-group.com

Digital | Lighting | Solutions

SYLVANIA



NEW

Signo

Tiltable & rotatable spotlight

- 60° tilt and 350° rotation
- Up to 3800lm and 110lm/W
- CRI90 for better colour rendering and SDCM ≤3 for perfect light quality

sylvania-group.com


Digital | Lighting | Solutions

Domino


Concord



Domino linear slim spotlights with single reflector and lens are ideal for architectural installations in retail stores, hotels and restaurant, offering high visual comfort. The high-definition optics are made of metallised thermoplastic material with matt finish, combined with lens to optimise the luminous output. The wide 55° beam angle lenses provide precise light distribution and create high contrast without shadows. Compact modular system offers 2 length of 2 and 5 heads with black reflectors and white bezels. Adjustable vertical: 40 degrees. Black reflector and white bezel version. DALI version. Efficiency up to 67lm/W. Lumen output- 2 heads 370lm and 5 heads-1000lm. 3000K and 4000K. CRI90 for better colour rendering and SDCM ≤3 for perfect light quality. Lifespan 100.000hrs (L70). 5 years warranty.



Domino 2x	
2061572	DOMINO 2X 930 DALI
2061573	DOMINO 2X 940 DALI



Domino 5x	
2061574	DOMINO 5X 930 DALI
2061575	DOMINO 5X 940 DALI


Signo

SYLVANIA

PRO



Ideal solution for display lighting within retail applications. High visual comfort, UGR<16, ultra-low glare. High-definition optics made of metallized thermoplastic material with matt finish, combined with lens to optimize the luminous output. Adjustable recessed 'elbow' downlight perfect for retail applications . Unique friction system inside the housing for optimal adjustment . 60° tilt and 350° rotation . High Output LED version with up to 3800lm for 4,000K version, achieving up to to 110lm/W . Multipower and DALI versions with lumen output from 750 to 3800lm for 4,000K. CRI90 for better colour rendering and SDCM ≤3 for perfect light quality. Choice of 3,000K (Warm white) or 4,000K (Neutral white). Complete die cast aluminium housing providing excellent thermal management and high efficacy. 152mm cut out. Loop in out function for both versions. Product finish RAL 9003 - Signal white. Lifespan: 100.000hrs (L70). 5 years waranty.



Signo	
0060533	Signo 152 3600LM 930 DALI
0060534	Signo 152 3800LM 940 DALI
0060589	Signo 152 3600LM 930 Multi
0060590	Signo 152 3800LM 940 Multi

Accessories	
0030490	Safety Cable 1.5M (X3)

Dimmable

SylSmart Connected
SylSmart Standalone


Ludospot 111

SYLVANIA

PRO



Modular LED recessed accent spotlight: module with a housing suitable for creating the desired ambiance. Available in 111mm diameter. Quick and easy installation thanks to the quarter-turn system. IP44 possible by choosing the appropriate accessory. Available in 3000K and 4000K versions - CRI90 - SDCM<3. Beam angle 38°. Luminous flux up to 3550 lm and luminous efficacy up to 93 lm/W. Quick and reusable remote connector (LiLo). Photobiological risk group: GR1. Lifetime: 50,000 hours (L70). 5-year warranty.



Ludospot 111	
0005333	Ludospot 111 3500LM 930 MB

Ludospot 111 Accessories	
0005336	Ludospot 111 Housing Round 145MM TILT WHT
0005335	Ludospot 111 Housing Round 135MM FIX IP44 WHT
0005337	Ludospot 111 Housing Round 180MM Cardan WHT
0005338	Ludospot 111 Housing Square 180MM Cardan WHT
0005339	Ludospot 111 Housing Square RECT X1 Cardan WHT
0005340	Ludospot 111 Housing Square RECT X2 Cardan WHT
0005307	Ludospot 50 Housing Round 90MM Fixed IP44 WHT
0030490	Safety Cable 1.5M (X3)


Obico

SYLVANIA


PRO



Waterproof LED accent spotlight. Airtight and can be covered with rolled or sprayed insulation. 3-CCT: 2700K, 3000K, and 4000K (Obico 68mm) and 2-CCT 3000K and 4000K (Obico 80mm) - IRC90. 38° beam angle. 360° adjustable. Standard dimmable phase. Thanks to the plug connection between the driver and the luminaire, the driver can be connected in advance, allowing the luminaire to be installed dust-free afterwards. LiLo housing for quick installation. Photobiological risk group: GR1. Expected lifetime: 100,000 hrs (L70). 5-year warranty.



Obico 68	
0005363	Obico 68 IP65 550lm 3CCT DIM ADJ WHITE
0005364	Obico 68 IP65 530lm 3CCT DIM ADJ BLACK
0005365	Obico 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME



Obico 65-72	
0059832	Obico 65-72 IP65 4CCT DIM FIX Fire White

Accessories	
0059833	Obico 65-72 FIX Bezel Fire Black
0030490	Safety Cable 1.5M (X3)

Dimmable

SylSmart Connected
SylSmart Standalone


Tucana

SYLVANIA

PRO



Adjustable spotlight with modern look and design providing multiple options in a single luminaire .Light output up to 900lm (4000K white), efficiency up to 105lm/W.Comes with DALI/ Switch dim driver and Loop in- out box for easy of installation. Three selectable colours 2700K-3000K-4000K. Beam angle of 40° . Adjustable with 25° twist. IP44 from the front . Round version with 68mm cut out in white and black colour. High Colour rendering of CRI>90, SDCM<3. Compatible with EM kit with easy plug and play system thanks to 2 pin connectors.Lifespan : 100,000hrs at L70B50.



Tucana	
0005214	Tucana IP44 900LM 3CCT DALI WHT
0005224	Tucana IP44 825LM 3CCT DALI BLK


Start Spot Alu

SYLVANIA


START



IP44 and IP65 recessed LED spotlight with a modern design and comfortable lighting. Adjustable IP44 and fixed IP65 versions. Additional reflectors in white, black and gold can be ordered as accessories for the IP44 version. Phase dimmable, separate driver with LiLo housing. White ring/white reflector and black ring/black reflector adjustable +/- 30° for the IP44 version and white ring/ white reflector for the fixed IP65 version. Luminous flux up to 870lm (4000K), efficiency up to 100lm/W. 3-CCT version with a choice of 2700K, 3000K and 4000K. Lifetime: 100,000 hrs (L70). 5-year warranty.



START Spot Alu IP44	
0005184	START Spot Alu IP44 DIM 870LM 3CCT WHT
0005186	START Spot Alu IP44 DIM 760LM 3CCT BLK



START Spot Alu IP65	
0005187	START Spot Alu IP65 DIM 870LM 3CCT WHT
0005193	START Spot Alu IP65 DIM 760LM 3CCT BLK

START Spot Alu Accessories	
0005593	START Spot Alu Reflector WHITE x3
0005594	START Spot Alu Reflector BLACK x3
0005596	START Spot Alu Reflector GOLD x3
0030490	Safety Cable 1.5M (X3)

Dimmable

SylSmart Connected
SylSmart Standalone

SYLVANIA



NEW

START™ Spot PIR

Maximising energy savings with PIR sensor spotlight

- Integrated PIR sensor with 30s-3min time, day-night lux and 0.1-2m sensitivity setting
- 2 light outputs 670lm or 1050lm
- 3 selectable colour options: 2700K, 3000K, 4000K

sylvania-group.com

Digital | Lighting | Solutions


Start Spot PIR

SYLVANIA


START



Recessed spotlight with integrated PIR sensor with settings for time (30s-3min), lux (day-night) and sensitivity (0.1-2m). Switch on the driver to select the light output - 670lm or 1050lm, with an efficiency of up to 105lm/W. 3-CCT: 2700K, 3000K and 4000K. The magnetic ring allows easy access to the switch to select the colour temperature and PIR sensor settings. Additional non-PIR rings available as accessories (the PIR ring can be replaced with a non-PIR edge if required). PIR sensor with master-slave function. Ultra-low profile suitable for shallow ceilings (max. 37.8mm). Wide beam angle of 50°. Lifetime: 90,000 hrs (L70). 5-year warranty.



START Spot PIR	
0005191	START Spot IP65 PIR 670-1050LM 3CCT WHT
0005192	START Spot IP65 PIR 670-1050LM 3CCT BLK



START Spot non-PIR	
0005244	START Spot IP65 670-1050LM 3CCT WHT

START Spot PIR Accessories	
0005584	START Spot Non PIR Bezel BLK
0005582	START Spot PIR Bezel BLK
0030490	Safety Cable 1.5M (X3)


Start Spot

SYLVANIA


START



Recessed LED accent spotlight between 4.8W and 7W, thickness 47mm with integrated driver (except bathroom version). Recessed diameter allowing direct replacement of most halogen spotlights. Luminous flux up to 630 lm - Luminous efficacy up to 104 lm/W. 3 colour temperatures 2700/3000/4000K (bathroom version: 3000/4000/6500K) - CRI80. IP44 version adjustable to 30° with single lens and 38° beam angle. IP65 fixed version with frosted lens, 100° beam angle. Black or silver clip-on collars available as accessories. Quick-connect system (LiLo). Photobiological risk group: GR1 (IP44), GR0 (IP65). Expected lifetime: 57,000 hrs (L70) for IP44 versions, 68,000 hrs (L70) for IP65 versions.
3-year warranty.



START Spot IP44	
0005564	START Spot 550lm 3CCT IP44 WH
0005509	START Spot 550lm 3CCT DIM IP44 WH



START Spot IP65	
0005565	START Spot 610lm 3CCT IP65 WH
0005510	START Spot 620lm 3CCT DIM IP65 WH
0005566	START Spot 500LM IP65 SUNDIM WHT

START Spot Accessories	
0005586	START Spot Bezel Silver 3x
0005587	START Spot Bezel Black 3x
0030490	Safety Cable 1.5M (X3)

Dimmable

SylSmart Connected
SylSmart Standalone


Inset

SYLVANIA


PRO




Inset is a range of different finishes for GU10 LED and GX 5.3 lamp housings, now in professional Sylvania packaging. It is ideal for lighting applications in the hospitality sector, such as reception areas, lounges and dining rooms. The range includes round and square models.




Inset Trend Flush IP23/IP20	
0083550	Inset Trend 62 FL WH NO-LMP
0083560	Inset Trend 62 FL BN NO-LMP




Inset Trend 75 Swing IP23/IP20	
0083500	Inset Trend 75 SW WH NO-LMP
0083510	Inset Trend 75 SW BN NO-LMP
0083530	Inset Trend 75 SW CH NO-LMP
0084101	Inset Trend 75 SW BLK NO-LMP




Inset Trend 75 Swing IP44/IP20 Indoor	
0084060	Inset Trend 75 SW IP44 WH NO-LMP
0084061	Inset Trend 75 SW IP44 BA NO-LMP
0084102	Inset Trend 75 SW IP44 BLK NO-LMP




Inset Trend 75 Swing IP44/IP20 Outdoor	
0084030	Inset Trend 75 SW IP44 OUTDOOR WH NO-LMP
0099390	Inset Trend 75 SW IP44 OUTDOOR AN NO-LMP



Inset Trend 75 Square IP44/IP20	
0084103	Inset Trend 75 SW SQ IP44 BLK NO-LMP
0084104	Inset Trend 75 SW SQ IP44 WH NO-LMP
0084105	Inset Trend 75 SW SQ IP44 BA NO-LMP



Instar Trend 75 Swing IP44/IP20	
0079060	Instar Trend 75 SW IP44 WH NO-LMP
0079061	Instar Trend 75 SW IP44 BA No-LMP
3084104	Inset TR SW SQ IP44 INDOOR WH EX-LMP
3084105	Inset TR SW SQ IP44 INDOOR BA EX-LMP



Inset Trend 72	
0084106	Inset Trend 72 FL Fire White NO-LMP
0084107	Inset Trend 72 FL IP65 Fire White NO-LMP
0084108	Inset Trend 72 FL Fire Bezel Black 3x
0084109	Inset Trend 72 FL IP65 Fire Bezel BLK 3x
0084110	Inset Trend 72 SW Fire White NO-LMP

Dimmable


SylSmart Connected
SylSmart Standalone

Solstice


Concord



Solstice surface-mounted luminaires come in 145mm and 196mm diameter, featuring a high-quality die-cast aluminum body and an injection-molded top hat. The 196mm version is also available with an emergency option with a discreet side LED indicator. Can be converted to pendant with white or black kits. The range delivers up to 4000 lm, colour temperatures of 3000K and 4000K, with Luminature versions offering 2700-6500K. All versions can be controlled with either DALI or SylSmart® drivers. Installation is via the common injection-molded top hat, which also serves as a "window" for wireless signal with available SylSmart® Connected, SylSmart® Standalone options. Lifetime : 89.000 hrs (L80). 5 years warranty.



Solstice 150 Surface Mount	
2070181	Solstice 150 1900lm 930 DALI Surface Mounted
2070182	Solstice 150 2000lm 940 DALI Surface Mounted
2070184	Solstice 150 Lumi HCL TW SSC01D Surface Mounted
2070185	Solstice 150 1350 LUMI 930 SSC01D Surface Mounted
2070186	Solstice 150 1450 LUMI 940 SSC01D Surface Mounted
2070191	Solstice 150 1900lm 930 DALI Surface Mounted WW
2070192	Solstice 150 2000lm 940 DALI Surface Mounted WW
2070189	Solstice 150 1000lm 930 DALI Surface Mounted BB
2070190	Solstice 150 1050lm 940 DALI Surface Mounted BB
2070406	Solstice 150 1250lm 930 DALI Surface Mounted GB
2070407	Solstice 150 1300lm 940 DALI Surface Mounted GB
2070410	Solstice 150 1900lm 930 DALI Surface Mounted SB
2070411	Solstice 150 2000lm 940 DALI Surface Mounted SB

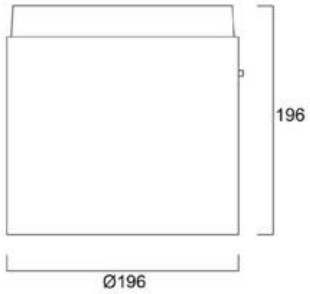

Solstice 200 Surface Mount		
2070193	Solstice 200 2150lm 930 DALI Surface Mounted	
2070194	Solstice 200 2250lm 940 DALI Surface Mounted	
2070195	Solstice 200 2150lm 930 DALI ST Surface Mounted	ST
2070196	Solstice 200 2250lm 940 DALI ST Surface Mounted	ST
2070197	Solstice 200 4000lm 930 DALI Surface Mounted	
2070198	Solstice 200 4100lm 940 DALI Surface Mounted	
2070201	Solstice 200 4000lm 930 DALI EM Surface Mounted	ST
2070202	Solstice 200 4100lm 940 DALI ST Surface Mounted	ST
2070203	Solstice 200 2150lm 930 SSC01D Surface Mounted	
2070204	Solstice 200 2250lm 940 SSC01D Surface Mounted	
2070205	Solstice 200 2150lm 930 SSA01D Surface Mounted	
2070206	Solstice 200 2250lm 940 SSA01D Surface Mounted	
2070208	Solstice 200 Lumi HCL TW SSC01D Surface Mounted	
2070209	Solstice 200 1800 LUMI 930 SSC01D Surface Mounted	
2070210	Solstice 200 1900 LUMI 940 SSC01D Surface Mounted	
2070213	Solstice 200 2050lm 930 DALI Surface Mounted WW	
2070214	Solstice 200 2150lm 940 DALI Surface Mounted WW	
2070211	Solstice 200 1500lm 930 DALI Surface Mounted BB	
2070212	Solstice 200 1600lm 940 DALI Surface Mounted BB	
2070408	Solstice 200 1700lm 930 DALI Surface Mounted GB	
2070409	Solstice 200 1800lm 940 DALI Surface Mounted GB	
2070412	Solstice 200 2150lm 930 DALI Surface Mounted SB	
2070413	Solstice 200 2250lm 940 DALI Surface Mounted SB	

Dimmable

SylSmart Connected
SylSmart Standalone

Giotto


SYLVANIA

PRO




High-performance IP44 LED light well, available in three different housing sizes: 235 mm, 305 mm and 335 mm. The product range includes a MicroWave version, which gives users greater control over the lighting. Giotto Microwave is available in 305mm and 335mm sizes and can be used with multiple 'slave' luminaires controlled by a 'master' luminaire. Luminous flux up to 2350lm - Luminous efficacy up to 116lm/W. Curved opaque diffuser (opal) for uniform light distribution. DALI and 1-10V versions. CRI80 - SDCM<3. Integrated LiLo housing for quick connection and looping. Photobiological risk group: GR0. Expected lifetime: 120,000 hrs (L70).

Giotto 235 recessed

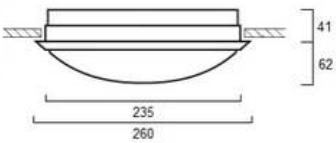


Giotto 235 Recessed	
3034751	GIOTTO 235 3000K RECESSED
3034750	GIOTTO 235 4000K RECESSED
3034755	GIOTTO 235 3000K RECESSED 1-10V
3034754	GIOTTO 235 4000K RECESSED 1-10V
3034759	GIOTTO 235 3000K RECESSED DALI
3034758	GIOTTO 235 4000K RECESSED DALI

Giotto 235 surface mounted

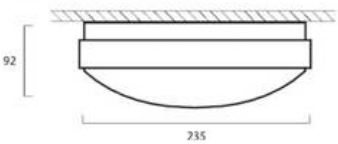

Giotto 235 Surface	
3034753	GIOTTO 235 3000K SURFACE
3034752	GIOTTO 235 4000K SURFACE
3034757	GIOTTO 235 3000K SURFACE 1-10V
3034756	GIOTTO 235 4000K SURFACE 1-10V
3034761	GIOTTO 235 3000K SURFACE DALI
3034760	GIOTTO 235 4000K SURFACE DALI


Giotto 305 recessed



Giotto 305 Recessed	
3034763	GIOTTO 305 3000K RECESSED
3034771	GIOTTO 305 3000K RECESSED DALI
3034762	GIOTTO 305 4000K RECESSED
3034767	GIOTTO 305 3000K RECESSED 1-10V
3034766	GIOTTO 305 4000K RECESSED 1-10V


Giotto 305 Recessed		
3034770	GIOTTO 305 4000K RECESSED DALI	
3034775	GIOTTO 305 3000K RECESSED MW SENSOR	
3034774	GIOTTO 305 4000K RECESSED MW SENSOR	
3034779	GIOTTO 305 3000K RECESSED 1-10V MW SENSOR	
3034778	GIOTTO 305 4000K RECESSED 1-10V MW SENSOR	
3034783	GIOTTO 305 3000K RECESSED EMERGENCY	✓
3034782	GIOTTO 305 4000K RECESSED EMERGENCY	✓
3034787	GIOTTO 305 3000K RECESSED 1-10V EMERGENCY	✓
3034786	GIOTTO 305 4000K RECESSED 1-10V EMERGENCY	✓
3034791	GIOTTO 305 3000K RECESSED DALI EMERGENCY	✓
3034790	GIOTTO 305 4000K RECESSED DALI EMERGENCY	✓

Giotto 305 surface mounted



Giotto 305 Surface		
3034765	GIOTTO 305 3000K SURFACE	
3034764	GIOTTO 305 4000K SURFACE	
3034769	GIOTTO 305 3000K SURFACE 1-10V	
3034768	GIOTTO 305 4000K SURFACE 1-10V	
3034773	GIOTTO 305 3000K SURFACE DALI	
3034772	GIOTTO 305 4000K SURFACE DALI	
3034777	GIOTTO 305 3000K SURFACE MW SENSOR	
3034776	GIOTTO 305 4000K SURFACE MW SENSOR	
3034781	GIOTTO 305 3000K SURFACE 1-10V MW SENSOR	
3034780	GIOTTO 305 4000K SURFACE 1-10V MW SENSOR	
3034785	GIOTTO 305 3000K SURFACE EMERGENCY	✓
3034784	GIOTTO 305 4000K SURFACE EMERGENCY	✓
3034789	GIOTTO 305 3000K SURFACE 1-10V EMERGENCY	✓
3034788	GIOTTO 305 4000K SURFACE 1-10V EMERGENCY	✓
3034793	GIOTTO 305 3000K SURFACE DALI EMERGENCY	✓
3034792	GIOTTO 305 4000K SURFACE DALI EMERGENCY	✓

Giotto 335 recessed



Giotto 335 Recessed		
3034795	GIOTTO 335 3000K RECESSED	
3034794	GIOTTO 335 4000K RECESSED	
3034799	GIOTTO 335 3000K RECESSED 1-10V	
3034798	GIOTTO 335 4000K RECESSED 1-10V	
3034803	GIOTTO 335 3000K RECESSED DALI	
3034802	GIOTTO 335 4000K RECESSED DALI	
3034807	GIOTTO 335 3000K RECESSED MW SENSOR	
3034806	GIOTTO 335 4000K RECESSED MW SENSOR	
3034811	GIOTTO 335 3000K RECESSED 1-10V MW SENSOR	
3034810	GIOTTO 335 4000K RECESSED 1-10V MW SENSOR	
3034815	GIOTTO 335 3000K RECESSED EMERGENCY	✓
3034814	GIOTTO 335 4000K RECESSED EMERGENCY	✓
3034819	GIOTTO 335 3000K RECESSED 1-10V EMERGENCY	✓
3034818	GIOTTO 335 4000K RECESSED 1-10V EMERGENCY	✓
3034823	GIOTTO 335 3000K RECESSED DALI EMERGENCY	✓
3034822	GIOTTO 335 4000K RECESSED DALI EMERGENCY	✓

Dimmable

SylSmart Connected
SylSmart Standalone

SYLVANIA



NEW

Novella


Durable and flexible bulkhead for indoor and outdoor applications

- IP66 & IK10 rated
- Multipower & Multi CCT
- Microwave versions with corridor feature

sylvania-group.com

Digital | Lighting | Solutions

Giotto 335 surface mounted



Giotto 335 Surface		
3034797	GIOTTO 335 3000K SURFACE	
3034796	GIOTTO 335 4000K SURFACE	
3034801	GIOTTO 335 3000K SURFACE 1-10V	
3034800	GIOTTO 335 4000K SURFACE 1-10V	
3034805	GIOTTO 335 3000K SURFACE DALI	
3034804	GIOTTO 335 4000K SURFACE DALI	
3034809	GIOTTO 335 3000K SURFACE MW SENSOR	
3034808	GIOTTO 335 4000K SURFACE MW SENSOR	
3034813	GIOTTO 335 3000K SURFACE 1-10V MW SENSOR	
3034812	GIOTTO 335 4000K SURFACE 1-10V MW SENSOR	
3034817	GIOTTO 335 3000K SURFACE EMERGENCY	
3034816	GIOTTO 335 4000K SURFACE EMERGENCY	
3034821	GIOTTO 335 3000K SURFACE 1-10V EMERGENCY	
3034820	GIOTTO 335 4000K SURFACE 1-10V EMERGENCY	
3034825	GIOTTO 335 3000K SURFACE DALI EMERGENCY	
3034824	GIOTTO 335 4000K SURFACE DALI EMERGENCY	
3098790	GIOTTO 335 SURFACE 4K SSA01D	
3098789	GIOTTO 335 SURFACE 4000K SSA01D QBM EM3LifePo	
3098882	GIOTTO 335 SURFACE 3000K SSA01D EM3	
3098883	GIOTTO 335 SURFACE 3000K SSA01D	


Novella

SYLVANIA

PRO



Formerly START Surface IP66. A range of vandal-resistant portholes with diameters of 220 mm and 300 mm, perfect for indoor and outdoor applications. Luminous flux up to 2800 lm with efficiency up to 147 lm/W. Model with fully configurable motion detection to optimise energy consumption or adapt to specific uses such as corridors. Adjustable time delay, preset switch-off time, daylight sensitivity (3 levels), sensitivity and lighting intensity. Easy selection between 3 different luminous flux levels using the integrated DIP switches. The integrated switch allows you to choose between warm white (3000K) and neutral white (4000K) colour temperatures. 3-hour self-testing emergency units can be added to each luminaire. A cover is available as an accessory. IK10 and vandal-proof screws (+ screw cover). Lifespan: 118,000 hours (L80). 5-year warranty.

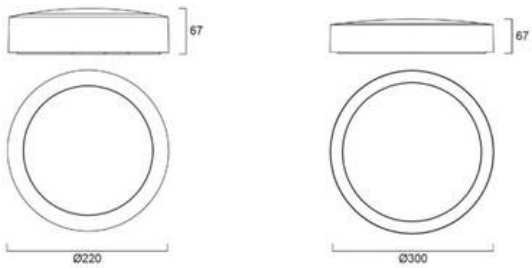

Novella IP66 220mm	
0040050	Novella 220 IP66 Small 720-1525lm 830/840 Black
0040150	Novella 220 IP66 Small 740-1550lm 830/840 White
0040052	Novella 220 IP66 Small 720-1525lm 830/840 MW Black
0040152	Novella 220 IP66 Small 740-1550lm 830/840 MW White
0040054	Novella 220 IP66 Small 1600/1725lm 830/840 DALI Black
0040154	Novella 220 IP66 Small 1625/1750lm 830/840 DALI White

Novella IP66 300mm	
0040051	Novella 300 IP66 Large 1025-2750lm 830/840 Black
0040151	Novella 300 IP66 Large 1050-2800lm 830/840 White
0040053	Novella 300 IP66 Large 1025-2750lm 830/840 MW Black
0040153	Novella 300 IP66 Large 1050-2800lm 830/840 MW White
0040055	Novella 300 IP66 Large 2575/2800lm 830/840 DALI Black
0040155	Novella 300 IP66 Large 2600/2850lm 830/840 DALI White

Accessories	
0040056	Novella IP66 Small Trim Ring Black
0040057	Novella IP66 Small Trim Ring White
0040065	Novella IP66 EM3 KIT for Small
0040064	Novella IP66 MW Corridor Sensor KIT
0040062	Novella IP66 Large Eyelid Black
0040063	Novella IP66 Large Eyelid White
0040058	Novella IP66 Large Trim Ring Black
0040059	Novella IP66 Large Trim Ring White
0040066	Novella IP66 EM3 KIT for Large
0040060	Novella IP66 Small Eyelid Black
0040061	Novella IP66 Small Eyelid White

Dimmable

SylSmart Connected
SylSmart Standalone


Pixo Surface

SYLVANIA

PRO



Pixo Surface Mounted forms one family with the Pixo rail spots. Minimal, slim and integral design. Easily replaceable lens system, included in the packaging: choose between standard beam angle - 36 degrees or 54 degrees. 1 size: D.81mmx150mm. Luminous flux up to 3200 lms (4000 K). Increased efficiency up to 117lm/w. High colour rendering index, CRI> 90. High colour consistency, SDCM 3 LED source (at 2700K and 4000K). 3-CCT switch on the product housing, colour temperature 2700K – 3000K – 4000K. Multipower and DALI versions are available as standard. Multipower versions with 8 settings to meet all installation needs in one product (selection between 950 lm; 1200 lm; 1450 lm; 1650 lm; 1850 lm; 2300 lm; 2700 lm; 3150 lm). Push-in connections for quick installation. Available in black or white. Lifetime: 100,000 hours (L90). 5-year warranty.



Pixo Surface Multipower	
0004703	Pixo Surface 3150lm 3CCT MB WB Multipower White
0004704	Pixo Surface 3150lm 3CCT MB WB Multipower Black

Pixo Surface DALI	
0004723	Pixo Surface 3200lm 3CCT MB WB DALI White
0004724	Pixo Surface 3200lm 3CCT MB WB DALI Black


Pixo Surface accessories	
0004717	Pixo Medium 80 Reflector Kit Golden x 4
0004718	Pixo Medium 80 Reflector Kit Black x 4
0004531	Pixo Medium 80 Snoot Accessory
0004534	Pixo Medium 80 Barn Door Accessory
0004537	Pixo Medium 80 Honeycomb Accessory

START Surface IP54 Multipower


SYLVANIA

START


LED window for residential lighting, wall or ceiling installation. Multipower: 4 easily adjustable light outputs via DIP switch. Dual colour temperature 3000K/4000K. IP54, ideal for use in bathrooms. Versions with MW (microwave) or PIR (infrared) sensors enable automatic switching on/off when presence is detected, as well as minimum light level control for maximum energy savings. Diameter: 300mm. Integrated quick-connect and reusable connector (LiLo). Photobiological risk group: GR0. Lifespan: 120,000 hours (L70). 5-year warranty.



START Surface IP54 Multipower 300mm	
0043405	START Surface IP54 500-2000lm 830/840
0043406	START Surface IP54 MW 500-2000lm 830/840



START Surface IP54 Multipower PIR 300mm	
0043407	START Surface IP54 PIR 450-1800lm 830/840



START Surface IP54 Multipower 400mm	
0043409	START Surface IP54 2500-4000lm 830/840
0043410	START Surface IP54 MW 2500-4000lm 830/840
0043413	START Surface IP54 2500-4000lm 830/840 EM

Dimmable


SylSmart Connected
SylSmart Standalone

START Surface Slim IP54

SYLVANIA


START

Robust, slim LED luminaires for wall or ceiling mounting, developed for corridors, kitchens, bathrooms and wet areas. Available in four diameters: 220mm, 280mm, 330mm or 400mm. Square design available in two sizes: 280x280mm, 400x400mm. IP54 protection rating for the entire series and IK07 opal diffuser. Switch between colour temperatures of 3000K and 4000K. High efficiency up to 114lm/W (4000K). CRI> 80. The range includes a phase dimming option (excluding MW versions). Lifespan: (L70) 58,000 hours as standard and 65,000 hours in the MW version. 5-year warranty.




START Surface Slim IP54 Dimmable 220mm Round

⚠	0043510	START SURFACE SLIM IP54 ROUND 1500LM 2CCT D WH




START Surface Slim IP54 Dimmable 280mm Round

⚠	0043511	START SURFACE SLIM IP54 ROUND 1900LM 2CCT D WH
	0043514	START SURFACE SLIM IP54 ROUND 1900LM 2CCT MW WH




START Surface Slim IP54 Dimmable 330mm Round

⚠	0043512	START SURFACE SLIM IP54 ROUND 2500LM 2CCT D WH




START Surface Slim IP54 Dimmable 400mm Round

⚠	0043513	START SURFACE SLIM IP54 ROUND 4000LM 2CCT D WH



START Surface Slim IP54 Dimmable 280mm Square

⚠	0043517	START SURFACE SLIM IP54 SQUARE 1900LM 2CCT D WH



START Surface Slim IP54 Dimmable 400mm Square

⚠	0043519	START SURFACE SLIM IP54 SQUARE 4000LM 2CCT D WH

⚠ Dimmable


SylSmart Connected
SylSmart Standalone

Nilo


Concord

A striking yet discreet design. Minimalist housing with a standard 60 mm wide profile. Two diameter sizes: 800 mm and 1140 mm. 360° curved housing with exceptional photometric performance. Up to 5980lm for 800mm versions and 9570lm for 1140mm versions. Can be mounted at different heights to create attractive installations. Direct/indirect lighting. Integrated emergency versions available as standard. Expected lifetime: 50,000 hrs (L80). 5-year warranty.





Nilo 800		
2050600	Nilo 800 Direct/Indirect 3000K DALI White	
2050601	Nilo 800 Direct/Indirect 4000K DALI White	
2050602	Nilo 800 Direct/Indirect 3000K DALI Black	
2050603	Nilo 800 Direct/Indirect 4000K DALI Black	
2050604	Nilo 800 Direct/Indirect 3000K DALI EMWhite	
2050605	Nilo 800 Direct/Indirect 4000K DALI EM White	
2050606	Nilo 800 Direct/Indirect 3000K DALI EM Black	
2050607	Nilo 800 Direct/Indirect 4000K DALI EM Black	



Nilo 1200		
2050608	Nilo 1200 Direct/Indirect 3000K DALI White	
2050609	Nilo 1200 Direct/Indirect 4000K DALI White	
2050610	Nilo 1200 Direct/Indirect 3000K DALI Black	
2050611	Nilo 1200 Direct/Indirect 4000K DALI Black	
2050612	Nilo 1200 Direct/Indirect 3000K DALI EM White	
2050613	Nilo 1200 Direct/Indirect 4000K DALI EM White	
2050614	Nilo 1200 Direct/Indirect 3000K DALI EM Black	
2050615	Nilo 1200 Direct/Indirect 4000K DALI EM Black	


Accessories	
2050650	Nilo 800 Straight Suspension Kit White
2050651	Nilo 800 Straight Suspension Kit Black

Solstice

Concord

Solstice pendant features a high quality die-cast aluminum body with a 196 mm diameter and injection-molded top hat, offering a maximum drop of 2.2 m, including the fixture. The pendant provides functional downlighting with an output ranging from 2,380 to 3,400 lumens, complemented by uplighting up to 600 lumens, creating a distinctive halo backlight that enhances ambience. It offers efficacy up to 133 lm/W and supports colour temperatures of 3000K and 4000K. Available in golden, black and white reflector finishes. Lifetime : 89,000 hrs (L80). 5-years warranty.





Solstice Pendant		
2070215	Solstice 200 3280 930 DALI Pendant Direct/Indirect	
2070216	Solstice 200 3400 940 DALI Pendant Direct/Indirect	
2070398	Solstice 200 2380 930 DALI Pendant Direct/Ind BB	
2070399	Solstice 200 2500 940 DALI Pendant Direct/Ind BB	
2070400	Solstice 200 3280 930 DALI Pendant Direct/Ind WW	
2070401	Solstice 200 3400 940 DALI Pendant Direct/Ind WW	
2070402	Solstice 200 2400 930 DALI Pendant Direct/Ind GB	
2070403	Solstice 200 2800 940 DALI Pendant Direct/Ind GB	
2070404	Solstice 200 2400 930 DALI Pendant Direct/Ind SB	
2070405	Solstice 200 3400 940 DALI Pendant Direct/Ind SB	

Solstice Pendant Accessories	
2070219	Solstice Pendant Accessory White
2070220	Solstice Pendant Accessory Black

Dimmable

SylSmart Connected
SylSmart Standalone


Pixo

PRO

SYLVANIA



Pixo Pendant & Surface creates a platform with Pixo track light. Minimal, slim and integral design. Extremely precise light beams due to the high-quality lenses. Easily replaceable lens system, included in the packaging: choose between the standard light beam angle - 36 degree or 54-degree beam angle. 1 body size: D.81mmx150mm. Lumen output up to 3200lms (4000K). Increased efficacy up to 117lm/w. High colour rendering index, CRI>90. High colour consistency, SDCM≤3 LED source (at 2700K and 4000K). 3-CCT switch on the housing of the product, 2700K – 3000K – 4000K light colour temperature. Multipower and DALI dimmable versions are available as standard. Multipower versions with 8 settings to meet all installation needs in one single product (selection between 950lm; 1200lm; 1450lm; 1650lm; 1850lm; 2300lm; 2700lm; 3150lm). Pixo Pendant complete with 1.2m suspension cable, and a ceiling rose. Push-in terminals for quick installation in the ceiling box. Available in black and white housing colour. Lifespan: 100,000h (L90). 5 years warranty.



Pixo Pendant	
0004701	Pixo Pendant 3150lm 3CCT MB WB Multipower White
0004702	Pixo Pendant 3150lm 3CCT MB WB Multipower Black
0004721	Pixo Pendant 3200lm 3CCT MB WB DALI White
0004722	Pixo Pendant 3200lm 3CCT MB WB DALI Black

Accessories	
0004717	Pixo Medium 80 Reflector Kit Golden x 4
0004718	Pixo Medium 80 Reflector Kit Black x 4
0004531	Pixo Medium 80 Snoot Accessory
0004534	Pixo Medium 80 Barn Door Accessory
0004537	Pixo Medium 80 Honeycomb Accessory


Flex Pro

PRO


SYLVANIA



A range of thin, flexible LED strips with CRI90 LED chips in 3 versions: Low output 2,300 lm with 300 LED chips per 5m / Medium output 4,800 lm with 600 LED chips per 5m / High output 8,900 lm with 400 LED chips per 5m (always to be used with an aluminium profile). IP65 for kitchens and bathrooms. IP67 for outdoor installation. Available in 3000K / 4000K CRI80 versions. High output (HO) versions require aluminium profiles to ensure heat dissipation from the LEDs. Supplied with 3m of adhesive tape. IP65 versions supplied with fixing clips and end caps. Beam angle: 120°. SDCM<3 for even colour distribution along the strip. Supplied in 5m rolls. Expected lifetime: 54,000 hrs (L80). 5-year warranty.



Flex Pro IP65 Low Output	
0068172	Flex Pro IP65 2250lm 930
0068173	Flex Pro IP65 2300lm 940



Flex Pro IP65 Medium Output	
0068180	Flex Pro IP65 4400lm 930
0068181	Flex Pro IP65 4800lm 940

Dimmable

SylSmart Connected
SylSmart Standalone

Flex Pro Drivers


SYLVANIA

PRO


IP20




Range of constant voltage LED drivers for Flex Pro light strips. IP20 standard, IP67 standard, 1-10V dimmable, DALI dimmable, SylSmart® dimmable drivers. SylSmart® dimmable drivers (SSC) are wireless dimmable drivers that allow you to control white LED strips without the need for an additional external dimmer. 5-year warranty.




Flex Pro IP65 High Output	
0068188	Flex Pro IP65 8250lm 930
0068189	Flex Pro IP65 8900lm 940




Flex Pro IP67 High Output Outdoor	
0068204	Flex Pro IP67 7900lm 930
0068191	Flex Pro IP67 8200lm 940



Accessories - Compatible with Flex Pro IP67	
0068035	Flex Pro IP67 STRAIGHT CONNECTOR IP65 x5
0068036	Flex Pro IP67 STRAIGHT CONN IP65 X 5 +2M LEAD
0068037	Flex Pro IP67 CORNER CONNECTOR IP65 X 5
0068007	Flex Pro IP65 Straight Conn x 10 (PCB TO PCB)
0068027	Flex Pro IP65 Straight Connector x 5+2m Lead
0068012	Flex Pro IP65 Corner Connector x 5
0068008	Flex Pro HO IP65 Straight Conn x 10
0068028	Flex Pro HO IP65 STRAIGHT CONN X 5 +2M LEAD
0068009	Flex Pro HO IP65 Corner Connector x 5




Driver Standard IP20	
9014921	CV Driver 35W 24V (87501050)
9014922	CV Driver 60W 24V (87501051)
9014923	CV Driver 100W 24V (87501052)
9014924	CV Driver 200W 24V (87501053)




Driver Standard IP67	
9014932	CV Driver 35W 24V IP67 (28003295)
9014935	CV Driver 200W 24V IP67 (28003298)

Dimmable

SylSmart Connected
SylSmart Standalone



Driver DALI	
9014925	CV Driver DALI 35W 24V (28004430)
9014926	CV Driver DALI 60W 24V (28004431)
9014927	CV Driver DALI 100W 24V (28004432)
9014928	CV Driver DALI 200W 24V (28004433)



Driver SylSmart® Standalone	
9014913	CV Driver SSC 35W 24V (28002415)
9014915	CV Driver SSC 100W 24V (28002417)
9014916	CV Driver SSC 150W 24V (28002418)


Aluminium Profile

SYLVANIA


PRO




High-quality aluminium profiles, end caps and brackets for covering START Flex light strips, if necessary. Anodised surface for corrosion resistance. NB: an aluminium profile acts as a heat sink, thereby extending the life of the strip. The anodised aluminium finish (with the exception of the HO surface of the profile, which is raw aluminium) makes the profiles corrosion-resistant. All parts required for installation are included in the package. Sets with lengths of 2m or 3m. A profile kit consists of an anodised aluminium profile, a diffuser, supports and end caps. Recessed, surface or corner mounting. All accessories (end caps, mounting clips) are supplied in a bag of 2. They are essential for combining profiles and strips. 3-year warranty.



Profile shallow narrow 14 (24x9)	
0021594	Profile shallow narrow 14 (24x9) 2m SET
0021588	Profile shallow narrow 14 (24x9) 2m SET BW
0022682	Profile shallow narrow 14 (24x9) 3m SET




Profile semi deep surface 16 (19x19)	
0021596	Profile semi deep surface 16 (19x19) 2m SET
0021589	Profile semi deep surface 16 (19x19) SET BW
0022683	Profile semi deep surface 16 (19x19) 3m SET




Profile corner surface 14 (24x19)	
0021595	Profile corner surface 14 (24x19) 2m SET
0021576	Profile corner surface 14 (24x19) 2m SET BW
0022684	Profile corner surface 14 (24x19) 3m SET

Dimmable


SylSmart Connected
SylSmart Standalone




Profile semi deep surface 20 (23x25)	
0021568	Profile semi deep surface 20 (23x25) 2m SET
0021574	Profile semi deep surface 20 (23x25) 2m SET BW
0022685	Profile semi deep surface 20 (23x25) 3m SET



Profile recess 20 (30x20)	
0021570	Profile recess 20 (30x20) 2m SET
0021575	Profile recess 20 (30x20) 2m SET BW
0022686	Profile recess 20 (30x20) 3m SET



Profile deep wide suface 30 (33x30)	
0021571	Profile deep wide surface 30 (33x30) 2m SET
0021578	Profile deep wide surface 30 (33x30) 2m SET BW
0022687	Profile deep wide surface 30 (33x30) 3m SET



Profile HO Surface 16 (20x4)	
0022604	Profile HO Surface 16 (20x4) raw alu. 2m
0022613	Profile HO Surface 16 (20x4) raw alu. 3m

Spare parts	
0022635	End caps Recess 20 (x2)
0022636	End caps Semi deep surface 16 (x2)
0022637	End caps Semi deep surface 20 (x2)
0022639	End caps Deep wide surface 30 (x2)
0022640	End caps Shallow narrow (x2)
0022641	End caps Corner surface 14 (x2)
0022667	End caps shallow narrow 14 Black
0022668	End caps semi deep surface 16 Black

Spare parts	
0022669	End caps corner surface 14 Black
0022670	End caps semi deep surface 20 Black (x2)
0022671	End caps recess 20 Black
0022672	End caps deep wide surface 30 Black
0022673	End caps shallow wide surface 30 Black
0022674	End caps H 30 Black
0022643	Holder U4 inox (x2)
0022644	Holder U7 recess (x2)
0022645	Holder T (x2)

Additional Accessories	
0022647	Double sided tape 15mm x 50m
0021587	20M roll of F click diffuser
0022651	Suspension Kit 1500 STD CHROME
0022652	Suspension Kit 1500 50V SILVER
0049055	Profile shallow narrow 14 2m SET

Dimmable

SylSmart Connected
SylSmart Standalone


Concord Beacon Muse II

Concord




Compact 21W LED spotlight with a sleek design and robust aluminium body. MUSE: adjustable optics allowing beam adjustment from 8° to 55°. IRC97, ideal for lighting museums, art galleries and exhibition halls. Available in 3000K / 4000K versions. Optimal heat dissipation to limit the junction temperature of the LED. Minimalist design, body made entirely of cast aluminium. Available in Individual Dimming (On Board), Phase Dimming, DALI or SylSmart® Standalone. Mounting on 3-circuit track (Lytespan/ OneTrack). IR/UV-free light source with no heat radiation. Lifespan: 69,500 hrs (L90).

5-year warranty.




	Trailing Edge Dimmer	
	2059742	Beacon Muse II CRI97 3000K L3 Black
	2059743	Beacon Muse II CRI97 3000K L3 White
	2059750	Beacon Muse II CRI97 4000K L3 Black
	2059751	Beacon Muse II CRI97 4000K L3 White

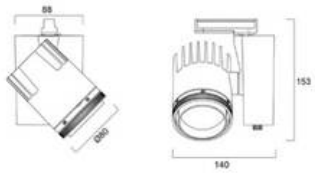

	On-Board Dimming	
	2059744	Beacon Muse II CRI97 3000K L3 On-Board Dim Black
	2059745	Beacon Muse II CRI97 3000K L3 On-Board Dim White
	2059752	Beacon Muse II CRI97 4000K L3 On-Board Dim Black
	2059753	Beacon Muse II CRI97 4000K L3 On-Board Dim White

	SylSmart® Standalone Dimmable	
	2059748	Beacon Muse II CRI97 3000K L3 SSC01 Black
	2059749	Beacon Muse II CRI97 3000K L3 SSC01White
	2059756	Beacon Muse II CRI97 4000K L3 SSC01 Black
	2059757	Beacon Muse II CRI97 4000K L3 SSC01 White



	DALI dimmable	
	2693017	Beacon Muse II CR97 3000K DALI L3 ST Adaptor Black
	2693774	Beacon Muse II CR97 3000K DALI L3 ST Adaptor White
	2999885	Beacon Muse II CR97 4000K DALI L3 ST Adaptor Black
	2999886	Beacon Muse II CR97 4000K DALI L3 ST Adaptor White

	Accessories	
	2692039	Beacon Muse II CRI97 3000K DALI White 2059747 GLB
	2059760	Beacon Muse II Elongation Lens
	2691993	Beacon Muse II CRI97 3000K O/B Black 2059744 GLB
	2059758	Beacon Snoot
	2059761	Beacon Muse II Honeycomb
	2059759	Beacon Muse II Softener Lens
	2058327	Beacon/Beacon Muse II Barn Doors
	9200751	OneTrack Surface Fix Point White 9000/bpu-d-w
	9200752	OneTrack Surface Fix Point Black 9000/bpu-d-b
	9200753	OneTrack Recessed Box Fix Point White 9000/bru-w
	9200754	OneTrack Recessed Box Fix Point Black 9000/bru-b

Dimmable

SylSmart Connected
SylSmart Standalone